




PRODUCT DIMENSIONS & SPECIFICATIONS

DX-TREME CC SERIES LIGHT COMMERCIAL CASED UPFLOW COILS

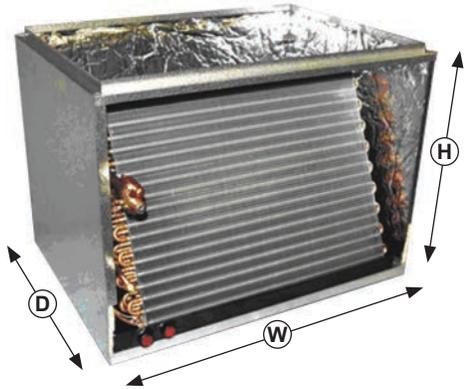

STANDARD SPECIFICATIONS

- Riffled copper tubing, aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- 3/4" FPT plumbing connections
- Left-hand refrigerant and plumbing connections.
- Factory-mounted TXV (R-410a - AC & HP compatible, R22 - AC only).
- Powder-painted galvanized steel drain pans. Stainless available.
- Embossed galvanized cabinets standard. Cabinets feature furnace connectors (patent pending).
- Upflow only. (Slab horizontal coils also available.)
- Split access doors in front for easy service.
- Fully insulated cabinets with faced insulation.
- Five-year limited warranty.
- ETL listed for use with R410a when proper metering device is used.

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance.

COIL MODEL	DIMENSIONS				SUCTION LINE	LIQUID LINE	SHIPPING INFORMATION	
	CABINET WIDTH [W]"		CABINET DEPTH [D]"	CABINET HEIGHT [H]"			SHIPPING WEIGHT (LBS)	SKID QTY
	MIN WIDTH	MAX WIDTH						
SINGLE CIRCUIT COILS								
CC072A34-XXXX-000	30	36	21-1/2	22	7/8	3/8	84	4
CC072B34-XXXX-000	36	42	21-1/2	22	7/8	3/8	105	4
CC072C34-XXXX-000	42	48	21-1/2	22	7/8	3/8	126	4
CC090A34-XXXX-000	36	42	21-1/2	22	1-1/8	1/2	105	4
CC090B34-XXXX-000	42	48	21-1/2	22	1-1/8	1/2	126	4
CC090C34-XXXX-000	48	54	21-1/2	22	1-1/8	1/2	147	4
CC120A34-XXXX-000	36	42	21-1/2	22	1-1/8	1/2	105	4
CC120B34-XXXX-000	42	48	21-1/2	22	1-1/8	1/2	126	4
CC120C34-XXXX-000	48	54	21-1/2	22	1-1/8	1/2	147	4
CC120D44-505R-000	50-1/2	50-1/2	21-1/2	22	1-1/8	1/2	140	4
DOUBLE CIRCUIT COILS								
CC072A44-XXXX-120	30	36	21-1/2	22	7/8	3/8	103	4
CC072B44-XXXX-120	36	42	21-1/2	22	7/8	3/8	128	4
CC072C44-XXXX-120	42	48	21-1/2	22	7/8	3/8	154	4
CC090A44-XXXX-120	36	42	21-1/2	22	1-1/8	1/2	128	4
CC090B44-XXXX-120	42	48	21-1/2	22	1-1/8	1/2	154	4
CC090C44-XXXX-120	48	54	21-1/2	22	1-1/8	1/2	180	4
CC120A44-XXXX-120	36	42	21-1/2	22	1-1/8	1/2	128	4
CC120B44-XXXX-120	42	48	21-1/2	22	1-1/8	1/2	154	4
CC120C44-XXXX-120	48	54	21-1/2	22	1-1/8	1/2	180	4

Notes: Slabs are oriented with delta plates facing the side walls of the cabinet. Refrigerant and plumbing connections exit cabinet front. Top duct opening size can be obtained by subtracting 1-1/2 from width or depth. Bottom duct opening size can be obtained by subtracting 3/4 from width or depth. CC120D coil available only in 50 1/2" width, but can fit multiple furnace dimensions with supplied block off plates.

Dual Circuit Commercial Coils	Single Circuit R22 TXV	Single Circuit R410A TXV	Dual Circuit Use 2 R22 TXV	Dual Circuit Use 2 R410A TXV
CC72**[*]	(X) 4195	(4) 4202	(X) 4190	(4) 4200
CC90**[*]	(X) 3946	(4) 3947+3948	(X) 4195	(4) 4202
CC120**[*]	(X) 3940	(4) 3947+3948	(X) 4195	(4) 4202

Phone: 281.441.6500
Toll Free: 800.423.9007
Fax: 281.441.6510
www.aspenmfg.com



* For complete warranty details visit www.aspenmfg.com.

Revised 02/24/17. In keeping with its policy of continuous progress and product improvement, Aspen reserves the right to make changes without notice and incurring obligation. © 2016