Job Name:	
Tag#	



Submittal Data Sheet

CDXS18LVJU

1.5-Ton Ducted Concealed Indoor Unit



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. If product is installed in a commercial application, limited warranty period is 5 years.


Electrical *208/230V				
	Cooling	Heating		
Running Current (Rated) (A)	.79/.79*	.79/.79*		
Power Consumption (Rated) (W)	172/172*	172/172*		

Indoor Specifications						
	Cooling		Heating			
Airflow Rate (cfm)	Н		M	Н	М	
	424		388	424	388	
	L		SL	L	SL	
	353		297	353	297	
Sound (dBA)	37 / 35 / 33		/ 22 / 21	37 / 35 / 33 / 31		
H/M/L/SL			7 33 / 31			
Dimensions (H × W × D) (in)		7-7/8 × 35-7/16 × 24-7/16				
Weight (Lbs)		60				
Nominal Capacity (Btu/hr)		18,000				
*See Outdoor Unit for Rated Capacities						

Piping	
Liquid (in)	1/4
Gas (in)	1/2
Drain (in)	25/32

CDXS18LVJU Dimensional Data



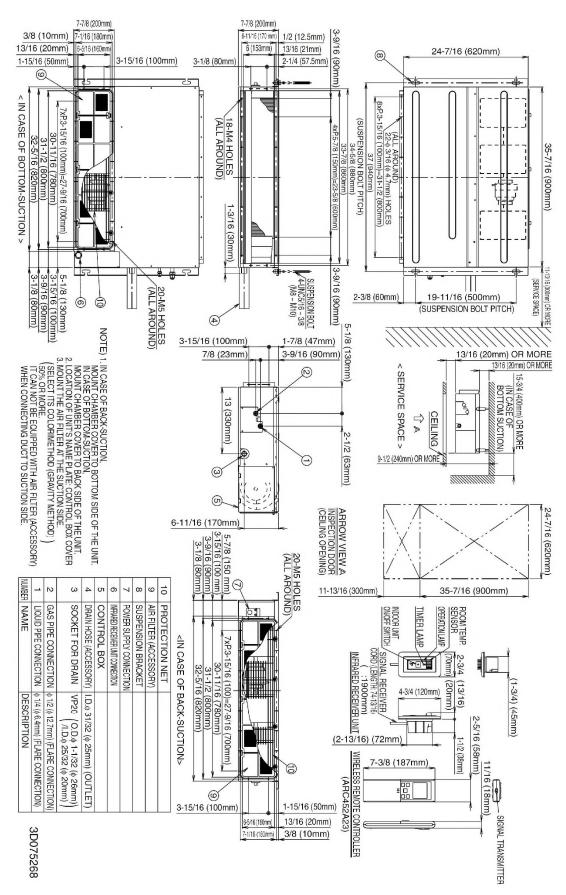

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


Optional Accessories



Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller kit
	BRCW901A08	Wired Remote Controller Cable – 25 ft (included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10ft
	DACA-ARCW901P10	IR Receiver Cable, Plenum Rated, 10ft
	DACA-ARCW901P25	IR Receiver Cable, Plenum Rated, 25ft
	DACA-CP2-1	Maxi Orange Condensate Pump
	DACA-CP3-1	Mini Condensate Pump 5 gph
	KRP928BB2S	Interface adaptor for DIII-NET
	KDT25N50	15, 18 Class Insulation kit for high humidity

External Static Pressure / Airflow Chart



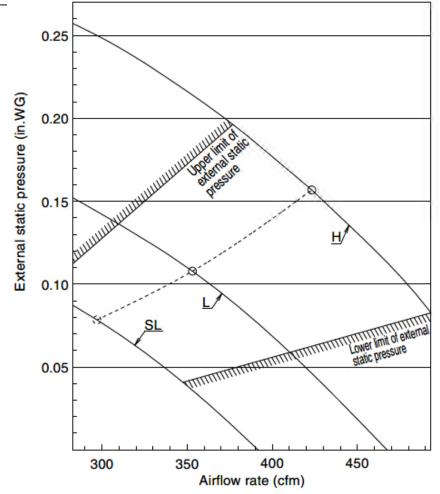

Submittal Revision Date: September 2018