


**SUBMITTAL RECORD**

JOB \_\_\_\_\_  
 LOCATION \_\_\_\_\_  
 SUBMITTED TO \_\_\_\_\_  
 SUBMITTAL PREPARED BY \_\_\_\_\_  
 APPROVED BY \_\_\_\_\_  
 DATE \_\_\_\_\_



**Submittal Form**  
**FL**  
**Fire Damper Hardware**

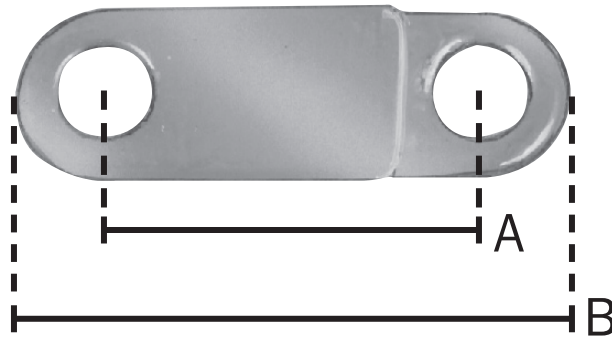

All fusible links are listed by  
 Underwriter's Laboratories, Inc.

FIRE DAMPER HARDWARE					
ITEM#	CODE	DESCRIPTION	DIM. A	DIM. B	QUANTITY
2032	FLS39	temperature rating 165 <sup>0</sup> 10 pound load	1"	1-1/2"	100
2033	FL43	temperature rating 165 <sup>0</sup> 30 pound load	1-3/4"	2-9/16"	100
2034	FL41	temperature rating 212 <sup>0</sup> 30 pound load	1-3/4"	2-9/16"	100
2035	FL42	temperature rating 386 <sup>0</sup> 30 pound load	1-3/4"	2-9/16"	100

Duro Dyne East Division, Bay Shore, NY  
 Duro Dyne Midwest Division, Fairfield, OH  
 Duro Dyne West Division, Fontana, CA  
 Duro Dyne Canada, Lachine, Quebec, Canada

631-249-9000 Fax: 631-249-8346  
 513-870-6000 Fax: 513-870-6005  
 562-926-1774 Fax: 562-926-5778  
 514-422-9760 Fax: 514-636-0328

www.durodyne.com E-mail: durodyne@durodyne.com



©2016 Duro Dyne Corporation  
 Printed in USA 7/16  
 BO008456