



FASSON® 950 BLACK


10 mil industrial grade cloth tape used for sealing joints and seams in HVAC applications.

FEATURES:

- Rubber based adhesive
- Scrim reinforced facestock
- Available in silver and black

BENEFITS:

- Aggressive tack and adhesion for an airtight, moisture-free seal
- Straight tearing during application with no curl
- Tested in accordance with UL 723

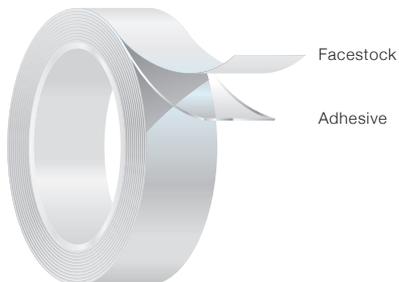

CONSTRUCTION:

Adhesive:

Rubber Based

Carrier:

Scrim facestock

FASSON® 950 BLACK

Physical Properties	Typical Values		
THICKNESS	US Mils	MM's	
Carrier	8.0	0.20	
Adhesive	2.1	0.05	
Total	10.1	0.26	
*PSTC-133			
PEEL ADHESION			
Product 180° 12" / min			
Substrate	Lbf / in	US Oz / in	N / Meter
SS	4.0	63	692
*PSTC-101, ASTM D-3330, STD-10			
QUICK STICK			
Product 180° 12" / min			
Substrate	Lbf / in	US Oz / in	N / Meter
SS	1.1	17	184
*PSTC-101, ASTM D-3330, STD-10			
TENSILE			
Product 180°			
Substrate	Lbf / in	US Oz / in	N / Meter
Product	27.0	432	4728
*PSTC-131, STD-3A,B,C			
ELONGATION			
Product 180°			
Substrate	% @ Break		
Product	16		
*PSTC-131, STD-3A,B,C			
STATIC SHEAR			
Product @ 72°F / 22°C 1" sq (6.5 cm ²) 1000 g			
Substrate	Min to Fail		
SS	>1,440		
*PSTC-107, ASTM D 3654, STD-9			
TEMPERATURE			
Min Application Temp	50°F	10°C	
Max Intermittent Operating Temp	200°F	93°C	
*TEST METHODS			

Note: The listed values are typical only and not intended to serve as product specifications

APPLICATION TECHNIQUES

- It is essential with all pressure-sensitive tapes the application surface is clean, dry and free of grease and oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (firm / rigid) surface achieves different performance

STORAGE AND SHELF LIFE

The shelf life of the product is one year when stored at 18-22°C / 64-72°F, 30-70% relative humidity and out of direct sunlight, in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2012 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery™, AFB™ and all other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

South America
Rua Francisco Foga, 225
13280-000 Vinhedo
SP Brazil
Phone: +55 19 3876 7736
Fax: +55 19 3876 7682

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit Tapes.AveryDennison.com