


Mueller Streamline Co.
Address: 8285 Tournament Dr., Suite 150

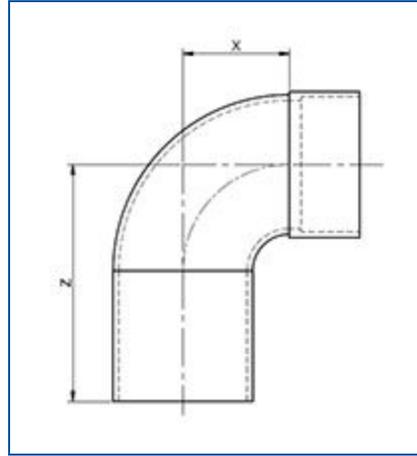
Memphis, TN 38125

Ph: 901-753-3200

Email: contact@muellerindustries.com
Web: <http://www.muellerindustries.com/>

Item # X 02817, 90° Long Radius Elbow, FTG x C, 1/2" x 1/2"

Streamline® XHP™ Copper-Iron Fittings for use in refrigeration applications. Available sizes ranging from 3/8" to 2-1/8" for continuous 130 BAR / 1885 PSI pressure ratings at 120°C / 250°F.


[Specifications](#) | [Dimensions](#) | [Details](#)

Specifications

Weight	0.037 lb
Material¹	COPPER-IRON
Operating Temperature [Max]	250 °F
Operating Pressure [Max]	1885 psi
End Type	Fitting
End Size	1/2 in
Second End Type	Cup (Braze)
Second End Size	1/2 in
Standards	Copper-iron (CuFe2P) UNS C19400 130 BAR / 1,885 PSI 120°C / 250°F

Dimensions

Overall Length	1.25 in
Overall Height	1.37 in
Overall Width	0.58 in
X	0.65 in
Z	1.08 in

Details

Qty Pcs / Bag	5
Master Qty Pcs / Box	100
Mueller Description	1/2OD FTG X C LR 90 ELL
Key Specifications	Streamline® XHP™ Copper Fittings is third party verified through Underwriters Laboratories for max operating temperature of 250° F (120° C) and continuous operating pressure of 1740 psi (120 Bar).
Installation	Streamline® XHP™ copper material was developed for use with high pressure refrigerants. Compared to conventional pure copper Cu-DHP (99.9% Cu; UNS C12200), Streamline® XHP™ material is a CuFe2P alloy (2% iron; UNS C19400). This material's wettability is comparable to that of Cu-DHP. Streamline® XHP™ is not subject to any restrictions for the selection of brazing alloy. Commonly used brazing filler metal types such as BCup Alloy (may contain 0%-30% Silver – Ag) or Bag Alloy (may contain anywhere between 24% and 93% Silver – Ag) can be used. The brazing alloy chosen must be clarified with the brazing alloy supplier for each specific application. The selection of brazing alloy may depend on a few factors: applicable codes, OEM specifications, vibration, and operating temperatures.

¹ Streamline® XHP™ Copper Fittings shall be made from material in compliance with UNS C19400 grade of copper.