

TEZ 8™

TWO STAGE VACUUM PUMP CFM

8cfm Vacuum Pump

For HVAC/R Service Work

- Field-proven to outperform larger, belt-driven pumps **by hours or days**
- 1/2" and dual 3/8" inputs to allow for maximum input flow - up to **32 times the flow** of single-input pumps
- Two-stage exhaust system vents moisture without breaking the vacuum - no gas ballast needed
- Easily starts up in extreme ambient conditions - **even as low as -40°F/C**
- Adjustable Multi-Port Input Tree for simultaneous connections and unparallelled performance
- Low maintenance, easy to service



Remote Exhaust w/"Garden Hose" Fitting

Easy-to-Clean Debris Filter Screen

Clear Monitor Tube for Easy Debris Monitoring

Wide, Low Stance Prevents Accidental Tipping


Adjustable Multi-Port Input for 1/4", 3/8" and 1/2" Hoses

Weighs Just 28 Lbs.

Rated To 20 Microns



Easy to install Pump Rebuild Kit - pump assembly can be rebuilt with simple tools

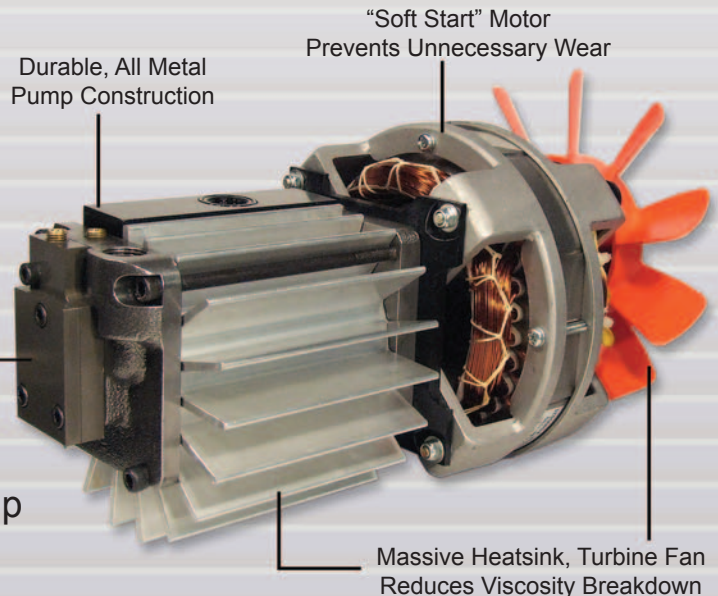

Durable, All Metal Pump Construction

"Soft Start" Motor Prevents Unnecessary Wear

Simple, "No Torque" Pump Assembly for Easy Serviceability

Massive Heatsink, Turbine Fan Reduces Viscosity Breakdown

Intake Monitoring & Control

- Debris Catch Tube traps debris with easy-to-clean mesh Filter Screen
- Automatic Positive Pressure Relief - Eliminates accidental oil showers



- Oil Separator - Reduces pump contamination
- Clearly Visible - Enhanced intake monitoring allows for better control of the evacuation process

- High-speed turbine fan and massive aluminum heatsink keeps the pump and oil cooler, reducing oil viscosity breakdown
- Advanced “anti-suckback” eliminates check valves and other flow restrictions
- Lightweight composite resin case for rugged durability and reduced weight
- “Soft start” motor for reliable startup in all conditions, preventing unnecessary wear

Part #: TEZ8

Product Specifications		
Length	14.25 in.	362 mm
Height	10.30 in.	262 mm
Width	9.40 in.	239 mm
Weight	28 Lbs.	12.7 Kgs.
Power	115 VAC, 60 Hz, 10 Amps Int'l: 230 VAC, 50 Hz, 5 Amps Japan: 100 VAC, 60 Hz, 10 Amps	
Free Air Displacement	8cfm (227 l/min)	
Ultimate Vacuum	<20 Microns	
Inlet Port Fittings	1/4", 3/8" (x2), 1/2" Flare	

TEZOM™

5-Second Oil Change™



Hermetically-Sealed TEZOM™ Cartridge
Clean, Dry Oil for Rapid, Deep Evacuation

- **5-Second Oil Change™** - Change the oil “on the fly” without breaking the vacuum
- Oil Cartridge System **prevents** hidden sludge buildup in the pump



Field Repair Parts & Accessories	
KTCAP4	4-Port Cap Set for Tez8
KTT841	Tez8 Input O-Ring Kits
KTT855	TEZOM Cartridge Seal Set
KTT881	Tez8 Pump Rebuild Kit
PL7903	Tez8 Oil Port Cover
PL7922	Tez8 Debris Monitor/Catch Tube

For More Information Visit:
www.AppionInc.com