

Flexible Hose - Foil Duct

Builder's Best, Inc.
 201 Broiles Drive • Jacksonville, TX 75766
 1-8-U VENT SAFE (1-888-368-7233) or 903-586-8283
 FAX 1-800-259-VENT (1-800-259-8368) or 903-586-9370
 Internet: www.buildersbest.com



Description


- *Steel wire support*
- *Designed for low to medium operating pressures in HVAC systems. (Not for use to vent appliances for cooking, heating and clothes drying unless approved and recommended by the appliance manufacturer.)*
 - *Class 1 Air Connector label meeting NFPA (90A and 90B).*
 - *Tear and puncture resistant*
- *Encapsulated wire helix does not unravel when cut to length*
 - *Air tight construction and smooth inner core*

Product Specs

- Triple ply design of metalized polyester, aluminum foil and polyester laminate
- 3" and 4" in 5', 8', 25' and 50' lengths
- 5", 6", 7", 8", 9", 10" and 12" diameters in 25' lengths
- 3" diameter has 3/4" pitch
- 4-12" diameter has 1" pitch



Airflow

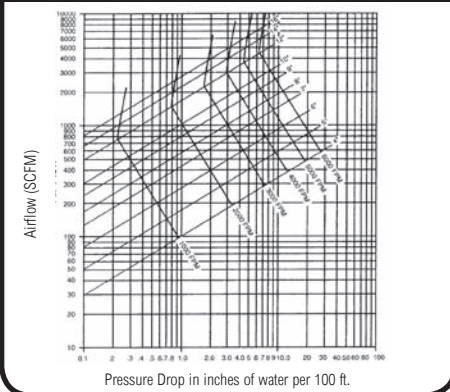

Performance Data

Rated Positive Pressure: 10" w.g. per UL® 181 (determined in straight lengths at ambient temperatures).
Recommended Operating Pressures: (determined in a 90° bend at elevated temperatures according to ADC FD 72-R1 Test Code):
 6" w.g. positive - all diameters
 3/4" w.g. negative - all diameters

Temperature Range:
 -20°F external to +180°F internal

Flame Spread Less than 25
 Smoke Developed Less than 50

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)
 Air connectors shall not be installed in lengths greater than 14 feet for any given run.

Warranty

WARRANTY EXCLUSION AND DISCLAIMER Seller specifically excludes, and hereby disclaims any express representation or express warranty of any kind with respect to the goods ordered hereunder. All implied warranties, including without limitation merchantability or fitness for a particular purpose or arising from a course of dealing or usage or trade shall expire and cease 45 days after date of delivery. Seller shall not be liable to buyer or any third party for any special, secondary, incidental, or consequential damages however arising. Nothing in this provision shall invalidate or restrict any right or remedy otherwise available under state or federal law. Materials and specifications subject to change without notice

MADE IN USA • 9/14//04 • ©Builder's Best, Inc

Labels

UL® 181 Class 1 air connector label

