W

Fire Damper - Model 75A

Dampers are undersized 1/4" from the order width and

Blades are in the air stream

For use in STATIC systems


Standard construction is galvanized steel Stainless steel construction is available


•

•

height

Horizontal and Vertical U.L. Classified 1 1/2 Hour Rating

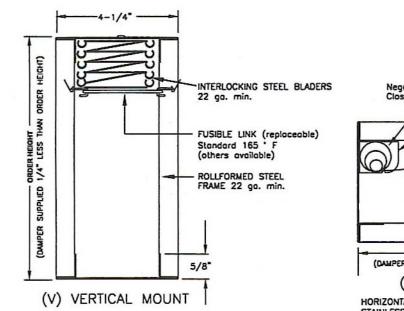



Single Section Size Availability Job Name Vertical Horizontal Location 4" 4" 4" 4" Architect Minimum 60" 60" 60" 60" Maximum Engineer 120" 120" 120" 120" **Multiple Section** Contractor



UNDERWRITERS LABORATORIES (UL555) CLASSIFIED FIRE DAMPERS. FIRE RESISTENCE RATED 1-1/2 HOUR. FOR USE IN UL CLASSIFIED BUILDING MATERIALS RATED 2 HOURS OR LESS.







1502 Industrial Drive, Unit #2 Monongahela, PA 15063