

Press On Conical

CONTACT

Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317


www.clward.com

Detail

- Galvanized Steel (ASTM A653 and A924)
- G-60 Galvanized Coating (ASTM A653 and ASTM 90)
- Available in Specialty Metals:
 - Aluminum (ASTM B209 Alloy 3003 Temper H14)
 - 304 Stainless Steel (ASTM A480 2B Finish)
- Pressure Rating: Designed per SMACNA Third Edition 2005 Section 4.8 Figure 4-6 Brand Connections
- Tested to meet SMACNA Leakage Class 3 requirements (Test performed on fittings with no damper)
- Seams and colatchsealed with zero VOC integral sealant
- Dimensional Tolerance: $\pm 1/4"$
- Available with $3/8"$ continuous rod and hardware



Profile

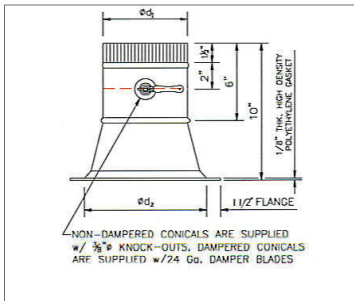

| Conical | Option | Press On | Riveted | Diameter | Material | Gauge | Option | Option |
|---------|--|----------|---------|-----------|-------------------------------------|-------------------|---|---------------------------|
| CN | S15, S2 = 1.5" or 2" Stand off option | P | R | 4" to 20" | GA - Galv. S4 - SS304 AL - AL | 26,24 26 32 | DS= Damper DCS= 3/8" Rod and Damper | 38 = Rossi Hardware |

Item Code Example: CNS2PR6GA26DS = Press On Conical, 2" Stand-off, 6", Galv., 26 ga, w/Damper

Packaging

| Product Availability | | | | | |
|----------------------|--------------------|--------|----------|------|---------------|
| Size ød1 | Gauge Availability | | Quantity | | Dimension ød2 |
| | 26 Ga. | 24 Ga. | Carton | Skid | |
| 4" | YES | - | 20 | 200 | 5.75" |
| 5" | YES | YES | 20 | 200 | 6.75" |
| 6" | YES | YES | 20 | 160 | 7.75" |
| 7" | YES | YES | 8 | 112 | 8.75" |
| 8" | YES | YES | 8 | 112 | 9.75" |
| 9" | YES | YES | 8 | 112 | 10.75" |
| 10" | YES | YES | 8 | 72 | 11.75" |
| 12" | YES | YES | 5 | 40 | 13.75" |
| 14" | YES | YES | 5 | 40 | 15.75" |
| 16" | YES | YES | 5 | 40 | 17.75" |
| 18" | YES | YES | 3 | 36 | 19.75" |
| 20" | YES | YES | | | 21.75" |

Dampened fittings are available with 1.5" or 2" Stand-Off.