

|           |  |
|-----------|--|
| Job Name: |  |
| Tag#      |  |



|                                  |                       |
|----------------------------------|-----------------------|
| <b>Submittal Data Sheet</b>      | <b>CTXG18QVJUW(S)</b> |
| 1.5-Ton Wall Mounted Indoor Unit |                       |



Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

| Indoor Specifications         |                            |     |                   |     |
|-------------------------------|----------------------------|-----|-------------------|-----|
|                               | Cooling                    |     | Heating           |     |
|                               | H                          | M   | H                 | M   |
| Airflow Rate (cfm)            | 364                        | 286 | 438               | 350 |
|                               | L                          | SL  | L                 | SL  |
|                               | 233                        | 219 | 265               | 212 |
| Sound (dBA)<br>H / M / L / SL | 46 / 40 / 35 / 32          |     | 47 / 41 / 35 / 32 |     |
| Dimensions (H x W x D) (in)   | 11-15/16 x 39-5/16 x 8-3/8 |     |                   |     |
| Weight (Lbs)                  | 27                         |     |                   |     |
| Nominal Capacity (Btu/hr)     | 18,000                     |     |                   |     |

\*See Outdoor Unit for Rated Capacities

| Piping      |       |
|-------------|-------|
| Liquid (in) | 1/4   |
| Gas (in)    | 1/2   |
| Drain (in)  | 11/16 |

| Electrical                    | *208/230V |          |
|-------------------------------|-----------|----------|
|                               | Cooling   | Heating  |
| Running Current (Rated) (A)   | .14/.14*  | .21/.21* |
| Power Consumption (Rated) (W) | 28/28*    | 42/42*   |

| Color Selection |              |
|-----------------|--------------|
| White _____     | Silver _____ |

## Optional Accessories

| Included | Part Number  | Description   |
|----------|--------------|---|
|          | BRP072A43    | Wireless Interface Adapter (S21 Adapter Included)                             |
|          | BRC944B2-A08 | Wired Remote Controller Kit (Includes BRC944B2 & BRCW901A08)                  |
|          | BRCW901A03   | Wired Remote Controller Cable - 10 ft (For BRC944B2)                          |
|          | BRCW901A08   | Wired Remote Controller Cable - 25 ft (For BRC944B2)                          |
|          | KRP928BB2S   | Interface adaptor for DIII-NET  |
|          | DACA-CP1-1   | Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)      |
|          | DACA-CP4-1   | External Condensate Pump  |
|          | KAF970A46    | Air-purifying filter with photocatalytic deodorizing function (without frame) |


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

# CTXG18QVJUW(S) Dimensional Data



NOTE) 1. THE MARK (→) SHOWS PIPING DIRECTION.

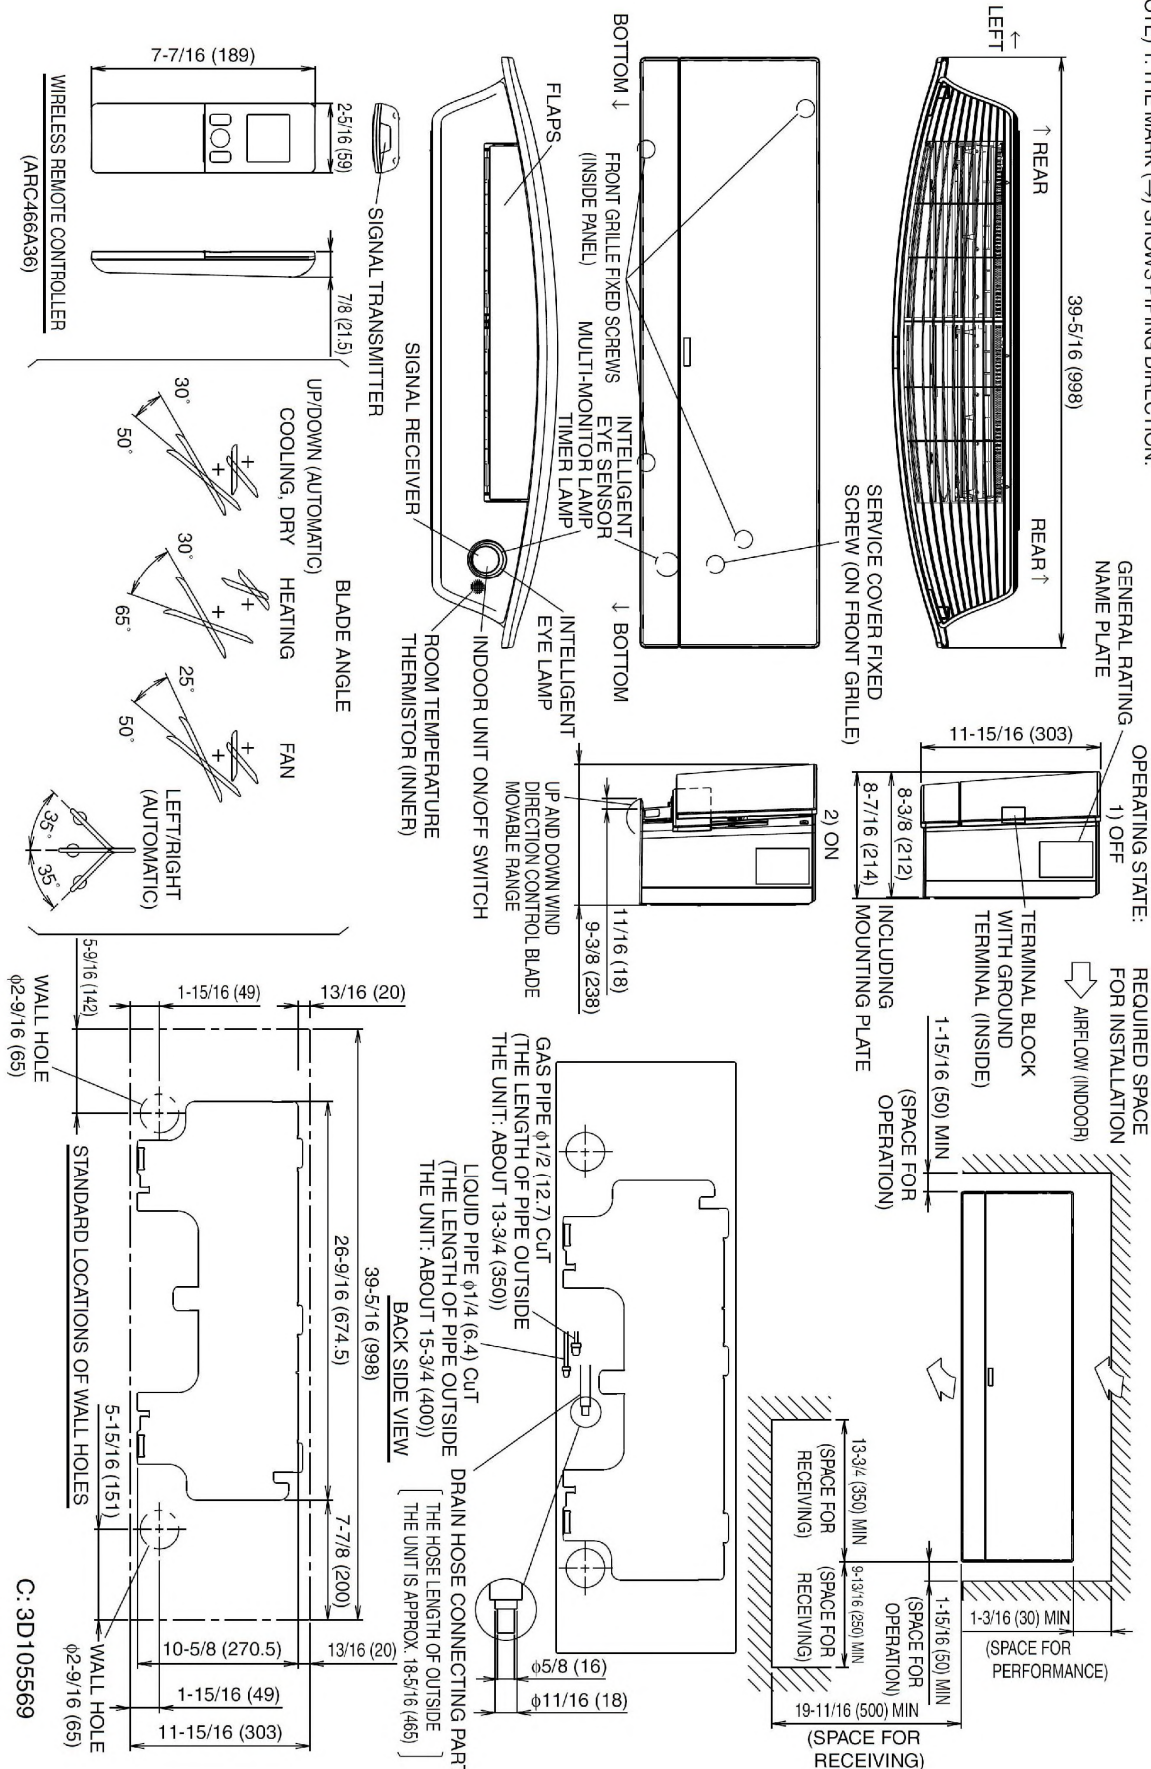

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)