



ENERGY-INTELLIGENT™ TECHNOLOGY
HEATING AND COOLING SYSTEMS





TABLE OF CONTENTS

	Air Conditioners	Efficiency Rating	Page
PACKAGED UNITS	DCC (3 to 6 Tons)	13 SEER	4
	DCC (7½ to 12½ Tons)	Up to 11.3 EER	5
	DCC (15 to 25 Tons)	Up to 11.0 EER	6
	Heat Pumps		
	DCH (3 to 6 Tons)	13 SEER	7
	DCH (7½ to 12½ Tons)	Up to 11.5 EER	8
	Gas/Electric Units		
	DCG (3 to 6 Tons)	13 SEER/80% AFUE	9
	DCG (7½ to 12½ Tons)	Up to 11.3 EER/80% AFUE	11
	DCG (15 to 25 Tons)	Up to 10.8 EER/80% AFUE	12
	Single-Phase Units		
	DTC/DTH/DTG (3 to 5 Tons)	Up to 15.5 SEER	13
	M Series		
DP13CM	13 SEER	14	
DP13HM	13 SEER	15	
DP13GM	13 SEER/80% AFUE	16	
SPLIT SYSTEMS	Air Conditioners		
	DX13SA (3 to 5 Tons)	13 SEER	18
	DX11SA (7½ & 10 Tons)	11.2 EER	19
	Heat Pumps		
	DZ13SA (3 to 5 Tons)	13 SEER	20
DZ11SA (7½ & 10 Tons)	11 EER	21	
ACCESSORIES	Air Handlers		
	DAR		22
	DAT		22
	DCC/DCH/DCG/DTC/DTH Packaged Units		24
	DP13CM/DP13HM/DP13GM Packaged Units		28
	Split System Air Conditioners & Heat Pumps		30
	DTC/DTH/DCC/DCH Heat Kit Match-Ups — 3 to 6 Tons		31
	DCC/DCH Heat Kit Match-Ups — 7½ to 12½ Tons		33
	DCC Heat Kit Match-Ups — 15 to 25 Tons		35



PACKAGED UNITS



DCC — Three-Phase Packaged Air Conditioners (3 to 6 Tons)



The Daikin brand DCC Commercial Packaged Air Conditioners feature a high-efficiency scroll compressor, convertible airflow orientation, and easy access for servicing. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressors
- Copper tube/aluminum fin coils
- 24-volt terminal strip
- High-capacity, steel-cased filter drier
- Convertible airflow orientation
- Bottom utility entry
- AHRI Certified; ETL Listed
- Built-in filter rack with standard 2" filters
- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Full perimeter rail; Curb fit

Model	Cooling Capacity		SEER/ EER	Voltage- Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	BTU/h	CFM				W"	D"	H"		
DCC036***3D***	34,600	1,200	13 / 11.0	208/230-3	10, 15	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	525
DCC036***3B***	34,600	1,200	13 / 11.0	208/230-3	10, 15	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	525
DCC036***4B***	34,600	1,200	13 / 11.0	460-3	10, 15	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	525
DCC036***7B***	34,600	1,200	13 / 11.0	575-3	10, 15	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	525
DCC048***3D***	45,500	1,600	13.0 / 11.3	208/230-3	10, 15, 18	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	560
DCC048***3B***	45,500	1,600	13.0 / 11.3	208/230-3	10, 15, 18	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	560
DCC048***4B***	45,500	1,600	13.0 / 11.3	460-3	10, 15, 18	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	560
DCC048***7B***	45,500	1,600	13.0 / 11.3	575-3	10, 15, 18	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	560
DCC060***3D***A*	58,000	2,000	13 / 11.1	208/230-3	10, 15, 20	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	595
DCC060***3B***A*	58,000	2,000	13 / 11.1	208/230-3	10, 15, 20	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	595
DCC060***4B***A*	58,000	2,000	13 / 11.1	460-3	10, 15, 20	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	595
DCC060***7B***A*	58,000	2,000	13 / 11.1	575-3	10, 15, 20, 25	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	595
DCC072***3B***A*	71,000	2,350	--/ 11.2	208/230-3	10, 15, 20, 25	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	665
DCC072***4B***A*	71,000	2,350	--/ 11.2	460-3	10, 15, 20, 25	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	665
DCC072***7B***A*	71,000	2,350	--/ 11.2	575-3	10, 15, 20, 25	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	665

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DCC — Three-Phase Packaged Air Conditioners (7½ to 12½ Tons)



The Daikin brand DCC Commercial Packaged Air Conditioners feature the chlorine-free refrigerant R-410A. Other features include a high-efficiency scroll compressor and easy access for servicing. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



PACKAGED UNITS

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressor
- Copper tube/aluminum fin coils
- Contactor with lugs
- High-capacity, steel-cased filter drier
- Two-stage cooling
- 24-volt terminal strip
- Convertible airflow orientation
- Easy to service
- Built-in filter rack with standard 2" filters
- AHRI Certified; ETL Listed
- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Full perimeter rail; Curb fit

Model	Cooling Capacity		EER/IEER	Voltage-Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	BTU/h	CFM				W"	D"	H"		
DCC090***3B***A*	88,000	3,000	11.3 / 11.5	208/230-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	82	1085
DCC090***3V***A*	88,000	3,000	11.3 / 13.0	208/230-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	82	1085
DCC090***4B***A*	88,000	3,000	11.3 / 11.5	460-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	82	1085
DCC090***4V***A*	88,000	3,000	11.3 / 13.0	460-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	82	1085
DCC090***7B***A*	88,000	3,000	11.3 / 11.5	575-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	82	1085
DCC090***7V***A*	88,000	3,000	11.3 / 13.0	575-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	82	1085
DCC102***3B***A*	102,000	3,200	11.3 / 11.4	208/230-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC102***3V***A*	102,000	3,200	11.3/13.4	208/230-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC102***4B***A*	102,000	3,200	11.3 / 11.4	460-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC102***4V***A*	102,000	3,200	11.3/13.4	460-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC102***7B***A*	102,000	3,200	11.3 / 11.4	575-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC102***7V***A*	102,000	3,200	11.3/13.4	575-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC120***3B***A*	116,000	3,500	11.3/11.5	208/230-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC120***3V***A*	116,000	3,500	11.3 / 13.0	208/230-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC120***4B***A*	116,000	3,500	11.3/11.5	460-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC120***4V***A*	116,000	3,500	11.3 / 13.0	460-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC120***7B***A*	116,000	3,500	11.3/11.5	575-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC120***7V***A*	116,000	3,500	11.3 / 13.0	575-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	52 ³ / ₈	83	1125
DCC150***3B***A*	144,000	3,900	11.0 / 11.2	208/230-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	58 ³ / ₈	83	1250
DCC150***3V***A*	144,000	3,900	11.0 / 12.2	208/230-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	58 ³ / ₈	83	1250
DCC150***4B***A*	144,000	3,900	11.0 / 11.2	460-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	58 ³ / ₈	83	1250
DCC150***4V***A*	144,000	3,900	11.0 / 12.2	460-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	58 ³ / ₈	83	1250
DCC150***7B***A*	144,000	3,900	11.0 / 11.2	575-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	58 ³ / ₈	83	1250
DCC150***7V***A*	144,000	3,900	11.0 / 12.2	575-3	16,30,45	100 ⁵ / ₆₄	61 ³ / ₄	58 ³ / ₈	83	1250

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DCC — Three-Phase Packaged Air Conditioners (15 to 25 Tons)



The Daikin brand DCC Commercial Packaged Air Conditioners feature the chlorine-free refrigerant R-410A. Other features include a high-efficiency scroll compressor and easy access for servicing. These units are housed in a heavy-gauge, galvanized steel cabinet with UV-resistant powder-paint finish.



**5 YEAR
PARTS
LIMITED
WARRANTY**

* Complete warranty details available from your local dealer or at www.daikincomfort.com.

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressors
- Copper tube/aluminum fin coils
- Contactor with lugs
- High-capacity, steel-cased filter drier
- High -and low- pressure switches
- Aluminum micro-channel indoor coil on 25-ton units
- 24-volt terminal strip
- Easy to service
- 25-ton unit contains two outdoor fans
- Built-in filter rack with standard 2" filters (convertible to 4" filters)
- AHRI Certified; ETL Listed
- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Full perimeter rail

Model	Cooling Capacity		EER / IEER	Voltage-Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	BTU/h	CFM				W"	D"	H"		
DCC180***3B***A*	180,000	6,000	11 / 11.2	208-230/3	30, 45, 60	133½	88¾/32	50¾	88	2080
DCC180***3V***A*	180,000	6,000	11 / 12.8	208-230/3	30, 45, 60	133½	88¾/32	50¾	88	2080
DCC180***4B***A*	180,000	6,000	11 / 11.2	460/3	30, 45, 60	133½	88¾/32	50¾	88	2080
DCC180***4V***A*	180,000	6,000	11 / 12.8	460/3	30, 45, 60	133½	88¾/32	50¾	88	2080
DCC180***7B***A*	180,000	6,000	11 / 11.2	575/3	30, 45, 60	133½	88¾/32	50¾	88	2080
DCC180***7V***A*	180,000	6,000	11 / 12.8	575/3	30, 45, 60	133½	88¾/32	50¾	88	2080
DCC240***3B***A*	240,000	7,000	10.0 / 10.1	208-230/3	30, 45, 60, 75	133½	88¾/32	50¾	88	2202
DCC240***3V***A*	240,000	7,000	10.0 / 11.5	208-230/3	30, 45, 60, 75	133½	88¾/32	50¾	88	2202
DCC240***4B***A*	240,000	7,000	10.0 / 10.1	460/3	30, 45, 60, 75	133½	88¾/32	50¾	88	2202
DCC240***4V***A*	240,000	7,000	10.0 / 11.5	460/3	30, 45, 60, 75	133½	88¾/32	50¾	88	2202
DCC240***7B***A*	240,000	7,000	10.0 / 10.1	575/3	30, 45, 60, 75	133½	88¾/32	50¾	88	2202
DCC240***7V***A*	240,000	7,000	10.0 / 11.5	575/3	30, 45, 60, 75	133½	88¾/32	50¾	88	2202

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.

Model	Cooling Capacity		EER / IEER	Voltage-Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	BTU/h	CFM				W"	D"	H"		
DCC300***3B***A*	290,000	8,200	10.2 / 11.2	208-230/3	30, 45, 60, 75	133½	88¾/32	53¾/2	92	2377
DCC300***3V***A*	290,000	8,200	10.2 / 11.8	208-230/3	30, 45, 60, 75	133½	88¾/32	53¾/2	92	2387
DCC300***4B***A*	290,000	8,200	10.2 / 11.2	460/3	30, 45, 60, 75	133½	88¾/32	53¾/2	92	2377
DCC300***4V***A*	290,000	8,200	10.2 / 11.8	460/3	30, 45, 60, 75	133½	88¾/32	53¾/2	92	2387
DCC300***7B***A*	290,000	8,200	10.2 / 11.2	575/3	30, 45, 60, 75	133½	88¾/32	53¾/2	92	2377
DCC300***7V***A*	290,000	8,200	10.2 / 11.8	575/3	30, 45, 60, 75	133½	88¾/32	53¾/2	92	2387

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DCH — Three-Phase Packaged Heat Pumps (3 to 6 Tons)



* Complete warranty details available from your local dealer or at www.daikincomfort.com.

The Daikin brand DCH Commercial Packaged Heat Pumps feature the chlorine-free refrigerant R-410A. Other features include high-efficiency scroll compressors and easy access for servicing. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



PACKAGED UNITS

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressor
- Copper tube/aluminum fin coils
- Contactor with lugs
- AHRI Certified; ETL Listed
- High-capacity, steel-cased filter drier
- Bottom utility entry
- 24-volt terminal strip
- Convertible airflow orientation
- Easy to service
- Built-in filter rack with standard 2" filters
- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Full perimeter rail; Curb fit

Model	Nominal Capacities ¹			SEER/ EER	Voltage- Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	CFM	Heating				W"	D"	H"		
DCH036***3D***	35,600	1,200	34,600	13 / 11	208/230-3	10, 15	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	605
DCH036***3B***	35,600	1,200	34,600	13 / 11	208/230-3	10, 15	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	605
DCH036***4B***	35,600	1,200	34,600	13 / 11	460-3	10, 15	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	605
DCH036***7B***	35,600	1,200	34,600	13 / 11	575-3	10, 15	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	605
DCH048***3D***	46,000	1,600	45,000	13 / 11.3	208/230-3	10, 15, 18	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	610
DCH048***3B***	46,000	1,600	45,000	13 / 11.3	208/230-3	10, 15, 18	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	610
DCH048***4B***	46,000	1,600	45,000	13 / 11.3	460-3	10, 15, 18	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	610
DCH048***7B***	46,000	1,600	45,000	13 / 11.3	575-3	10, 15, 18	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	610
DCH060***3D***	59,500	1,950	57,000	13 / 11	208/230-3	10, 15, 20	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	615
DCH060***3B***	59,500	1,950	57,000	13 / 11	208/230-3	10, 15, 20	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	615
DCH060***4B***	59,500	1,950	57,000	13 / 11	460-3	10, 15, 20	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	615
DCH060***7B***	59,500	1,950	57,000	13 / 11	575-3	10, 15, 20	74 ⁵ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	615

Model	Nominal Capacities ¹			EER/ IEER	Voltage- Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	CFM	Heating				W"	D"	H"		
DCH072***3B***	71,000	2,400	70,000	11.1 / 11.2	208/230-3	10, 15, 20, 25	74 ⁵ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	675
DCH072***4B***	71,000	2,400	70,000	11.1 / 11.2	460-3	10, 15, 20, 25	74 ⁵ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	675
DCH072***7B***	71,000	2,400	70,000	11.1 / 11.2	575-3	10, 15, 20, 25	74 ⁵ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	675

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DCH — Three-Phase Packaged Heat Pumps (7½ to 12½ Tons)



The Daikin brand DCH Commercial Packaged Heat Pumps feature high-efficiency scroll compressors, two-stage cooling, and easy access for servicing. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



* Complete warranty details available from your local dealer or at www.daikincomfort.com.



DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressors
- Two-stage cooling
- Copper tube/aluminum fin coils
- Contactor with lugs
- High-capacity, steel-cased filter drier
- 24-volt terminal strip
- Convertible airflow orientation
- Easy to service
- Built-in filter rack with standard 2" filters
- AHRI Certified; ETL Listed
- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Full perimeter rail; Curb fit

Model	Nominal Capacities ¹			EER/IEER	Voltage-Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	CFM	Heating				W"	D"	H"		
DCH090***3B***A*	90,000	3,000	90,000	11.5 / 11.5	208/230-3	16,30,45	100% ₆₄	61%	52%	83	1175
DCH090***3V***A*	90,000	3,000	90,000	11.5 / 12.8	208/230-3	16,30,45	100% ₆₄	61%	52%	83	1175
DCH090***4B***A*	90,000	3,000	90,000	11.5 / 11.5	460-3	16,30,45	100% ₆₄	61%	52%	83	1175
DCH090***4V***A*	90,000	3,000	90,000	11.5 / 12.8	460-3	16,30,45	100% ₆₄	61%	52%	83	1175
DCH090***7B***A*	90,000	3,000	90,000	11.5 / 11.5	575-3	16,30,45	100% ₆₄	61%	52%	83	1175
DCH090***7V***A*	90,000	3,000	90,000	11.5 / 12.8	575-3	16,30,45	100% ₆₄	61%	52%	83	1175
DCH102***3B***A*	102,000	3,400	102,000	11.1 / 11.2	208/230-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH102***3V***A*	102,000	3,400	102,000	11.1/13.0	208/230-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH102***4B***A*	102,000	3,400	102,000	11.1 / 11.2	460-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH102***4V***A*	102,000	3,400	102,000	11.1/13.0	460-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH102***7B***A*	102,000	3,400	102,000	11.1 / 11.2	575-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH102***7V***A*	102,000	3,400	102,000	11.1/13.0	575-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH120***3B***A*	115,000	3,500	116,000	11.1/11.5	208/230-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH120***3V***A*	113,000	3,500	116,000	11.1 / 12.6	208/230-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH120***4B***A*	115,000	3,500	116,000	11.1 / 11.5	460-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH120***4V***A*	113,000	3,500	116,000	11.1 / 12.6	460-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH120***7B***A*	115,000	3,500	116,000	11.1 / 11.5	575-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH120***7V***A*	113,000	3,500	116,000	11.1 / 12.6	575-3	16,30,45	100% ₆₄	61%	52%	83	1310
DCH150***3B***A*	140,000	5,000	142,000	10.6 / 10.7	208/230-3	16,30,45	100% ₆₄	61%	58%	83	1350
DCH150***3V***A*	140,000	5,000	142,000	10.6 / 11.8	208/230-3	16,30,45	100% ₆₄	61%	58%	83	1350
DCH150***4B***A*	140,000	5,000	142,000	10.6 / 10.7	460-3	16,30,45	100% ₆₄	61%	58%	83	1350
DCH150***4V***A*	140,000	5,000	142,000	10.6 / 11.8	460-3	16,30,45	100% ₆₄	61%	58%	83	1350
DCH150***7B***A*	140,000	5,000	142,000	10.6 / 10.7	575-3	16,30,45	100% ₆₄	61%	58%	83	1350
DCH150***7V***A*	140,000	5,000	142,000	10.6 / 11.8	575-3	16,30,45	100% ₆₄	61%	58%	83	1350


¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DCG — Three-Phase Packaged Gas/Electric (3 to 6 Tons)



The Daikin brand DCG Commercial Packaged Gas/Electric Units feature the chlorine-free refrigerant R-410A. Other features include our patented dual-diameter tubular heat exchanger and a high-efficiency scroll compressor. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.

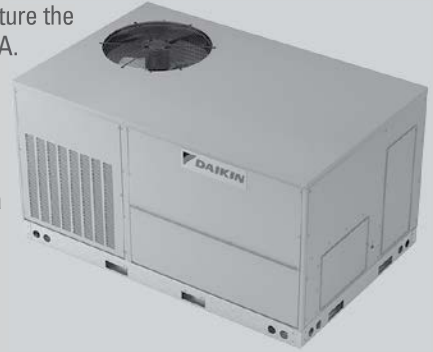

PACKAGED UNITS

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- Alumined-steel tubular heat exchanger; stainless-steel heat exchanger optional
- High-efficiency scroll compressor
- Copper tube/aluminum fin coils
- Contactor with lugs
- High-capacity, steel-cased filter drier
- 24-volt terminal strip
- Easy to service and Convertible
- Built-in filter rack with standard 2" filters
- Bottom utility entry
- AHRI Certified; ETL Listed
- Complies with California Low NOx emissions standards
- Full perimeter rail; Curb fit

Model	Nominal Capacities ¹			SEER/EER	Voltage-Phase	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	Cooling CFM	Heating			W"	D"	H"		
DCG0360453D***A*	34,600	1,200	46,000	13 / 11	208/230-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	550
DCG0360453B***A*	34,600	1,200	46,000	13 / 11	208/230-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	550
DCG0360454B***A*	34,600	1,200	46,000	13 / 11	460-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	550
DCG0360903D***A*	34,600	1,200	92,000	13 / 11	208/230-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	560
DCG0360903B***A*	34,600	1,200	92,000	13 / 11	208/230-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	560
DCG0360904B***A*	34,600	1,200	92,000	13 / 11	460-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	560
DCG0360907B***A*	34,600	1,200	92,000	13 / 11	575-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	560
DCG0480903D***A*	45,500	1,600	92,000	13 / 11.3	208/230-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	600
DCG0480903B***A*	45,500	1,600	92,000	13 / 11.3	208/230-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	600
DCG0480904B***A*	45,500	1,600	92,000	13 / 11.3	460-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	600
DCG0481153D***A*	45,500	1,600	115,000	13 / 11.3	208/230-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	610
DCG0481153B***A*	45,500	1,600	115,000	13 / 11.3	208/230-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	610
DCG0481154B***A*	45,500	1,600	115,000	13 / 11.3	460-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	610
DCG0481157B***A*	45,500	1,600	115,000	13 / 11.3	575-3	74 $\frac{1}{16}$	48 $\frac{5}{16}$	38 $\frac{13}{16}$	78	610

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DCG — Three-Phase Packaged Gas/Electric (CONT.) (3 to 6 Tons)



The Daikin brand DCG Commercial Packaged Gas/Electric Units feature the chlorine-free refrigerant R-410A. Other features include our patented dual-diameter tubular heat exchanger and a high-efficiency scroll compressor. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



**20 YEAR
HEAT
EXCHANGER
LIMITED
WARRANTY**

**5 YEAR
PARTS
LIMITED
WARRANTY**

* Complete warranty details available from your local dealer or at www.daikincomfort.com.

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressors
- Copper tube/aluminum fin coils
- Contactor with lugs
- High-capacity, steel-cased filter drier
- Bottom utility entry
- 24-volt terminal strip
- Convertible airflow orientation
- Easy to service
- Built-in filter rack with standard 2" filters
- AHRI Certified; ETL Listed
- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Full perimeter rail; Curb fit

Model	Nominal Capacities ¹			SEER/ EER	Voltage- Phase	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	Cooling CFM	Heating			W"	D"	H"		
DCG0600903D***A*	58,000	1,900	92,000	13 / 11.1	208/230-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	635
DCG0600903B***A*	58,000	1,900	92,000	13 / 11.1	208/230-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	635
DCG0600904B***A*	58,000	1,900	92,000	13 / 11.1	575-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	635
DCG0601403D***A*	58,000	1,900	138,000	13 / 11.1	208/230-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	645
DCG0601403B***A*	58,000	1,900	138,000	13 / 11.1	208/230-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	645
DCG0601404B***A*	58,000	1,900	138,000	13 / 11.1	460-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	645
DCG0601407B***A*	58,500	1,900	138,000	13 / 11.0	575-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	655

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.

Model	Nominal Capacities ¹			EER/ IEER	Voltage- Phase	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	Cooling CFM	Heating			W"	D"	H"		
DCG0721403B***A*	71,000	2,350	138,000	11.0 / 11.2	208/230-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	715
DCG0721404B***A*	71,000	2,350	138,000	11.0 / 11.2	460-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	715
DCG0721407B***A*	71,000	2,350	138,000	11.0 / 11.2	575-3	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	715

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DCG — Three-Phase Packaged Gas/Electric (7½ to 12½ Tons)



The Daikin brand DCG Commercial Packaged Gas/Electric Units feature the chlorine-free refrigerant R-410A. Other features include our patented dual-diameter tubular heat exchanger and a high-efficiency scroll compressor. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



PACKAGED UNITS

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- Alumined-steel tubular heat exchanger; stainless-steel heat exchanger optional
- High-efficiency scroll compressors
- Two-stage cooling
- Copper tube/aluminum fin coils
- Contactor with lugs
- High-capacity, steel-cased filter drier
- 24-volt terminal strip
- Easy to service and Convertible
- Built-in filter rack with standard 2" filters
- AHRI Certified; ETL Listed
- Complies with California Low NOx emissions standards
- Full perimeter rail; Curb fit

Model	Nominal Capacities ¹			EER/IEER	Voltage-Phase	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	CFM	Heating			W"	D"	H"		
DCG0902103B***A*	88,000	3,000	210,000	11.3 / 11.5	208/230-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	82	1175
DCG0902103V***A*	88,000	3,000	210,000	11.3 / 13.0	208/230-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	82	1175
DCG0902104B***A*	88,000	3,000	210,000	11.3 / 11.5	460-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	82	1175
DCG0902104V***A*	88,000	3,000	210,000	11.3 / 13.0	460-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	82	1175
DCG0902107B***A*	88,000	3,000	210,000	11.3 / 11.5	575-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	82	1175
DCG0902107V***A*	88,000	3,000	210,000	11.3 / 13.0	575-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	82	1175
DCG1022103B***A*	102,000	3,200	210,000	11.3 / 11.2	208/230-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1022103V***A*	102,000	3,200	210,000	11.3/13.4	208/230-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1022104B***A*	102,000	3,200	210,000	11.3 / 11.2	460-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1022104V***A*	102,000	3,200	210,000	11.3/13.4	460-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1022107B***A*	102,000	3,200	210,000	11.3 / 11.2	575-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1022107V***A*	102,000	3,200	210,000	11.3/13.4	575-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1202103B***A*	116,000	3,500	210,000	11.3 / 11.5	208/230-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1202103V***A*	116,000	3,500	210,000	11.3 / 12.8	208/230-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1202104B***A*	116,000	3,500	210,000	11.3 / 11.5	460-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1202104V***A*	116,000	3,500	210,000	11.3 / 12.8	460-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1202107B***A*	116,000	3,500	210,000	11.3 / 11.5	575-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1202107V***A*	116,000	3,500	210,000	11.3 / 12.8	575-3	100 ⁵ / ₆₄	61 ¹ / ₂	52 ¹ / ₂	83	1215
DCG1502103B***A*	144,000	3,900	210,000	10.8 / 11.0	208/230-3	100 ⁵ / ₆₄	61 ¹ / ₂	58 ¹ / ₂	83	1340
DCG1502103V***A*	144,000	3,900	210,000	10.8 / 12.0	208/230-3	100 ⁵ / ₆₄	61 ¹ / ₂	58 ¹ / ₂	83	1340
DCG1502104B***A*	144,000	3,900	210,000	10.8 / 11.0	460-3	100 ⁵ / ₆₄	61 ¹ / ₂	58 ¹ / ₂	83	1340
DCG1502104V***A*	144,000	3,900	210,000	10.8 / 12.0	460-3	100 ⁵ / ₆₄	61 ¹ / ₂	58 ¹ / ₂	83	1340
DCG1502107B***A*	144,000	3,900	210,000	10.8 / 11.0	575-3	100 ⁵ / ₆₄	61 ¹ / ₂	58 ¹ / ₂	83	1340
DCG1502107V***A*	144,000	3,900	210,000	10.8 / 12.0	575-3	100 ⁵ / ₆₄	61 ¹ / ₂	58 ¹ / ₂	83	1340

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DCG — Three-Phase Packaged Gas/Electric (15 to 25 Tons)



The Daikin brand DCG Commercial Packaged Gas/Electric Units feature the chlorine-free refrigerant R-410A. Other features include our unique tubular heat exchanger and a high-efficiency scroll compressor. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



* Complete warranty details available from your local dealer or at www.daikincomfort.com.

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- Unique tubular heat exchanger
- High-efficiency scroll compressors
- Copper tube/aluminum fin coils
- Contactor with lugs
- 24-volt terminal strip
- High-capacity, steel-cased filter drier
- Built-in filter rack with standard 2" filters (convertible to 4" filters)
- High -and low- pressure switches
- AHRI Certified; ETL Listed
- Easy to service
- Full perimeter rail
- Aluminum micro-channel indoor coil on 25-ton units
- 25-ton unit contains two outdoor fans

Model	Nominal Capacities ¹			EER/IEER	AFUE	Voltage-Phase	Dimensions			dB(A)	Ship Weight (lbs.)
	Cooling	CFM	Heating				W"	D"	H"		
DCG1803503B***A*	180,000	5,600	350,000	10.8 / 11.0	80%	208-230/3	133½	88¾/32	50¾	88	2198
DCG1803503V***A*	180,000	5,600	350,000	10.8 / 12.6	80%	208-230/3	133½	88¾/32	50¾	88	2198
DCG1803504B***A*	180,000	5,600	350,000	10.8 / 11.0	80%	460/3	133½	88¾/32	50¾	88	2198
DCG1803504V***A*	180,000	5,600	350,000	10.8 / 12.6	80%	460/3	133½	88¾/32	50¾	88	2198
DCG1803507B***A*	180,000	5,600	350,000	10.8 / 11.0	80%	575/3	133½	88¾/32	50¾	88	2198
DCG1803507V***A*	180,000	5,600	350,000	10.8 / 12.6	80%	575/3	133½	88¾/32	50¾	88	2198
DCG2404003B***A*	240,000	7,000	400,000	9.8 / 10.0	80%	208-230/3	133½	88¾/32	50¾	88.3	2357
DCG2404003V***A*	240,000	7,000	400,000	9.8 / 11.3	80%	208-230/3	133½	88¾/32	50¾	88.3	2357
DCG2404004B***A*	240,000	7,000	400,000	9.8 / 10.0	80%	460/3	133½	88¾/32	50¾	88.3	2357
DCG2404004V***A*	240,000	7,000	400,000	9.8 / 11.3	80%	460/3	133½	88¾/32	50¾	88.3	2357
DCG2404007B***A*	240,000	7,000	400,000	9.8 / 10.0	80%	575/3	133½	88¾/32	50¾	88.3	2357
DCG2404007V***A*	240,000	7,000	400,000	9.8 / 11.3	80%	575/3	133½	88¾/32	50¾	88.3	2357

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.

Model	Nominal Capacities ¹			EER/IEER	AFUE	Voltage-Phase	Dimensions			dB(A)	Ship Weight (lbs.)
	Cooling	CFM	Heating				W"	D"	H"		
DCG3004003B***A*	290,000	8,200	400,000	9.8 / 10.0	80%	208-230/3	133½	88¾/32	53¾/32	92.3	2513
DCG3004003V***A*	290,000	8,200	400,000	9.8 / 11.4	80%	208-230/3	133½	88¾/32	53¾/32	92.3	2523
DCG3004004B***A*	290,000	8,200	400,000	9.8 / 10.0	80%	460/3	133½	88¾/32	53¾/32	92.3	2513
DCG3004004V***A*	290,000	8,200	400,000	9.8 / 11.4	80%	460/3	133½	88¾/32	53¾/32	92.3	2523
DCG3004007B***A*	290,000	8,200	400,000	9.8 / 10.0	80%	575/3	133½	88¾/32	53¾/32	92.3	2513
DCG3004007V***A*	290,000	8,200	400,000	9.8 / 11.4	80%	575/3	133½	88¾/32	53¾/32	92.3	2523

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DT Series — Single-Phase Packaged Units (3 to 5 Tons)



The Daikin brand DT High-Efficiency Commercial Packaged Air Conditioners and Heat Pumps feature a high-efficiency scroll compressor, high-capacity steel-cased filter drier, and easy access for servicing. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



PACKAGED UNITS

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- High-efficiency scroll compressor
- Copper tube/aluminum fin coils
- Contactor with lugs
- High-capacity, steel-cased filter drier
- 24-volt terminal strip
- Convertible airflow orientation
- Easy to service
- Built-in filter rack with standard 2" filters
- Heat Kits with single-point entry
- AHRI Certified; ETL Listed
- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Full perimeter rail; Curb fit

DTC Air Conditioners

Model	Cooling Capacity		SEER / EER	Voltage-Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	BTU/h	CFM				W"	D"	H"		
DTC036***1D***A*	35,600	1,200	15.5/ 13.0	208/230-1	10, 15	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	525
DTC048***1D***A*	45,500	1,600	15.0/ 12.0	208/230-1	10, 15, 18	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	560
DTC060***1D***A*	59,000	2,000	15.0/ 12.0	208/230-1	10, 15, 20	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	640

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.

DTH Heat Pumps

Model	Nominal Capacities ¹			SEER / EER	Voltage-Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	CFM	Heating				W"	D"	H"		
DTH036***1D***A*	35,400	1,200	34,800	15.0/12.0	208/230-1	10, 15	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	605
DTH048***1D***A*	46,500	1,600	44,500	15.0/12.0	208/230-1	10, 15, 18	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	610
DTH060***1D***A*	59,500	2,000	56,000	15.0/12.0	208/230-1	10, 15, 20	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	615

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.

DTG Gas/Electric

Model	Nominal Capacities ¹			SEER / EER	Voltage-Phase	AFUE	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	CFM	Heating				W"	D"	H"		
DTG0360451D***A*	35,600	1,200	46,000	15.5/13.0	208/230 - 1	81%	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	550
DTG0360901D***A*	35,600	1,200	92,000	15.5/13.0	208/230 - 1	81%	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	560
DTG0480901D***A*	45,500	1,600	92,000	15.0/12.0	208/230 - 1	81%	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	600
DTG0481151D***A*	45,500	1,600	115,000	15.0/12.0	208/230 - 1	81%	74 ¹ / ₁₆	48 ⁵ / ₁₆	38 ¹³ / ₁₆	78	597
DTG0600901D***A*	59,000	2,000	92,000	15.0/12.0	208/230 - 1	81%	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	638
DTG0601401D***A*	59,000	2,000	138,000	15.0/12.0	208/230 - 1	81%	74 ¹ / ₁₆	48 ⁵ / ₁₆	42 ¹³ / ₁₆	78	655

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DP13CM — Three-Phase Packaged Air Conditioners (3 to 5 Tons)

PACKAGED UNITS



The Daikin brand DP13CM Commercial Packaged Air Conditioner provides energy-efficient cooling and cooling performance in one self-contained unit. This unit uses the chlorine-free refrigerant R-410A. The DP13CM is housed in a heavy-gauge, galvanized-steel cabinet that offers a high-quality, UV-resistant powder-paint finish and allows for a ground-level or rooftop mount.



DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- Energy-efficient compressor with internal relief valve
- Fully charged R-410A system
- EEM blower motor; PSC blower motor on 3-ton units
- Copper tube/aluminum fin coils
- Totally enclosed, permanently lubricated condenser fan motor
- Electric heat kit available as a field-installed option
- Convertible airflow — horizontal or downflow
- Louvered condenser coil protection
- Heavy-gauge galvanized-steel cabinet with attractive Nickel Gray powder-paint finish
- Fully insulated air-handling compartment with convenient access panels

Model	Cooling Capacity		SEER/EER	Voltage-Phase	Electric Heat (kW)	Dimensions			dB(A)	Ship Weight (lbs)
	BTU/h	CFM				W"	D"	H"		
DP13CM3643	35,000	1,180	13 / 11	208/230-3	15	47	51	34%	80.1	365
DP13CM4843	45,500	1,675	13 / 11	208/230-3	15, 20	47	51	42%	81.7	435
DP13CM6043	56,000	1,750	13 / 10.9	208/230-3	15, 20	47	51	42%	80.2	445

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DP13HM — Three-Phase Packaged Heat Pumps (3 to 5 Tons)



**5 YEAR
PARTS
LIMITED
WARRANTY**

* Complete warranty details available from your local dealer or at www.daikincomfort.com.

The Daikin brand DP13HM Commercial Packaged Heat Pump provides energy-efficient cooling and heating performance in one self-contained unit. This unit uses the chlorine-free refrigerant R-410A. This unit is housed in a heavy-gauge, galvanized-steel cabinet that offers a high-quality, UV-resistant powder-paint finish and allows for a ground-level or rooftop mount.



PACKAGED
UNITS

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- Energy-efficient compressor with internal relief valve
- Fully charged with R-410A chlorine-free refrigerant
- EEM blower motor
- Copper tube/aluminum fin coil
- Convertible airflow — horizontal or downflow
- Totally enclosed, permanently lubricated condenser fan motor
- Electric heat kit available as a field-installed accessory
- Heavy-gauge galvanized-steel cabinet
- Attractive Nickel Gray powder-paint finish
- Fully insulated blower compartment with convenient access panels
- Louvered condenser coil protection
- One footprint; two heights

Model	Nominal Capacities ¹			Electric Heat (kW)	SEER/EER	Voltage-Phase	Dimensions			dB(A)	Ship Weight (lbs)
	Cooling	CFM	Heating				W"	D"	H"		
DP13HM3643**	34,600	1,200	34,600	15	13 / 11	208/230-3	47	51	34¾	80	400
DP13HM4843**	47,000	1,690	47,000	15, 20	13 / 11	208/230-3	47	51	42¾	80	485
DP13HM6043**	56,000	1,775	55,500	15, 20	13 / 10.9	208/230-3	47	51	42¾	80	495

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DP13GM — Three-Phase Packaged Gas/Electric (3 to 5 Tons)

PACKAGED UNITS



The Daikin brand DP13GM Commercial Packaged Gas/Electric Units feature the chlorine-free refrigerant R-410A. Other features include our corrosion-resistant tubular heat exchanger and an energy-efficient scroll compressor. These units are housed in a heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish.



* Complete warranty details available from your local dealer or at www.daikincomfort.com.

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- Energy-efficient compressor with internal relief valve
- EEM blower motor; PSC blower motor on 3-ton units
- Durable, corrosion-resistant aluminum-steel tubular heat exchanger
- Fully charged R-410A system
- Copper tube/aluminum fin coils
- Gas valve for natural gas with easy conversion to propane
- Direct-spark ignition system includes a microprocessor-based control for the entire ignition sequence
- All blower operation and all safety circuits complete with self-diagnostics
- All models comply with California Low NOx standards
- ARI Certified; ETL Certified
- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Fully insulated cabinet
- One roof curb fits all units
- One footprint; one height
- Convenient access panels
- Fits in a standard-size pick-up truck

Model	Nominal Capacities ¹			SEER/EER	AFUE	Voltage-Phase	Dimensions			dB(A)	Ship Weight (lbs.)
	Cooling	CFM	Heating				W"	D"	H"		
DP13GM3609043**	35,000	1,250	92,000	13 / 11	80%	208/230-3	47	51	34%	78	513
DP13GM4809043**	46,000	1,520	92,000	13 / 11	80%	208/230-3	47	51	42%	80	545
DP13GM6009043**	56,500	1,750	92,000	13 / 10.6	80%	208/230-3	47	51	42%	80	555
DP13GM6014043**	56,500	1,750	138,000	13 / 10.6	80%	208/230-3	47	51	42%	80	565

¹ BTU/h | Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



SPLIT SYSTEMS & AIR HANDLERS



DX13SA — 13 SEER Air Conditioners — 3 to 5 Tons



The Daikin brand DX13SA Three-Phase Air Conditioner uses the chlorine-free refrigerant R-410A and features operating sound levels that are among the best in the heating and cooling industry. With its 13 SEER rating, the DX13SA will help reduce energy consumption throughout the life of the system compared to lower SEER-rated equipment.



DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- Energy-efficient compressor
- Factory-installed filter drier
- Copper tube/enhanced aluminum fin coil
- Complies with ASHRAE Standard 90.1
- AHRI Certified; ETL Listed Louvered sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Nickel Gray powder-paint finish
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories

Model	Cooling Capacity (BTU/h)	SEER	Voltage-Phase	Dimensions			Service Valve		dB(A)	Ship Weight (lbs)
				W"	D"	H"	Liquid	Suction		
DX13SA0363**	36,000	13	208/230-3	29"	29"	28¾"	¾"	¾"	74	196
DX13SA0364**	36,000	13	460-3	29"	29"	28¾"	¾"	¾"	74	196
DX13SA0483**	48,000	13	208/230-3	29"	29"	36¾"	¾"	¾"	76	190
DX13SA0484**	48,000	13	460-3	29"	29"	36¾"	¾"	¾"	76	189
DX13SA0603**	60,000	13	208/230-3	35½"	35½"	38¾"	¾"	¾"	72	301
DX13SA0604**	60,000	13	460-3	35½"	35½"	38¾"	¾"	¾"	72	301

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.





* Complete warranty details available from your local dealer or at www.daikincomfort.com.

The Daikin DX11SA Commercial Air Conditioner cabinet features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and improved UV protection. Designed for ground-level or rooftop mount, the base pan elevates the unit above the slab to provide excellent water drainage and keep the coil away from debris that can collect inside the unit. The unit's attractive louvered metal guard protects the coil from damage and strengthens the unit.



DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- Energy-efficient compressor with internal pressure relief valve
- High-capacity, steel-cased filter drier
- High-efficiency copper tube/aluminum fin coil
- High- and low-pressure switches
- ARI Certified; ETL Listed
- Louvered sound control top design
- Steel louver coil guard protects coil from damage and adds strength to the unit
- Bottom pan rails elevate unit above slab
- Heavy-gauge galvanized-steel cabinet
- Attractive Nickel Gray powder-paint finish

Model	Cooling Capacity (BTU/h)	EER / IEER	Voltage-Phase	Dimensions			Service Valve		dB(A)	Ship Weight (lbs)
				W"	D"	H"	Liquid	Suction		
DX11SA0903**	88,000	11.2 / 11.5	208/230-3	35½	35½	37½	¾"	1½"	84	315
DX11SA0904**	90,000	11.2 / 11.5	460-3	35½	35½	37½	¾"	1½"	84	315
DX11SA1203**	114,000	11.2 / 11.5	208/230-3	35½	35½	41½	¾"	1½"	84	334
DX11SA1204**	112,000	11.2 / 11.5	460-3	35½	35½	41½	¾"	1½"	84	334

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DZ13SA — 13 SEER Heat Pumps — 3 to 5 Tons

The Daikin Commercial Heat Pump cabinet features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and improved UV protection. Designed for ground-level or rooftop mount, the base pan elevates the unit above the slab to provide excellent water drainage and keep the coil away from debris that can collect inside the heat pump. The unit's attractive louvered metal guard protects the coil from damage and strengthens the unit.



DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- Energy-efficient scroll compressor
- Low-pressure switch
- Liquid refrigerant return protection
- Factory-installed, bi-flow liquid line filter drier
- Copper tube / enhanced aluminum fin coil
- Reliable time-initiated, temperature-terminated defrost control
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed
- Louvered sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Nickel Gray powder-paint finish
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating

Model	Nominal Capacities (BTU/h)		SEER	Voltage-Phase	Dimensions			Service Valve		dB(A)	Ship Weight (lbs)
	Cooling	Heating			W"	D"	H"	Liquid	Suction		
DZ13SA0363**	35,000	34,000	13	208/230-3	29	29	32¼	¾"	¾"	74	232
DZ13SA0483**	46,000	44,000	13	208/230-3	29	29	34¼	¾"	1½"	76	235
DZ13SA0484**	46,000	44,000	13	460-3	29	29	34¼	¾"	1½"	76	234
DZ13SA0603**	57,000	58,000	13	208/230-3	35½	35½	34¼	¾"	1½"	75	262
DZ13SA0604**	57,000	58,000	13	460-3	35½	35½	34¼	¾"	1½"	75	261

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.





* Complete warranty details available from your local dealer or at www.daikincomfort.com.

The Daikin DZ11SA Commercial Heat Pump cabinet features a powder-paint finish over heavy-gauge galvanized steel that provides premium durability and improved UV protection. Designed for ground-level or rooftop mount, the base pan elevates the unit above the slab to provide excellent water drainage and keep the coil away from debris that can collect inside the unit. The unit's attractive louvered metal guard protects the coil from damage and strengthens the unit.



DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- R-410A chlorine-free refrigerant
- Energy-efficient compressor with internal pressure relief valve
- High-capacity, steel-cased, bi-flow heat pump filter drier
- Discharge line muffler
- Liquid refrigerant return protection
- Check flowrate heating mode expansion device
- Low-pressure switch
- Reliable, time-initiated, temperature-terminated defrost control
- Brass liquid and suction line service valves
- High-efficiency copper tube/aluminum fin coil
- ARI Certified; ETL Listed
- Louvered sound control top design
- Heavy-gauge galvanized-steel cabinet
- Steel louver coil guard protects coil from damage and adds strength to the unit
- Attractive Nickel Gray powder-paint finish

Model	Nominal Capacity (BTU/h)		EER	Voltage-Phase	Dimensions			Service Valve		dB(A)	Ship Weight (lbs)
	Cooling	Heating			W"	D"	H"	Liquid	Suction		
DZ11SA0903A	87,000	82,000	11	208/230	35½	35½	37½	¾"	1½"	84	334
DZ11SA0904A	87,000	82,000	11	460	35½	35½	37½	¾"	1½"	84	334
DZ11SA1203A	110,000	100,000	11	208/230	35½	35½	41½	¾"	1½"	84	383
DZ11SA1204A	110,000	100,000	11	460	35½	35½	41½	¾"	1½"	84	383

Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



DAR / DAT — Multi-Speed, Upflow Air Handler — 7½ and 10 Tons



The Daikin DAR/DAT Multi-Speed, Multi-Position Air Handlers are suitable for upflow or left-side horizontal installations to accompany your 7½- and 10-ton split-system units. These unit feature a fully insulated fiberglass blanket for quiet, efficient operation.



* Complete warranty details available from your local dealer or at www.daikincomfort.com.

DESIGNED FOR EXCEPTIONAL DURABILITY, ENERGY EFFICIENCY, AND OUTSTANDING PERFORMANCE.

- 10-ton model circuited for use with two 4- or 5-ton cooling-only or heat pump systems, or one 10-ton cooling-only or heat pump system
- All models convertible to 460-3-60 from 208/230-3-60
- Copper tube/aluminum fin coils
- Transformer and blower relay TXV control: 7½-ton unit has one (1); 10-ton unit has two (2) thermal expansion check valves
- Draw-thru centrifugal blower is belt-driven for quiet, efficient operation
- Heavy-gauge, reinforced, galvanized-steel cabinet
- Fully insulated with fiberglass blanket
- Horizontal and vertical condensate pans
- Built-in filter rack (2" filter included)
- Entry on top of panel for both low and high voltages
- Removable access panels make servicing of unit faster and easier

Model	Nominal Cooling (BTU/h)	Electric Heat (kW)	CFM @ 0.3" ESP	Voltage-Phase	Dimensions			Service Valve		Ship Weight (lbs)
					W"	D"	H"	Liquid	Suction	
DAR09043*	90,000	15, 20, 30	3,000	208/240-3	48½	24	60½	¾"	1½"	405
DAR09044*	90,000	15, 20, 30	3,000	460-3	48½	24	60½	¾"	1¾"	405
DAR12043*	120,000	15, 20, 30	4,000	208/240-3	48½	24	60½	¾" *	1½" *	430
DAR12044*	120,000	15, 20, 30	4,000	460-3	48½	24	60½	¾" *	1½" *	430
DAT09043**	90,000	15, 20, 30	3,000	208/240-3	48½	24	60½	¾" *	1½" *	430
DAT09044**	90,000	15, 20, 30	3,000	460-3	48½	24	60½	¾" *	1½" *	430
DAT12043**	120,000	15, 20, 30	4,000	208/240-3	48½	24	60½	¾" *	1½" *	430
DAT12044**	120,000	15, 20, 30	4,000	460-3	48½	24	60½	¾" *	1½" *	430

* For two refrigerant lines
 Daikin North America LLC, reserves the right to discontinue or change at any time specifications or designs without notice or without incurring obligations.



ACCESSORIES



DCC / DCH / DCG / Packaged Units

3 TO 6 TONS

Field Accessory Item #	Description	Fits Model Sizes	Field-Installed	Factory-Installed
14CURB3672	14" Roof Curb	3-6 tons	✓	
D25FD3672	25% Manual Fresh Air Damper	3-6 tons	✓	
D25MFD3672	25% Motorized Fresh Air Damper	3-6 tons	✓	
DDNBBS3672	Burglar Bar Sleeves with Supply & Return	3-6 tons	✓	
CDK36	Concentric Duct Kit	3 tons	✓	
CDK4872	Concentric Duct Kit	4-6 tons	✓	
HAILGD03D	Condenser Coil Hail Guard	3-5 tons	✓	
HAILGD04D	Condenser Coil Hail Guard	6 tons	✓	
	Convenience Outlet: Non Powered	All Models		✓
	Convenience Outlet: Powered	All Models		✓
	Disconnect Switch	All Models		✓
DDNECNJ3672B	Downflow Economizer	3-6 tons	✓	
DDNECNJ3672NR	Downflow Economizer w/o Barometric Relief	3-6 Tons	✓	
DDNSQRD3616	Downflow Square-to-Round Adapter (16" Round)	3 tons	✓	
DDNSQRD487218	Downflow Square-to-Round Adapter (18" Round)	4-6 tons	✓	
	Electric Heat Kits for DCC/DCH	All Models	✓	✓
HA-02	High-Altitude Kit (DCG units only)	All Models	✓	
HSKT036B	High-Static Kit (230/460V)	3 tons	✓	
HSKT048B	High-Static Kit (230/460V)	4 tons	✓	
HSKT060B	High-Static Kit (230/460V)	5 tons	✓	
HSKT072B	High-Static Kit (230/460V)	6 tons	✓	
HSKT036B-7	High-Static Kit (575V)	3 tons	✓	
HSKT048B-7	High-Static Kit (575V)	4 tons	✓	
HSKT060B-7	High-Static Kit (575V)	5 tons	✓	
HSKT072B-7	High-Static Kit (575V)	6 tons	✓	
DHZECNJ3672	Horizontal Economizer	3-6 tons	✓	
GHRC-1	Hurricane Restraint Clips	All Models	✓	
DBRD3672	Barometric Relief Damper	3-6 tons	✓	
LAKT01	Low-Ambient Kit	3-6 tons	✓	✓
LPM-06	LP Conversion Kit (DCG units only)	3-6 tons	✓	
LPT-03	LP Conversion Kit (DCG036045 only)	3 tons	✓	
DPE36722	Power Exhaust (208/230 Volt)	3-6 tons	✓	
DPE36724	Power Exhaust (460 Volt)	3-6 tons	✓	
DPE36727	Power Exhaust (575V)	3-6 tons	✓	
	Smoke Detector	All Models		✓
	Hinged Panels	3-6 tons		✓



DCC / DCH / DCG Packaged Units

7½ TO 12½ TONS

Field Accessory Item #	Description	Fits Model Sizes	Field-Installed	Factory-Installed
14CURB90150	14" Roof Curb	7½-12½ tons	√	
D25FD90150	25% Manual Fresh Air Damper	7½-12½ tons	√	
D25MFD90150	25% Motorized Fresh Air Damper	7½-12½ tons	√	
DBRD3672	Barometric Relief Damper (2 required)	7½-12½ tons	√	
DDNBBS90150	Burglar Bar Sleeves: includes Supply & Return	7½-12½ tons	√	
CDK120	Concentric Duct Kit	10 tons	√	
CDK150	Concentric Duct Kit	12½ tons	√	
CDK90102	Concentric Duct Kit	7½-8½ tons	√	
HailGD02D	Condenser Coil Hail Guard	7½-10 tons	√	
HailGD05D	Condenser Coil Hail Guard	12½ tons	√	
	Convenience Outlet: Powered	All Models		√
	Convenience Outlet: Non Powered	All Models		√
	Disconnect Switch (non-fused)	All Models		√
DDNECNJ90150B	Downflow Economizer	7½-12½ tons	√	
DDNSQRD9020	Downflow Square-to-Round Adapter 20" Round	7½ tons	√	
	Electric Heat Kits for DCC/DCH	All Models	√	√
HAKT36300	High-Altitude Kit (DCG units only)	All Models	√	
HSKT090 ¹	High-Static Kit (230/460V)	7½-8½ tons	√	
HSKT090G ¹	High-Static Kit (230/460V) (DCC/DCG only)	7½ tons	√	
HSKT120 ¹	High-Static Kit (230/460V)	10 tons	√	
HSKT150 ¹	High-Static Kit (230/460V)	12½ tons	√	
HSKT090-7 ¹	High-Static Kit (575V)	7½-8½ tons	√	
HSKT090G-7 ¹	High-Static Kit (575V) (DCC/DCG only)	7½ tons	√	
HSKT120-7 ¹	High-Static Kit (575V)	10 tons	√	
HSKT150-7 ¹	High-Static Kit (575V)	12½ tons	√	
DHZECNJ90150	Horizontal Economizer	7½-12½ tons	√	
GHRC-1	Hurricane Restraint Clips	All Models	√	
LAKT03	Low-Ambient Kit	7½ - 12½ tons	√	√
LPKT36150	LP Conversion Kit (DCG units only)	7½-12½ tons	√	√
DPE901502	Power Exhaust (208/230V)	7½-12½ tons	√	
DPE901504	Power Exhaust (460V)	7½-12½ tons	√	
DPE901507	Power Exhaust (575V)	7½-12½ tons	√	
	Smoke Detector	All Models		√

¹ HSKT High-Static Kits are for use with standard single-speed belt-drive units only.



DCC / DCG Packaged Units

15 - 25 TONS

Field Accessory Item #	Description	Fits Model Sizes	Field-Installed	Factory-Installed
14CURB180300	14" Roof Curb	15-25 tons	√	
D25FD180300	25% Manual Fresh Air Damper	15-25 tons	√	
D25MFD180300	25% Motorized Fresh Air Damper	15-25 tons	√	
DDNBB180240	Burglar Bar Sleeves with Supply and Return	15-25 tons	√	
CDK180	Concentric Duct Kit	15 tons	√	
CDK240	Concentric Duct Kit	20 tons	√	
CDK300	Concentric Duct Kit	25 tons	√	
	Convenience Outlet: Powered	All Models		√
	Convenience Outlet: Non Powered	All Models		√
	Disconnect Switch (non-fused)	All Models		√
DDNECNJ180300B	Downflow Economizer	15-25 tons	√	√
	Electric Heat Kits (75kW not available as factory-installed kit) for DCC only	All Models	√	√
HAKT36300	High-Altitude Kit	All Models	√	
HSKT180 ¹	High-Static Kit (230/460V)	15 tons	√	
HSKT180G ¹	High-Static Kit (230/460V) (DCG only)	15 tons	√	
HSKT240 ¹	High-Static Kit (230/460V)	20 tons	√	
HSKT180-7 ¹	High-Static Kit (575V)	15 tons	√	
HSKT180G-7 ¹	High-Static Kit (575V) (DCG only)	15 tons	√	
HSKT240-7 ¹	High-Static Kit (575V)	20 tons	√	
HSKT300C ¹	High-Static Kit (all voltages)	25 tons	√	
HSKT300G ¹	High-Static Kit (all voltages)	25 tons	√	
HZCURB180240ED	Horizontal Discharge Curb — End Discharge	15-25 tons	√	
HZCURB180240SDN	Horizontal Discharge Curb — Side Discharge; duct openings on non-service side	15-25 tons	√	
HZCURB180240SDS	Horizontal Discharge Curb — Side Discharge; duct openings on service side	15-25 tons	√	
GHRC-1	Hurricane Restraint Clips	All Models	√	
LAKT03	Low-Ambient Kit	15-20 tons	√	√
LPKT180300A	LP Conversion Kit (for DCG)	15-25 tons	√	
DPE1803002	Power Exhaust (208/230V)	15-25 tons	√	
DPE1803004	Power Exhaust (460V)	15-25 tons	√	
DPE1803007	Power Exhaust (575V)	15-25 tons	√	
	Smoke Detector	All Models		√
FSK024	Freeze Stat Kit	25 tons	√ ²	

¹ HSKT High-static kits are for use with standard single-speed belt-drive units only.

² FSK024 is standard on 2 speed, V, models, and field installed for single speed, B, models.



DTC / DTH / DTG Packaged Units

3 - 5 TONS

DAIKIN MASTER ITEM #	DESCRIPTION	FITS MODEL SIZES	FIELD-INSTALLED	FACTORY-INSTALLED
14CURB3672B	14" Roof Curb	3-5 tons	√	
D25FD3672	25% Manual Fresh Air Damper	3-5 tons	√	
D25MFD3672	25% Motorized Fresh Air Damper	3-5 tons	√	
DDNBBS3672	Burglar Bar Sleeves with Supply & Return	3-5 tons	√	
CDK36	Concentric Duct Kit	3 tons	√	
CDK4872	Concentric Duct Kit	4-5 tons	√	
HAILGD03D	Condenser Coil Hail Guard	3-4 tons	√	
HAILGD04D	Condenser Coil Hail Guard	5 tons	√	
	Convenience Outlet: Non Powered	All Models		√
	Convenience Outlet: Powered	All Models		√
DDNECNJ3672B	Downflow Economizer	3-5 tons	√	
DDNECNJ3672NR	Downflow Economizer w/o Barometric Relief	3-5 tons	√	
DDNSQRD3616	Downflow Square-to-Round Adapter (16" Round)	3 tons	√	
DDNSQRD487218	Downflow Square-to-Round Adapter (18" Round)	4-5 tons	√	
	Electric Heat Kits	All Models	√	√
DHZECNJ3672	Horizontal Economizer	3-5 tons	√	
GHRC-1	Hurricane Restraint Clips	All Models	√	
DBRD3672	Barometric Relief Damper	3-5 tons	√	
LAKT01	Low-Ambient Kit	3-5 tons	√	√
LPM-06	LP Conversion Kit (DCG units only)	3-6 tons	√	
LPT-03	LP Conversion Kit (DCG036045 only)	3 tons	√	
DPE36722	Power Exhaust (208/230 Volt)	3-5 tons	√	
DPE36724	Power Exhaust (460 Volt)	3-5 tons	√	
DPE36727	Power Exhaust (575V)	3-5 tons	√	
	Smoke Detector	All Models		√
	Hinged Panels	3-5 tons		√



LIGHT COMMERCIAL PACKAGED UNITS

DP13CM / DP13HM

Accessory Item #	Description	Fits Chassis Size
20464501NGK	Horizontal Duct Cover	Medium
20464502NGK	Horizontal Duct Cover	Large
DDNECNJPCHMM	Downflow Economizer	Medium
DDNECNJPCHML	Downflow Economizer	Large
DPHFRA	External Horizontal Filter Rack	All Sizes
DHZECNJPGCHM	Horizontal Economizer	Medium
DHZECNJPGCHL	Horizontal Economizer	Large
DDN25FDPGCHMM	25% Manual Downflow Fresh Air Damper	Small & Med.
DDN25FDPGCHML	25% Manual Downflow Fresh Air Damper	Large
DHZ25FDPGCHMM	25% Manual Horizontal Fresh Air Damper	Medium
DHZ25FDPGCHML	25% Manual Horizontal Fresh Air Damper	Large
DDN25MFDPGCHMM	25% Motorized Downflow Fresh Air Damper	Small & Med.
DDN25MFDPGCHML	25% Motorized Downflow Fresh Air Damper	Large
DHZ25MFDPGCHMM	25% Motorized Horizontal Fresh Air Damper	Medium
DHZ25MFDPGCHML	25% Motorized Horizontal Fresh Air Damper	Large
OT/EHR18-60	Outdoor Thermostat and Emergency Heat Relay Kit	All Sizes
OT18-60A	Outdoor Thermostat Kit with Lockout Stat	All Sizes
D14CURBPGCHMA	Roof Curb	All Sizes
SQRPG101/102	Square-to-Round Adapter w/ 16" Round for Downflow Application	Small & Med.
SQRPG103	Square-to-Round Adapter w/ 18" Round for Downflow Application	Large
SQRPGH101/102	Square-to-Round Adapters (16" x 14")	Small & Med.
SQRPGH103	Square-to-Round Adapters (18" x 14")	Large



LIGHT COMMERCIAL PACKAGED UNITS (CONT.)

DP13GM

Accessory Item #	Description	Fits Chassis Size
14CURBPGCHMA	14" Tall Roof Curb	All Sizes
DDN25FDPGCHMM	25% Manual Downflow Fresh Air Damper	Medium
DDN25FDPGCHML	25% Manual Downflow Fresh Air Damper	Large
DHZ25FDPGCHMM	25% Manual Horizontal Fresh Air Damper	Medium
DHZ25FDPGCHML	25% Manual Horizontal Fresh Air Damper	Large
DDN25MFDPGCHMM	25% Motorized Downflow Fresh Air Damper	Medium
DDN25MFDPGCHML	25% Motorized Downflow Fresh Air Damper	Large
DHZ25MFDPGCHMM	25% Motorized Horizontal Fresh Air Damper	Medium
DHZ25MFDPGCHML	25% Motorized Horizontal Fresh Air Damper	Large
DDNECNJPGMM	Downflow Economizer	Medium
DDNECNJPGML	Downflow Economizer	Large
DPHFRA	External Horizontal Filter Rack for Electric/Electric Units	All Sizes
HA-02	High-Altitude Kit	All Sizes
20464501NGK	Horizontal Duct Cover	Medium
20464502NGK	Horizontal Duct Cover	Large
DHZECNJPCHM	Horizontal Economizer	Medium
DHZECNJPCHL	Horizontal Economizer	Large
LPT-03A	LP Conversion Kit	Large
SQRPG101/102	Square-to-Round Adapter w/ 16" Round Downflow Application	Medium
SQRPG103	Square-to-Round Adapter w/ 18" Round Downflow Application	Large
SQRPGH101/102	Square-to-Round Adapter w/ 16" Round Horizontal Application	Medium
SQRPGH103	Square-to-Round Adapter w/ 18" Round Horizontal Application	Large



Split Systems

AIR CONDITIONERS

Item #	Description
ABK-20	Anchor Bracket Kit ^
ASC-01	Anti-Short Cycle Kit
CSR-U-1	Hard-start Kit
CSR-U-2	Hard-start Kit
CSR-U-3	Hard-start Kit
FSK01A ¹	Freeze Protection Kit
LSK01A ²	Liquid Line Solenoid Kit
LAKT01	Low-Ambient Kit
LSK01A	Liquid Line Solenoid Kit
0163R00002	Crankcase heater
0163R00003	Crankcase heater
0163R00004	Crankcase Heater
OY18-60A	Outdoor Thermostat
TX3N4 ²	TXV Kit
TX5N4 ²	TXV Kit

^ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.

HEAT PUMPS

Item #	Description
0130R00000S	Low-pressure Switch Kit
ABK-20	Anchor Bracket Kit ^
AFE18-60A	All-fuel Kit
ASC-01	Anti-Short Cycle Kit
CSR-U-1	Hard-start Kit
CSR-U-2	Hard-start Kit
CSR-U-3	Hard-start Kit
FSK01A ¹	Freeze Protection Kit
LAKT-01	Low-Ambient Kit
OT18-60A ²	Outdoor Thermostat
OT/EHR18-60	Emergency Heat Relay kit
TX3N4 ²	TXV Kit
TX5N4 ²	TXV Kit

^ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0°F with 50% or higher relative humidity.

³ Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit.



DTC / DTH / DCC / DCH Packaged Unit Heat Kit Match-Ups

3 TO 6 TONS

DCC, DTC — Heat Kit Usage

Single-Phase Units @ 208 / 240V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DTC036***1D	25	40		
EHK1-10	48 / 55	50 / 60	10	1250-1350 CFM
EHK1-15	70 / 81	80 / 90	15	1400-1440 CFM
DTC048***1D	29	45		
EHK1-10	48 / 56	50 / 60	10	1400-1800 CFM
EHK1-15	71 / 82	80 / 90	15	1575-1800 CFM
EHK1-18	84 / 97	90 / 100	18	1575-1800 CFM
DTC060***1D	42	60		
EHK1-10	53 / 62	60 / 70	10	1750-2250 CFM
EHK1-15	76 / 88	80 / 90	15	1750-2250 CFM
EHK1-20	99 / 114	100 / 120	20	1850-2250 CFM

Three-Phase Units @ 208 / 240V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCC036***3D	17	25		
EHK1-10	29 / 33	30 / 35	10	1250-1350 CFM
EHK1-15	42 / 48	45 / 50	15	1400-1440 CFM
DCC036***3B	18	25		
EHK3-10	30 / 33	35 / 35	10	1250-1350 CFM
EHK3-15	43 / 48	45 / 50	15	1400-1440 CFM
DCC048***3D	21	30		
EHK3-10	29 / 34	35 / 35	10	1400-1800 CFM
EHK3-15	42 / 49	45 / 50	15	1575-1800 CFM
EHK3-18	50 / 58	60 / 60	18	1575-1800 CFM
DCC048***3B	22	30		
EHK3-10	30 / 35	35 / 35	10	1400-1800 CFM
EHK3-15	43 / 50	45 / 50	15	1575-1800 CFM
EHK3-18	51 / 59	60 / 60	18	1575-1800 CFM
DCC060***3D	29	45		
EHK3-10	34 / 40	35 / 45	10	1750-2250 CFM
EHK3-15	47 / 55	50 / 60	15	1750-2250 CFM
EHK3-20	60 / 70	70 / 70	20	1850-2250 CFM
DCC060***3B	25	40		
EHK3-10	30 / 35	35 / 40	10	1750-2250 CFM
EHK3-15	43 / 50	45 / 50	15	1750-2250 CFM
EHK3-20	56 / 65	60 / 70	20	1850-2250 CFM
DCC072***3B	31	45		
EHK3-10	36	45	10	2,100-2,700 CFM
EHK3-15	51	60	15	2,100-2,700 CFM
EHK3-20	66	70	20	2,100-2,700 CFM
EHK3-25	81	90	25	2,100-2,700 CFM

¹ Minimum Circuit Ampacity

² Maximum Overcurrent Protection device

DCH, DTH — Heat Kit Usage

Single-Phase Units @ 208 / 240V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DTH036***1D	25	40		
EHK1-10	67 / 77	70 / 80	10	1250-1350 CFM
EHK1-15	89 / 103	90 / 110	15	1400-1440 CFM
DTH048***1D	29	45		
EHK1-10	70 / 81	80 / 90	10	1400-1800 CFM
EHK1-15	93 / 107	100 / 110	15	1575-1800 CFM
EHK1-18	107 / 123	110 / 125	18	1575-1800 CFM
DTH060***1D	42	60		
EHK1-10	82 / 94	90 / 110	10	1750-2250 CFM
EHK1-15	104 / 120	110 / 125	15	1750-2250 CFM
EHK1-20	127 / 146	150 / 150	20	1850-2250 CFM

Three-Phase Units @ 208 / 240V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCH036***3D	17	25		
EHK3-10	41 / 47	45 / 50	10	1250-1350 CFM
EHK3-15	54 / 62	60 / 70	15	1400-1440 CFM
DCH036***3B	18	25		
EHK3-10	42 / 48	45 / 50	10	1250-1350 CFM
EHK3-15	55 / 63	60 / 70	15	1400-1440 CFM
DCH048***3D	21	30		
EHK3-10	44 / 51	45 / 60	10	1400-1800 CFM
EHK3-15	57 / 66	60 / 70	15	1575-1800 CFM
EHK3-18	65 / 75	70 / 80	18	1575-1800 CFM
DCH048***3B	22	30		
EHK3-10	45 / 52	45 / 60	10	1400-1800 CFM
EHK3-15	58 / 67	60 / 70	15	1575-1800 CFM
EHK3-18	66 / 76	70 / 80	18	1575-1800 CFM
DCH060***3D	29	45		
EHK3-10	51 / 59	60 / 60	10	1750-2250 CFM
EHK3-15	64 / 74	70 / 80	15	1750-2250 CFM
EHK3-20	77 / 89	80 / 90	20	1850-2250 CFM
DCH060***3B	25	40		
EHK3-10	48 / 55	50 / 60	10	1750-2250 CFM
EHK3-15	61 / 70	70 / 80	15	1750-2250 CFM
EHK3-20	74 / 85	80 / 90	20	1850-2250 CFM
DCH072***3B	31	45		
EHK3-10	61	70	10	2,100-2,700 CFM
EHK3-15	76	80	15	2,100-2,700 CFM
EHK3-20	91	100	20	2,100-2,700 CFM
EHK3-25	106	110	25	2,100-2,700 CFM

¹ Minimum Circuit Ampacity

² Maximum Overcurrent Protection device



DCC / DCH Packaged Unit Heat Kit Match-Ups

3 TO 6 TONS (CONT.)

DCC — Heat Kit Usage

Three-Phase Units @ 480V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCC036***4B***	10	15		
EHK4-10	17	20	10	1250-1350 CFM
EHK4-15	25	25	15	1400-1440 CFM
DCC048***4B***	10	15		
EHK4-10	17	20	10	1400-1800 CFM
EHK4-15	25	25	15	1575-1800 CFM
EHK4-18	29	30	18	1575-1800 CFM
DCC060***4B***	12	20		
EHK4-10	19	20	10	1750-2250 CFM
EHK4-15	25	25	15	1750-2250 CFM
EHK4-20	35	35	20	1850-2250 CFM
DCC072***4B***	16	25		
EHK4-10	18	25	10	2,100-2,700 CFM
EHK4-15	26	30	15	2,100-2,700 CFM
EHK4-20	33	35	20	2,100-2,700 CFM
EHK4-25	41	45	25	2,100-2,700 CFM

DCH — Heat Kit Usage

Three-Phase Units @ 480V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCH036***4B***	10	15		
EHK4-10	25	25	10	1250-1350 CFM
EHK4-15	33	35	15	1400-1440 CFM
DCH048***4B***	10	15		
EHK4-10	25	30	10	1400-1800 CFM
EHK4-15	33	35	15	1575-1800 CFM
EHK4-18	37	40	18	1575-1800 CFM
DCH060***4B***	12	20		
EHK4-10	27	30	10	1750-2250 CFM
EHK4-15	35	40	15	1750-2250 CFM
EHK4-20	43	45	20	1850-2250 CFM
DCH072***4B***	16	25		
EHK4-10	31	35	10	2,100-2,700 CFM
EHK4-15	38	40	15	2,100-2,700 CFM
EHK4-20	46	50	20	2,100-2,700 CFM
EHK4-25	53	60	25	2,100-2,700 CFM

Three-Phase Units @ 575V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCC036***7B***	8	15		
EHK7-10	15	20	10	1250-1350 CFM
EHK7-15	22	25	15	1400-1440 CFM
DCC048***7B***	8	15		
EHK7-10	15	20	10	1400-1800 CFM
EHK7-15	22	25	15	1575-1800 CFM
EHK7-18	25	30	18	1575-1800 CFM
DCC060***7B***	10	15		
EHK7-10	15	20	10	1750-2250 CFM
EHK7-15	22	25	15	1750-2250 CFM
EHK7-20	28	30	20	1850-2250 CFM
DCC072***7B***	13	15		
EHK7-10	15	20	10	2,100-2,700 CFM
EHK7-15	22	25	15	2,100-2,700 CFM
EHK7-20	28	30	20	2,100-2,700 CFM
EHK7-25	34	35	25	2,100-2,700 CFM

Three-Phase Units @ 575V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCH036***7B***	8	15		
EHK7-10	20	25	10	1400-1475 CFM
EHK7-15	26	30	15	1575-1650 CFM
DCH048***7B***	8	15		
EHK7-10	21	25	10	1400-1800 CFM
EHK7-15	27	30	15	1575-1800 CFM
EHK7-18	31	35	18	1575-1800 CFM
DCH060***7B***	10	15		
EHK7-10	23	25	10	1750-2250 CFM
EHK7-15	29	30	15	1750-2250 CFM
EHK7-20	35	40	20	1850-2250 CFM
DCH072***7B***	13	15		
EHK7-10	25	30	10	2,100-2,700 CFM
EHK7-15	31	35	15	2,100-2,700 CFM
EHK7-20	38	40	20	2,100-2,700 CFM
EHK7-25	44	45	25	2,100-2,700 CFM

¹ Minimum Circuit Ampacity
² Maximum Overcurrent Protection device

¹ Minimum Circuit Ampacity
² Maximum Overcurrent Protection device



DCC / DCH Packaged Unit Heat Kit Match-Ups

7½ TO 12½ TONS

DCC — Heat Kit Usage

Three-Phase Units @ 208 / 240V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCC090***3B/V***	37	50		
EHK3-16	48 / 55	50 / 60	15	3000-3375 CFM
EHK3-30	87 / 100	90 / 100	30	3000-3375 CFM
EHK3-45	121 / 139	125 / 150	43	3000-3375 CFM
DCC102***3B/V***	43	50		
EHK3-16	55	60	15	3400 - 3825 CFM
EHK3-30	100	100	30	3400 - 3825 CFM
EHK3-45	139	150	43	3400 - 3825 CFM
DCC120***3B/V***	49	60		
EHK3-16	48 / 55	50 / 60	15	3,500-4,500 CFM
EHK3-30	87 / 100	90 / 100	30	3,500-4,500 CFM
EHK3-45	121 / 139	125 / 150	43	4,000-4,500 CFM
DCC150***3B/V***	65	80		
EHK3-16	65	80	15	4,000-5,600 CFM
EHK3-30	102	110	30	4,300-5,600 CFM
EHK3-45	141	150	43	4,500-5,600 CFM

DCH — Heat Kit Usage

Three-Phase Units @ 208 / 240V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCH090***3B/V***	40	50		
EHK3-16	74 / 85	80 / 90	15	3000-3375 CFM
EHK3-30	113 / 130	120 / 150	30	3000-3375 CFM
EHK3-45	147 / 169	150 / 175	43	3000-3375 CFM
DCH102***3B/V***	43	50		
EHK3-16	88	90	15	3400 - 3825 CFM
EHK3-30	133	150	35	3400 - 3825 CFM
EHK3-45	173	175	43	3400 - 3825 CFM
DCH120***3B/V***	49	60		
EHK3-16	81 / 94	90 / 100	15	3,500-4,500 CFM
EHK3-30	122 / 139	125 / 150	35	3,500-4,500 CFM
EHK3-45	154 / 178	175 / 200	43	4,000-4,500 CFM
DCH150***3B/V***	65	80		
EHK3-16	110	110	15	4,000-5,600 CFM
EHK3-30	155	175	30	4,300-5,600 CFM
EHK3-45	194	200	43	4,500-5,600 CFM

Three-Phase Units @ 480V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCC090***4B/V***	18	20		
EHK4-16	26	30	15	3000-3375 CFM
EHK4-30	48	50	30	3000-3375 CFM
EHK4-45	68	70	43	3000-3375 CFM
DCC102***4B/V***	20	25		
EHK4-16	27	30	15	3400 - 3825 CFM
EHK4-30	50	50	30	3400 - 3825 CFM
EHK4-45	70	70	43	3400 - 3825 CFM
DCC120***4B/V***	24	30		
EHK4-16	27	30	15	3,500-4,500 CFM
EHK4-30	50	50	30	3,500-4,500 CFM
EHK4-45	70	70	43	4,000-4,500 CFM
DCC150***4B/V***	31	40		
EHK4-16	31	40	15	4,000-5,600 CFM
EHK4-30	51	60	30	4,300-5,600 CFM
EHK4-45	71	80	43	4,500-5,600 CFM

Three-Phase Units @ 480V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCH090***4B/V***	19	25		
EHK4-16	42	45	15	3000-3375 CFM
EHK4-30	64	70	30	3000-3375 CFM
EHK4-45	84	90	43	3000-3375 CFM
DCH102***4B/V***	20	25		
EHK4-16	42	45	15	3400 - 3825 CFM
EHK4-30	65	70	30	3400 - 3825 CFM
EHK4-45	84	90	43	3400 - 3825 CFM
DCH120***4B/V***	24	30		
EHK4-16	46	50	15	3,500-4,500 CFM
EHK4-30	69	70	30	3,500-4,500 CFM
EHK4-45	89	90	43	4,000-4,500 CFM
DCH150***4B/V***	31	40		
EHK4-16	54	60	15	4,000-5,600 CFM
EHK4-30	76	80	30	4,300-5,600 CFM
EHK4-45	96	100	43	4,500-5,600 CFM

¹ Minimum Circuit Ampacity

² Maximum Overcurrent Protection device

¹ Minimum Circuit Ampacity

² Maximum Overcurrent Protection device



DCC / DCH Packaged Unit Heat Kit Match-Ups

7½ TO 12½ TONS (CONT.)

DCC — Heat Kit Usage

Three-Phase Units @ 575V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCC090***7B/V***	14	15		
EHK7-16	22	25	15	---
EHK7-30	41	45	30	---
EHK7-45	57	60	43	---
DCC102***7B/V***	17	20		
EHK7-16	22	25	15	3400 - 3825 CFM
EHK7-30	41	45	30	3400 - 3825 CFM
EHK7-45	57	60	43	3400 - 3825 CFM
DCC120***7B/V***	17	20		
EHK7-16	22	25	15	3,500-4,500 CFM
EHK7-30	41	45	30	3,500-4,500 CFM
EHK7-45	57	60	43	4,000-4,500 CFM
DCC150***7B/V***	23	30		
EHK7-16	24	30	15	4,000-5,600 CFM
EHK7-30	43	45	30	4,300-5,600 CFM
EHK7-45	59	60	43	4,500-5,600 CFM

¹ Minimum Circuit Ampacity

² Maximum Overcurrent Protection device

DCH — Heat Kit Usage

Three-Phase Units @ 575V

Model	MCA ¹	MOP ² (amps)	kW & BTU/h	Recommended Airflow Range
DCH090***7B/V***	14	15		
EHK7-16	32	35	15	---
EHK7-30	51	60	30	---
EHK7-45	68	70	43	---
DCH102***7B/V***	17	20		
EHK7-16	36	40	15	3400 - 3825 CFM
EHK7-30	55	60	30	3400 - 3825 CFM
EHK7-45	71	80	43	3400 - 3825 CFM
DCH120***7B/V***	17	20		
EHK7-16	36	40	15	3,500-4,500 CFM
EHK7-30	55	60	30	3,500-4,500 CFM
EHK7-45	71	80	43	4,000-4,500 CFM
DCH150***7B/V***	23	30		
EHK7-16	42	45	15	4,000-5,600 CFM
EHK7-30	61	70	30	4,300-5,600 CFM
EHK7-45	77	80	43	4,500-5,600 CFM

¹ Minimum Circuit Ampacity

² Maximum Overcurrent Protection device



DCC Packaged Unit Heat Kit Match-Ups

15 TO 25 TONS

DCC — Heat Kit Usage

DCC180***(3B/3V) @ 208 / 240V – 15 Tons

MODEL	MCA ^{1,3} (3B/3V)	MOP ^{2,3} (3B/3V)	ACTUAL kW @ 240V	RECOMMENDED AIRFLOW RANGE
EHK3-31	98.0/98.0	100/100	28.8	5250 - 6750 CFM
EHK3-46	141.0/141.3	150/150	43.2	5250 - 6750 CFM
EHK3-60	185.0/184.6	200/200	57.6	5250 - 6750 CFM

DCC180***(4B/4V) @ 480V – 15 Tons

MODEL	MCA ^{1,3} (4B/4V)	MOP ^{2,3} (4B/4V)	ACTUAL kW @ 480V	RECOMMENDED AIRFLOW RANGE
EHK4-31	49.0/48.7	50/50	28.8	5250 - 6750 CFM
EHK4-46	71.0/70.3	80/80	43.2	5250 - 6750 CFM
EHK4-60	92.0/92.0	100/100	57.6	5250 - 6750 CFM

DCC180***(7B/7V) @575V – 15 Tons

MODEL	MCA ^{1,3} (7B/7V)	MOP ^{2,3} (7B/7V)	ACTUAL kW @ 575V	RECOMMENDED AIRFLOW RANGE
EHK7-31	41.0/40.5	45/45	28.8	5250 - 6750 CFM
EHK7-46	59.0/58.6	60/60	43.2	5250 - 6750 CFM
EHK7-60	78.0/76.7	80/80	57.6	5250 - 6750 CFM

DCC300***(3B/3V) @ 240 / 240V – 25 Tons

MODEL	MCA ^{1,3} (3B/3V)	MOP ^{2,3} (4B /4V)	ACTUAL kW @ 240V	AIRFLOW RANGE
EHK3-31	137.8/138.4	175/175	28.8	7200 - 8500 CFM
EHK3-46	155.4/156.1	175/175	43.2	7201 - 8500 CFM
EHK3-60	164.1/164.9	175/175	57.6	7202 - 8500 CFM
EHK3-75	198.7/199.5	225/225	72	7203 - 8500 CFM

DCC300***(4B/4V) @ 480V – 25 Tons

MODEL	MCA ^{1,3} (4B/4V)	MOP ^{2,3} (4B/4V)	ACTUAL kW @ 480V	AIRFLOW RANGE
EHK4-31	55.8/56.5	70/70	28.8	7200 - 8500 CFM
EHK4-46	76.8/77.6	80/80	43.2	7201 - 8500 CFM
EHK4-60	81.1/81.9	90/90	57.6	7202 - 8500 CFM
EHK4-75	98.4/99.2	110/110	72	7203 - 8500 CFM

DCC — Heat Kit Usage

DCC240***(3B/3V) @ 208 / 240V – 20 Tons

MODEL	MCA ^{1,3}	MOP ^{2,3}	ACTUAL kW @ 240V	RECOMMENDED AIRFLOW RANGE
EHK3-31	103.9/104.1	125/125	28.8	7200 - 8500 CFM
EHK3-46	147.1/147.4	150/150	43.2	7200 - 8500 CFM
EHK3-60	155.9/156.1	175/175	57.6	7200 - 8500 CFM
EHK3-75	190.0/190.7	225/225	72	7200 - 8500 CFM

DCC240***(4B/4V) @ 480V – 20 Tons

MODEL	MCA ^{1,3}	MOP ^{2,3}	ACTUAL kW @ 480V	RECOMMENDED AIRFLOW RANGE
EHK4-31	51.3/51.5	60/60	28.8	7200 - 8500 CFM
EHK4-46	73.0/73.3	80/80	43.2	7200 - 8500 CFM
EHK4-60	77.3/77.6	90/90	57.6	7200 - 8500 CFM
EHK4-75	94.6/ 94.9	110/110	72	7200 - 8500 CFM

DCC240***(7B/7V) @575V – 20 Tons

MODEL	MCA ^{1,3}	MOP ^{2,3}	ACTUAL kW @ 575V	RECOMMENDED AIRFLOW RANGE
EHK7-31	42.5/42.6	45/45	28.8	7200 - 8500 CFM
EHK7-46	60.6/60.7	70/70	43.2	7200 - 8500 CFM
EHK7-60	64.2/64.3	70/70	57.6	7200 - 8500 CFM
EHK7-75	78.7/78.8	90/90	72	7200 - 8500 CFM

¹ Minimum Circuit Ampacity

² Maximum Overcurrent Protection (Amps)

³ If Powered Convenience Outlet option is installed, see unit Serial Plate for correct MCA and MOP values.

Note: When using electric heat kit, the single-point kit installed in the unit is needed to meet UL requirements.

DCC300***(7B/7V) @ 575V – 25 Tons

MODEL	MCA	MOP	ACTUAL kW @ 575V	AIRFLOW RANGE
EHK7-31	45.5/46.4	50/50	28.8	7200 - 8500 CFM
EHK7-46	63.6/64.5	70/70	43.2	7201 - 8500 CFM
EHK7-60	67.2/68.1	80/80	57.6	7202 - 8500 CFM
EHK7-75	81.7/82.6	90/100	72	7203 - 8500 CFM





Daikin provides innovative,
premium quality indoor climate
management solutions to
meet the changing needs of
residential, commercial and
industrial customers.

