

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

### Performance

*Indoor Unit Model No:* FCQ36PAVJU  
*Outdoor Unit Model No:* RZQ36PVJU9  
*Rated Cooling Capacity (Btu/hr):* 36000  
*Sensible Capacity (Btu/hr):* 28600  
*Max/Min Cooling Capacity (Btu/hr / kW):* databook/databook  
*Cooling Input Power (kW):* 2.76  
*SEER:* 17.5  
*Rated Heating Capacity (Btu/hr):* 40000  
*Max/Min Heating Capacity (Btu/hr / kW):* databook/databook  
*Heating Input Power (kW):* 2.76  
*Heating COP (Btu/hr / Btu/hr):* N/A  
*HSPF:* 8.4

*Indoor Unit Type:* Round Flow Cassette  
*Condensing Unit Type:* SkyAir Heat Pump  
*Rated Cooling Conditions*  
 Indoor: 80°F DB/67°F WB  
 Outdoor: 95°F DB/75°F WB  
*Rated Heating Conditions*  
 Indoor: 70°F DB/60°F WB  
 Outdoor: 47°F DB/43°F WB  
*Rated Piping Length(ft)* 25  
*Rated Height Separation(ft)* 0

### Indoor Unit Details

*Power Supply (V/Hz/Ph):* 208-230/60/1ph  
*Power Supply Connections:* L1, L2, Ground  
*Min Circuit Amps MCA (A):* 1.4  
*Max Overcurrent Amps MFA (A):* 15  
*Dimensions (HxWxD):* 11-5/16x33-1/16x33-1/16  
*Panel (HxWxD):* 2x37-3/8x37-3/8  
*Net Weight (lbs):* 55  
*Weight with Panel (lbs):* 67.2

*Airflow Rate (CFM wet coil)* 1180/910/700  
*Moisture Removal (pt/h):*  
*Gas Pipe Connection (inch):* 5/8  
*Liquid Pipe Connection (inch):* 3/8  
*Condensate Connection (inch):* 1  
*Sound Pressure Level (dBA):* 44  
*Sound Power Level (dBA):* 32  
*Static Pressure Rated/Max (inWg)* 0 / 0/0

### Condensing Unit Details

*Power Supply (V/Hz/Ph):* 208-230/60/1ph  
*Power Supply Connections:* L1, L2, Ground  
*Min. Circuit Amps MCA (A):* 27  
*Max. Overcurrent Amps MFA (A):* 30  
*Max. Starting Current MSC(A):*  
*Rated Load Amps RLA (A):* 18.6  
*Dimensions (HxWxD):* 52-15/16x35-7/16x12-5/8  
*Net Weight (lbs):* 283

*Compressor Type:* Inverter  
*Capacity Control Range (%):* 25 - 100  
*Airflow Rate (CFM):* 3740  
*Gas Pipe Connection (inch):* 5/8  
*Liquid Pipe Connection (inch):* 3/8  
*Sound Pressure Level (dBA):* 58  
*Sound Power Level (dBA):*

### System Details

*Refrigerant Type:* R-410A  
*Holding Refrigerant Charge (lbs):* 8.8  
*Additional Charge (oz/ft):* 0.036lbs/ft  
*Pre-charge Piping (Length ft):* -  
*Max. Pipe Length (Total ft):* 230 ft

*Max. Pipe Length (Vertical ft):* 164 ft  
*Cooling Operation Range (°F):* 23 - 115  
*Cooling Range w/Baffle (°F):* 0 - 115  
*Heating Operation Range (°F):* 0 - 77  
*Heating Range w/Baffle (°F):* 0 - 77


Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

## Dimensional Drawing - Indoor Unit

FCQ36PAVJU

FCQ36\_42PAVJU  
 Unit (in.)

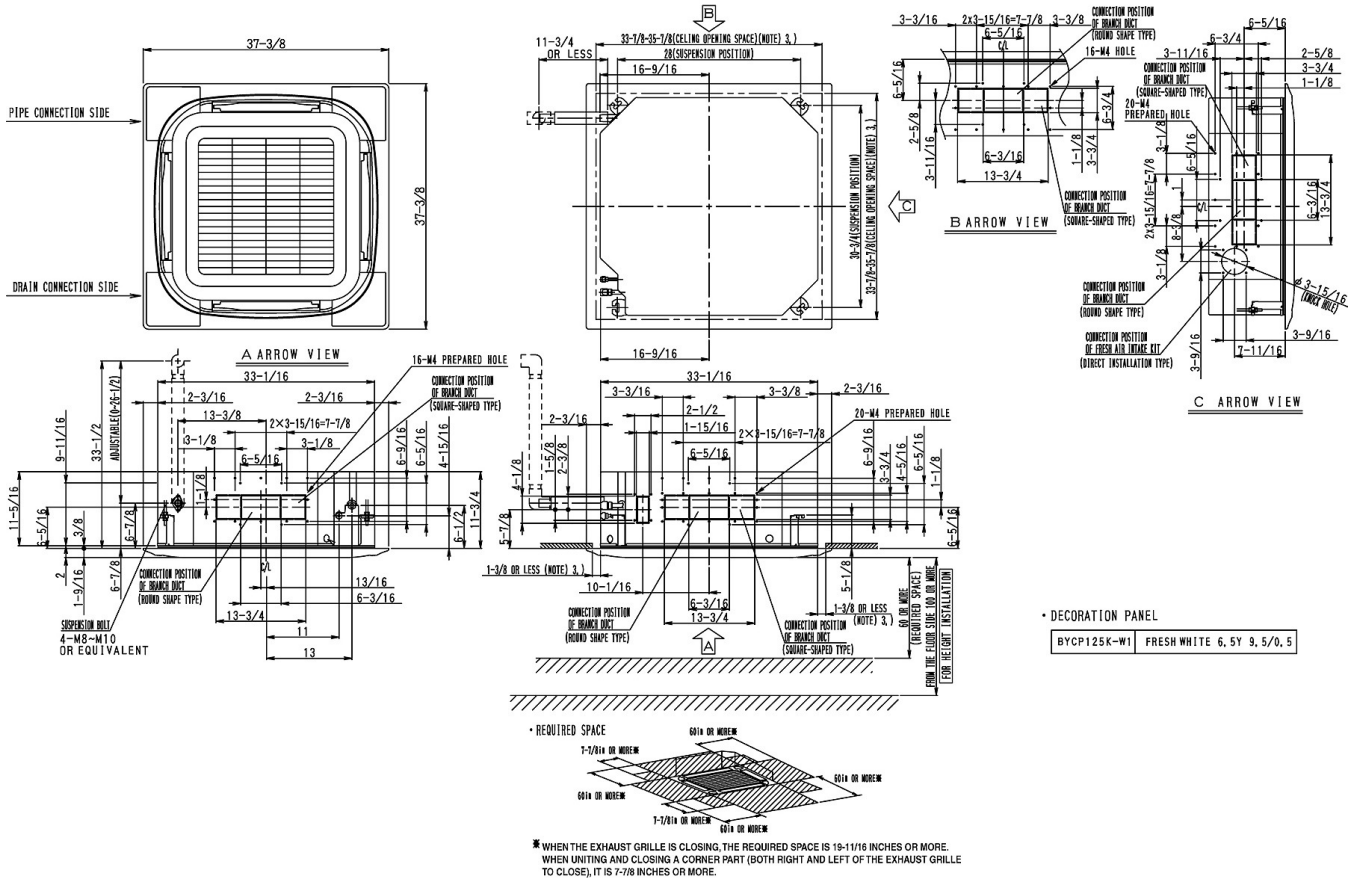


Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

**Dimensional Drawing - Condensing Unit**

RZQ36PVJU9

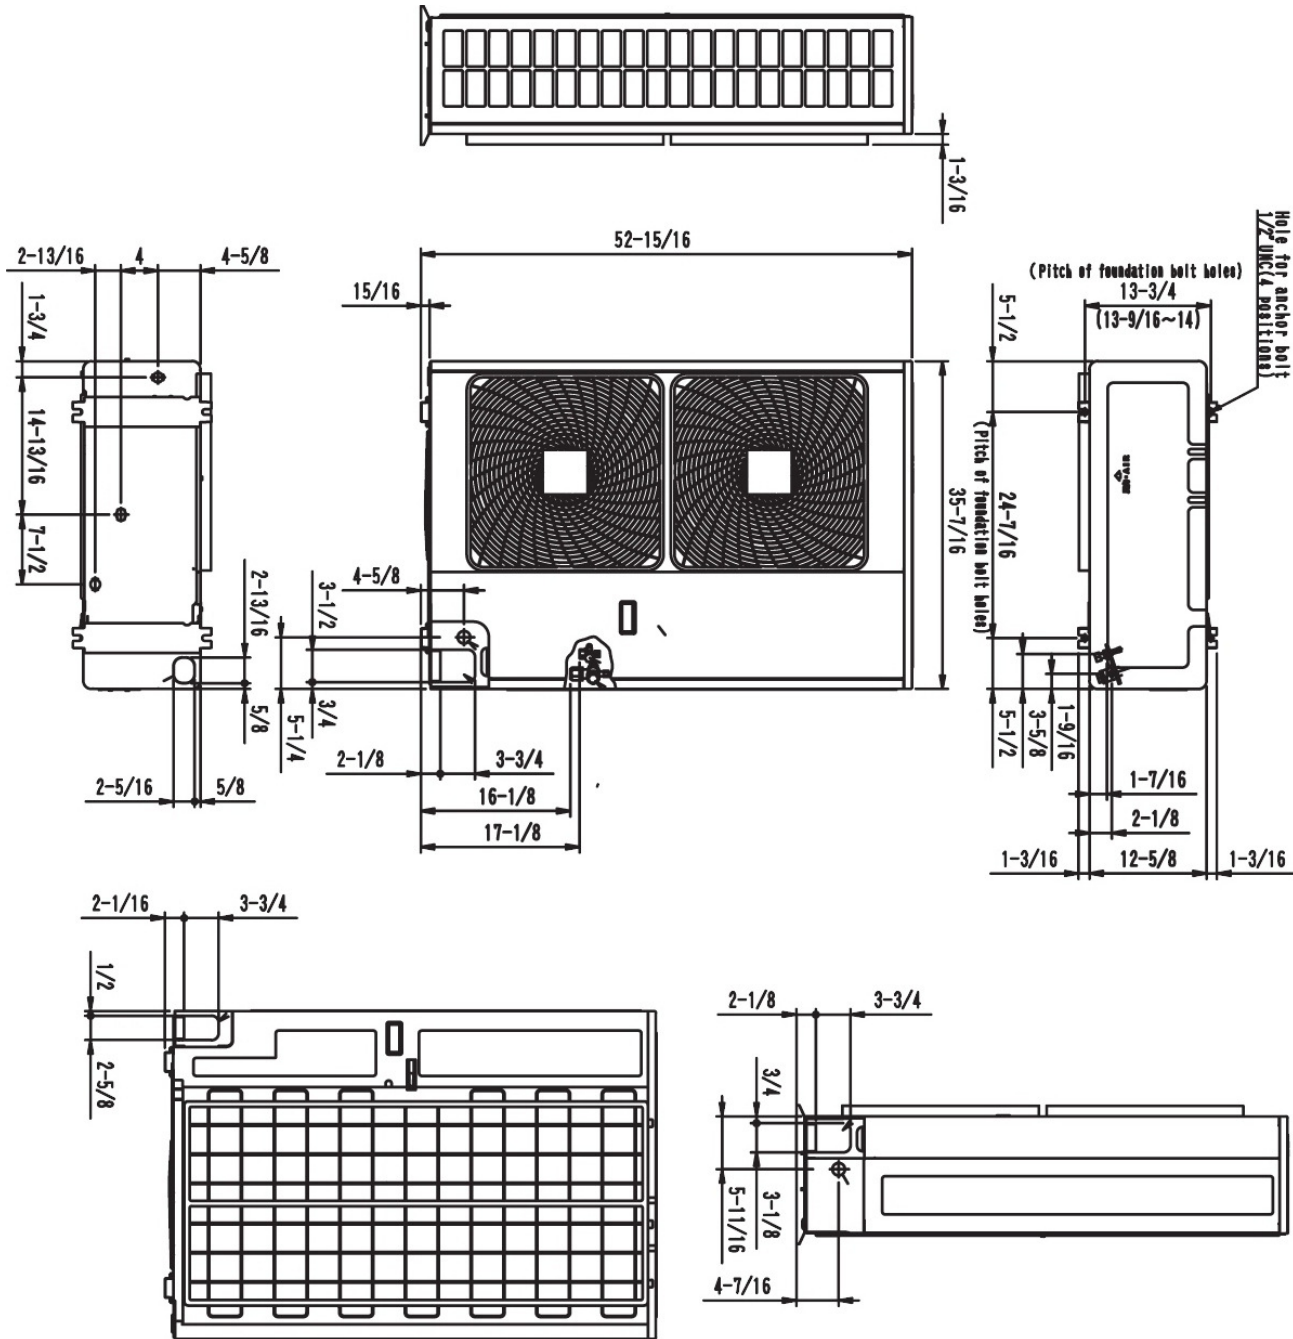

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

**FCQ36PAVJU**



**RZQ36PVJU9**



**FCQ36PAVJU**

Std U.S. Warranty: 7yrs Compressor, 5yrs Parts

**RZQ36PVJU9**

Std U.S. Warranty: 7yrs Compressor, 5yrs Parts