


| | |
|-----------|--|
| Job Name: | |
| Tag# | |



| | |
|--|------------------------------|
| Submittal Data Sheet | FTX36NVJU / RK36NMVJU |
| 3-Ton Wall Mounted Cooling Only System | |

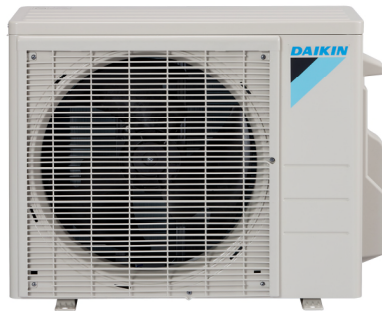

| Efficiency | |
|------------|-------|
| Cooling | |
| SEER | 15.90 |
| EER | 9.10 |

| Performance | |
|--------------------------------------|---|
| Cooling (Btu/hr) | |
| Rated (Min/Max) | 34,400 (10,200 / 34,400) |
| Sensible @ AHRI | 22,160 |
| Standard Operating Range | 50°F – 115°F |
| Extended Operating Range* | -22°F – 115°F |
| Rated Cooling Conditions: | Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB |
| *With field settings and wind baffle | |

Complete warranty details available from your local dealer or at www.daikincomfort.com. Warranty registration not required to receive the 10-Year parts limited warranty for residential or commercial installations.

| Indoor Specifications | | |
|-------------------------------|---------------------------|-----|
| Airflow Rate (cfm) | Cooling | |
| | H | M |
| | 915 | 742 |
| | L | SL |
| 572 | 512 | |
| Sound (dBA) H / M / L / SL | 54 / 47 / 40 / 37 | |
| Dimensions (H x W x D) (in) | 13-3/8 x 47-1/4 x 10-3/16 | |
| Weight (Lbs) | 38 | |

| Electrical | | |
|--|----------|----------|
| | 208/60/1 | 230/60/1 |
| System MCA | 17 | 17 |
| System MFA | 20 | 20 |
| Compressor RLA | 16.25 | 16.25 |
| Outdoor fan motor FLA | .83 | .83 |
| Outdoor fan motor W | 123 | 123 |
| Indoor fan motor FLA | .37 | .37 |
| Indoor fan motor W | 64 | 64 |
| MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A) RLA: Rated load amps (A) W: Fan motor rated output (W) | | |


| Outdoor Specifications | | |
|-----------------------------|--------------------------------|-------|
| Compressor | Hermetically Sealed Swing Type | |
| Refrigerant | R-410A | |
| Factory Charge (Lbs) | 3.64 | |
| Refrigerant Oil | PVE (FVC50K) | |
| Airflow Rate (cfm) | Cooling | |
| | H | 2,811 |
| Sound Pressure Level (dBA) | 59 | |
| Dimensions (H x W x D) (in) | 28-15/16 x 34-1/4 x 12-5/8 | |
| Weight (Lbs) | 133 | |

| Piping | |
|--|--------|
| Liquid (in) | 1/4 |
| Gas (in) | 5/8 |
| Drain (in) | 5/8 |
| Max. Interunit Piping Length (ft) | 98.4 |
| Max. Interunit Height Difference (ft) | 65.625 |
| Chargeless (ft) | 32.8 |
| Additional Charge of Refrigerant (oz/ft) | .32 |

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


FTX36NVJU Dimensional Data

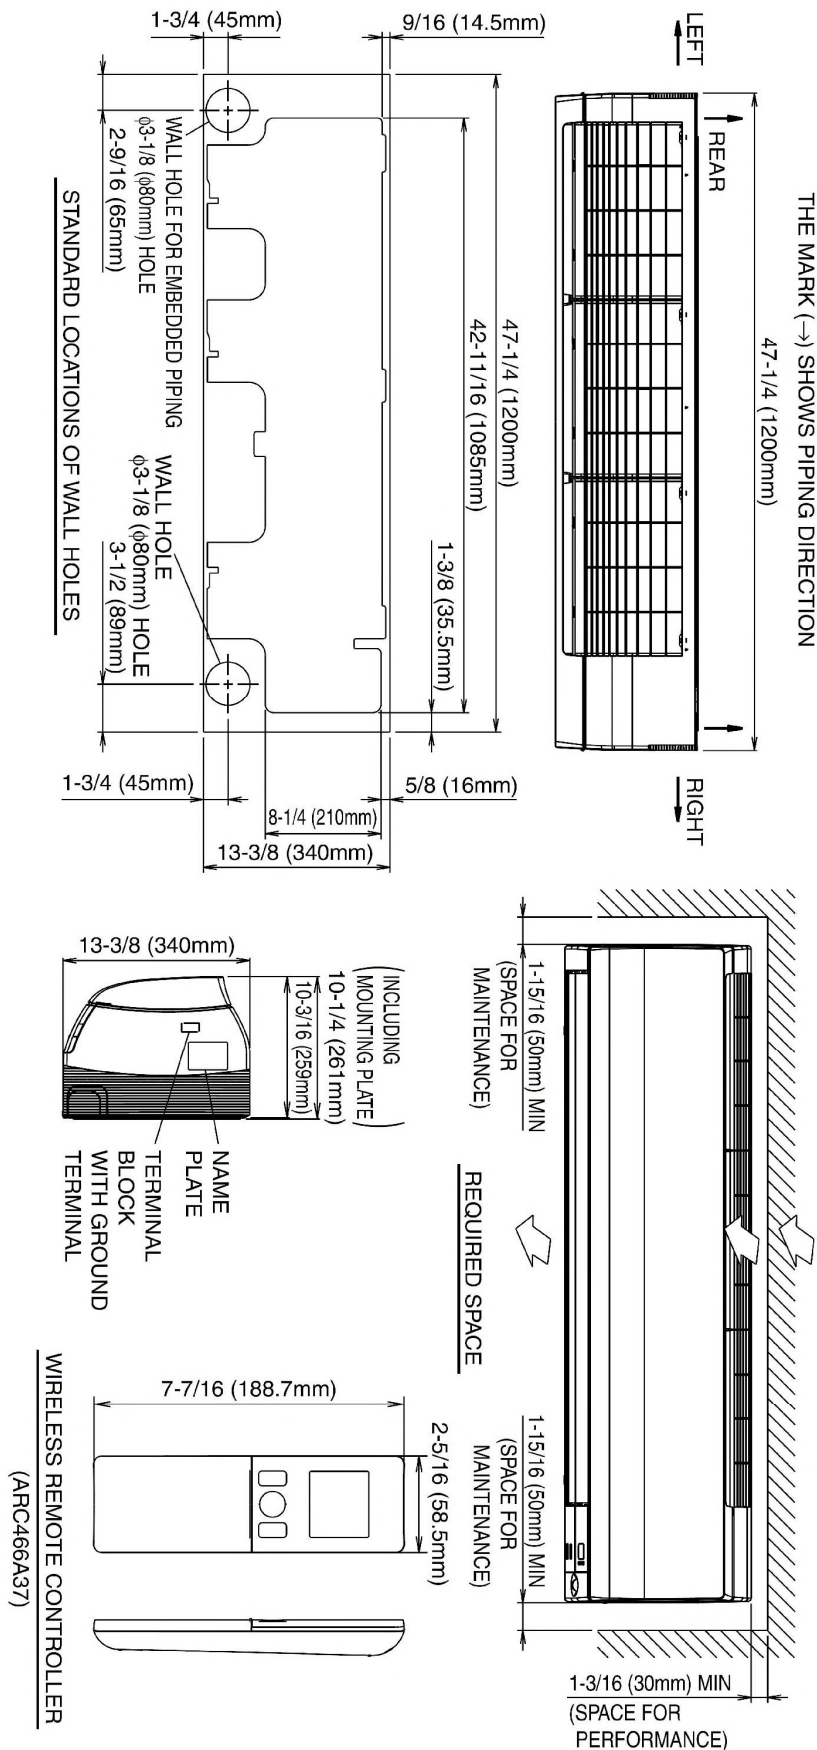

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

RK36NMVJU Dimensional Data

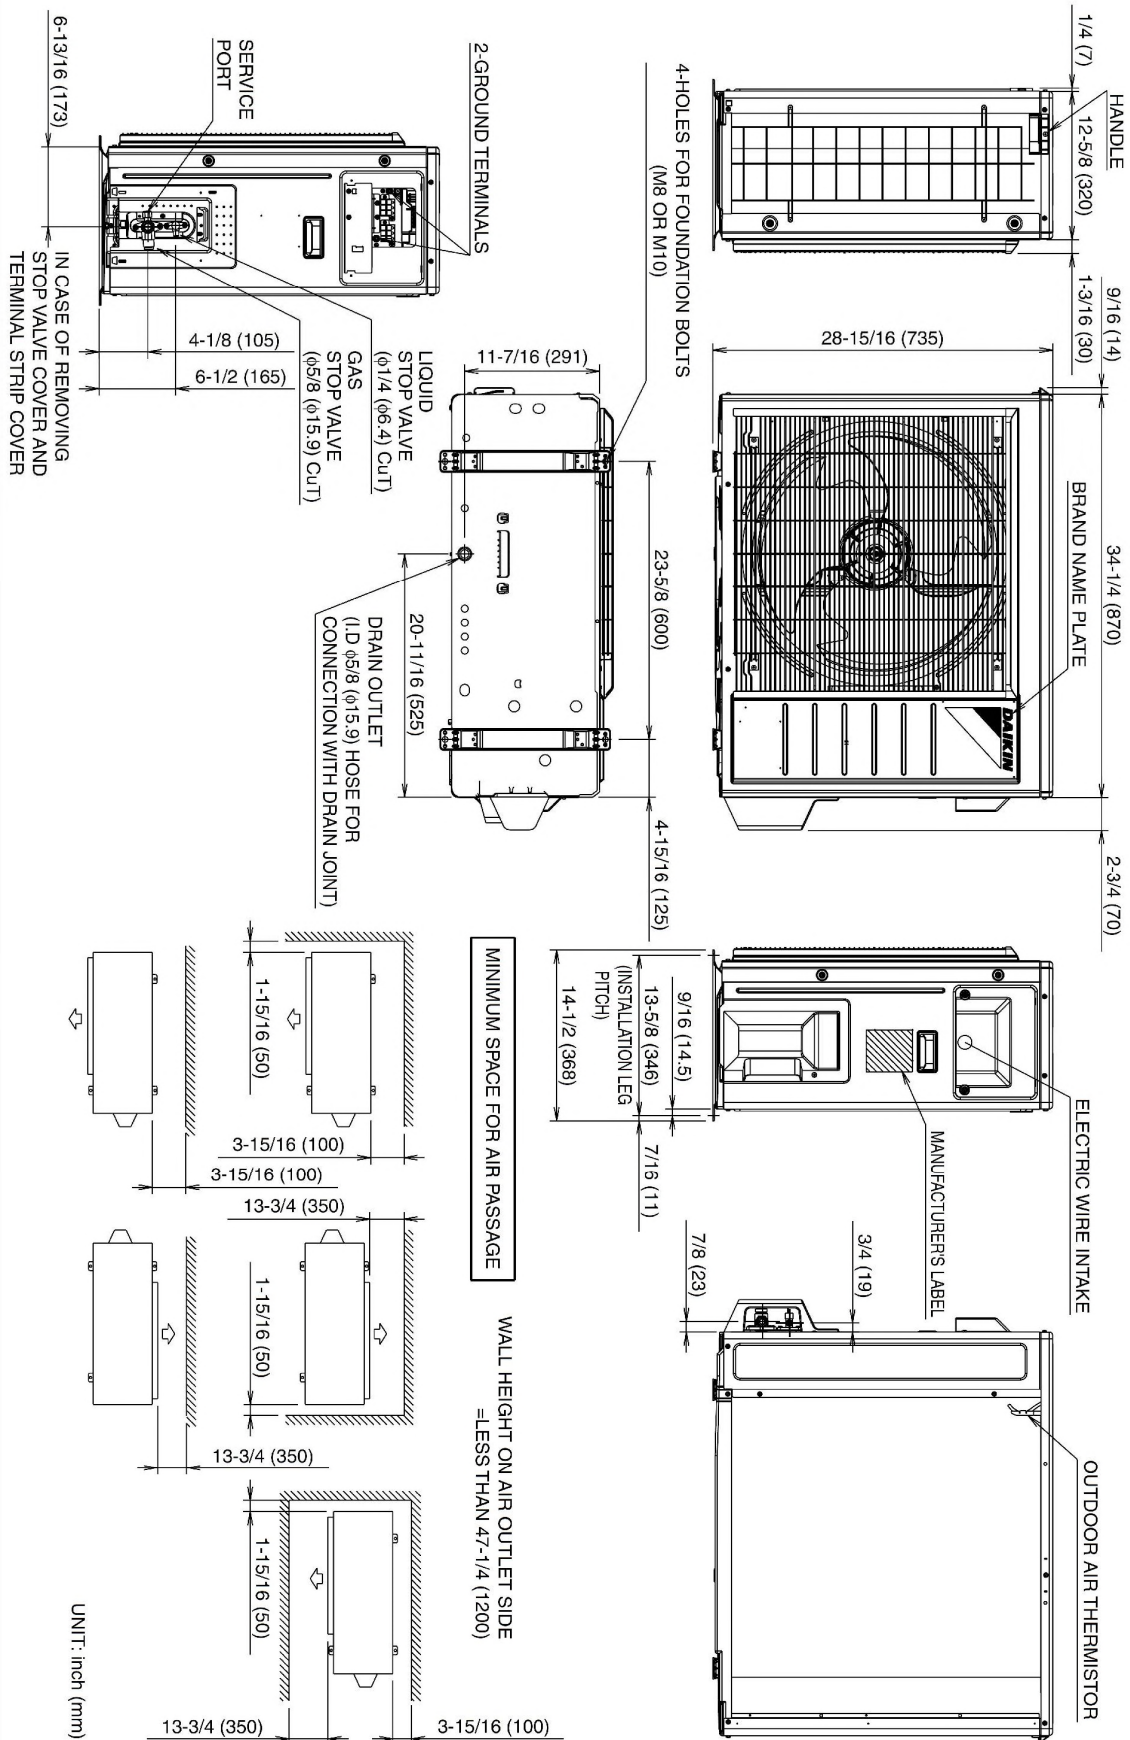

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



| Indoor Unit | | |
|-------------|--------------|--|
| Included | Part Number | Description |
| | BRP072A43 | Wireless Interface Adapter |
| | BRC944B2-A08 | Wired Remote Controller kit |
| | BRCW901A08 | Wired Remote Controller Cable – 25 ft (included in above kit) |
| | BRCW901A03 | Wired Remote Controller Cable – 10 ft |
| | DACA-TS1-1 | Daikin ENVi Intelligent Thermostat Kit |
| | DACA-CP1-1 | Inline Condensate Pump (Fits inside all Daikin wall & floor mount units) |
| | DACA-CP4-1 | External Condensate Pump |
| | KRP928BB2S | Interface Adaptor for DIII-NET |

| Outdoor Unit | | |
|--------------|-------------|---------------------------------|
| Included | Part Number | Description |
| | KPW063A4 | Air Adjustment Grille (RX & RK) |
| | KKG063A42 | Back protection wire net |