Job Name:	
Tag#	



Submittal Data Sheet

FDMQ18RVJU / RX18RMVJU

1.5-Ton Ducted Concealed Heat Pump System







Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. If product is installed in a commercial application, limited warranty period is 5 years.

Indoor Specifications

-				
	Cooling		Heating	
	Н	M	Н	М
Airflow Rate (cfm)	675	572	675	572
		Ĺ	ı	_
	473		473	
Sound (dBA)	35		35	
Dimensions (H × W × D) (in)		9-5/8 ×	39-3/8 × 31	-1/2
Airflow Inlet (H x W) (in)		5-7/8 x 33-1/4		
Weight (Lbs)			82	

Outdoor Specifications

Compressor		Hermetically	Sealed Swing Type
Refrigerant		R-410A	
Factory Charge (Lbs)		2.49	
Refrigerant Oil		PVE (FVC50K)	
Airflow Rate (cfm)		Cooling	Heating
		2,461	2,553
Sound Pressure Level (dBA)		į	54 / 55
Dimensions (H × W × D) (in)		28-15/16 × 34-1/4 × 12-5/8	
Weight (Lbs)			97

Efficiency

Cooling		Hea	ting
SEER	18.5	HSPF	10.3
EER	12.5	СОР	3.8

Performance

Cooling (Btu/hr)		
Rated (Min/Max) 17,600		
Sensible @ AHRI	14,930	
Standard Operating Range	50°F – 115°F	
Extended Operating Range*	-4°F – 115°F	

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

*With field settings and wind baffle

Heating (Btu/hr)		
1:@ 47° Rated (Min/Max) 21,600		
2: @ 17° Rated	13,600	
3: @ 5° Max	9,650	
Operating Range	5°F – 65°F	

1: Rated Heating Conditions: Indoor: 70°F DB/60°F WB

Outdoor: 47°F DB/43°F WB

2: Rated Heating Conditions: Indoor: 70°F DB/60°F WB

Outdoor: 17°F DB/15°F WB

3: Rated Heating Conditions: Indoor: 70°F DB/60°F WB

Outdoor: 5°F DB/5°F WB

Electrical

	208/60/1	230/60/1
System MCA	12.8	12.8
System MFA	15	15
Compressor RLA	10.75	10.75
Outdoor fan motor FLA	.38	.38
Outdoor fan motor W	110	110
Indoor fan motor FLA	1.22	1.22
Indoor fan motor W	230	230

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)
RLA: Rated load amps (A)
W: Fan motor rated output (W)

Piping

Liquid (in)	1/4	
Gas (in)	1/2	
Drain (in)	1	
Max. Interunit Piping Length (ft)	98.5	
Max. Interunit Height Difference (ft)	65.6	
Chargeless (ft)	32.8	
Additional Charge of Refrigerant (oz/ft)	.21	


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: May 2018 Page 1 of 4

FDMQ18RVJU Dimensional Data




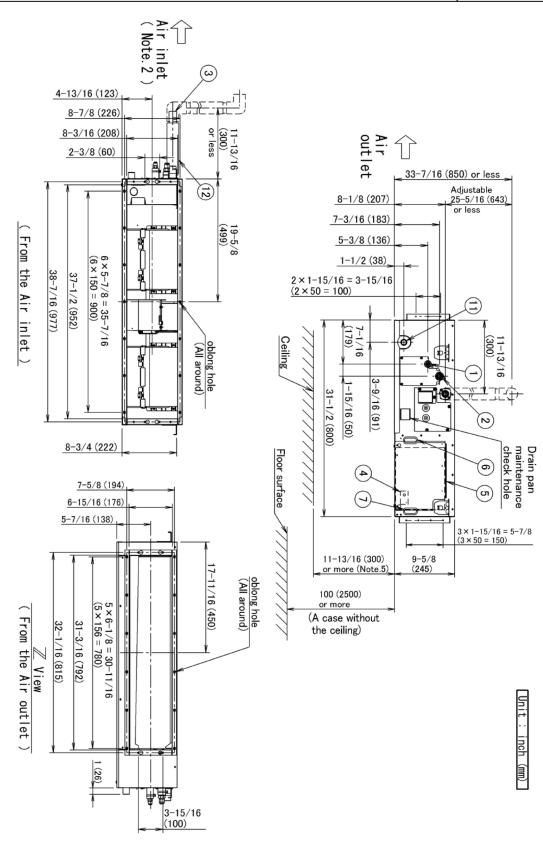

Submittal Revision Date: May 2018

RX18RMVJU Dimensional Data



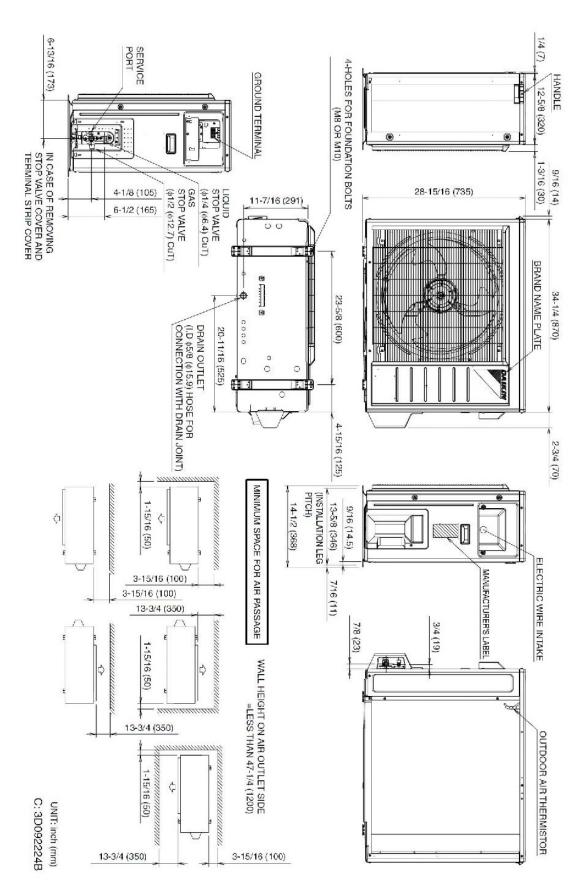

Submittal Revision Date: May 2018 Page 3 of 4




Indoor Unit – One Controller required			
Included	Included Part Number Description		
	BRC1E73	Wired Remote Controller	
KRCS01-4B Remote Sensor		Remote Sensor	
	DACA-CP2-1 Maxi Orange Condensate Pump (up to 49 ft head)		
DACA-CP3-1 Mini Condensate Pump (up to 33 ft head)		Mini Condensate Pump (up to 33 ft head)	
	KRP1C74	Wiring Adapter	

Outdoor Unit			
Included	Part Number	Description	
	DACA-WB-1	Powder-Coated Wall-Mounted Bracket	
	KEH063A4E	Drain Pan Heater	
	KKP937A4 Drain Plug for OD Unit		
	KPW063A4 Low Ambient Wind Baffle / Air Adjustment Grille (15/18 /24MBH)		
	KKG063A42	Back Protection Wire Net (15/18/24MBH)	

External Static Pressure / Airflow Chart



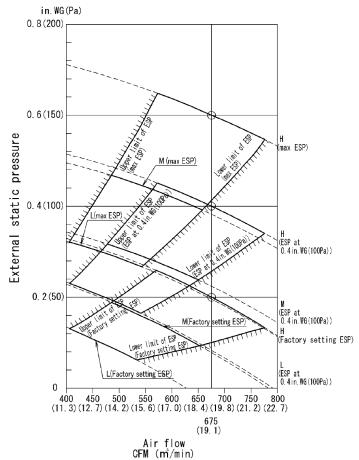

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: May 2018 Page 4 of 4