



Submittal Data Sheet

Daikin Entra R-32 Heat Pump Ductless ODU 1.5 Ton
RXC18AXVJU

FEATURES

- Operating Range - Cooling (50° - 114.8°)

BENEFITS

- 10 year limited parts warranty with online registration

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

Daikin Entra R-32 Heat Pump Ductless ODU 1.5 Ton
RXC18AXVJU

EFFICIENCY:	
COOLING:	HEATING:
SEER	HSPF
EER	COP

PERFORMANCE:			
COOLING (Btu/Hr):		HEATING (Btu/Hr):	
Rated:(Min/Max):	18,100 (6,900 / 20,000)	47° Rated:(Min/Max):	18,000 (5,800 / 22,500)
Sensible AHRI:		17° Rated:	Add MSS
Moisture Removal (Gal/Hr):	0.6	5° Max:	Add MSS
Standard Operating Range:	50°F - 115°F	Operating Range:	5°F - 65°F
Extended Operating Range:	°F - °F	47° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	17° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

ELECTRICAL			PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1		Gas Connection (in):	1/2
System MCA:	16.3		Liquid Connection (in):	1/4
System MFA:	20.0		Drain Connection (in):	
Compressor RLA:			Max. Interunit Piping Length (ft):	98.5
Outdoor fan motor FLA:	1.3		Max. Interunit Height Difference (ft):	33
Outdoor fan motor W:	55.0		Refrigerant Pre-Charged Pipe Length (ft):	33
Indoor fan motor FLA:			Additional Charge of Refrigerant (oz/ft):	0.18
Indoor fan motor W:	55.0			
MCA: Min.circuit amps	MFA: Max.fuse amps	RLA: Rated load amps		
			FLA: Full load amps	W: Rated output watts

Submittal Data Sheet


Daikin Entra R-32 Heat Pump Ductless ODU 1.5 Ton

RXC18AXVJU

INDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	1,879	Med:	
Low:		SuperLow:	
Sound Pressure (H) (dBA):	53	Sound Pressure (H) (dBA):	53
Dimensions (HxWxD) (in):	27-13/32 x 36-5/8 x 13-13/16	Net Weight (lb):	101

DIMENSIONAL DRAWING - INDOOR UNIT

Model : RXC18/24A

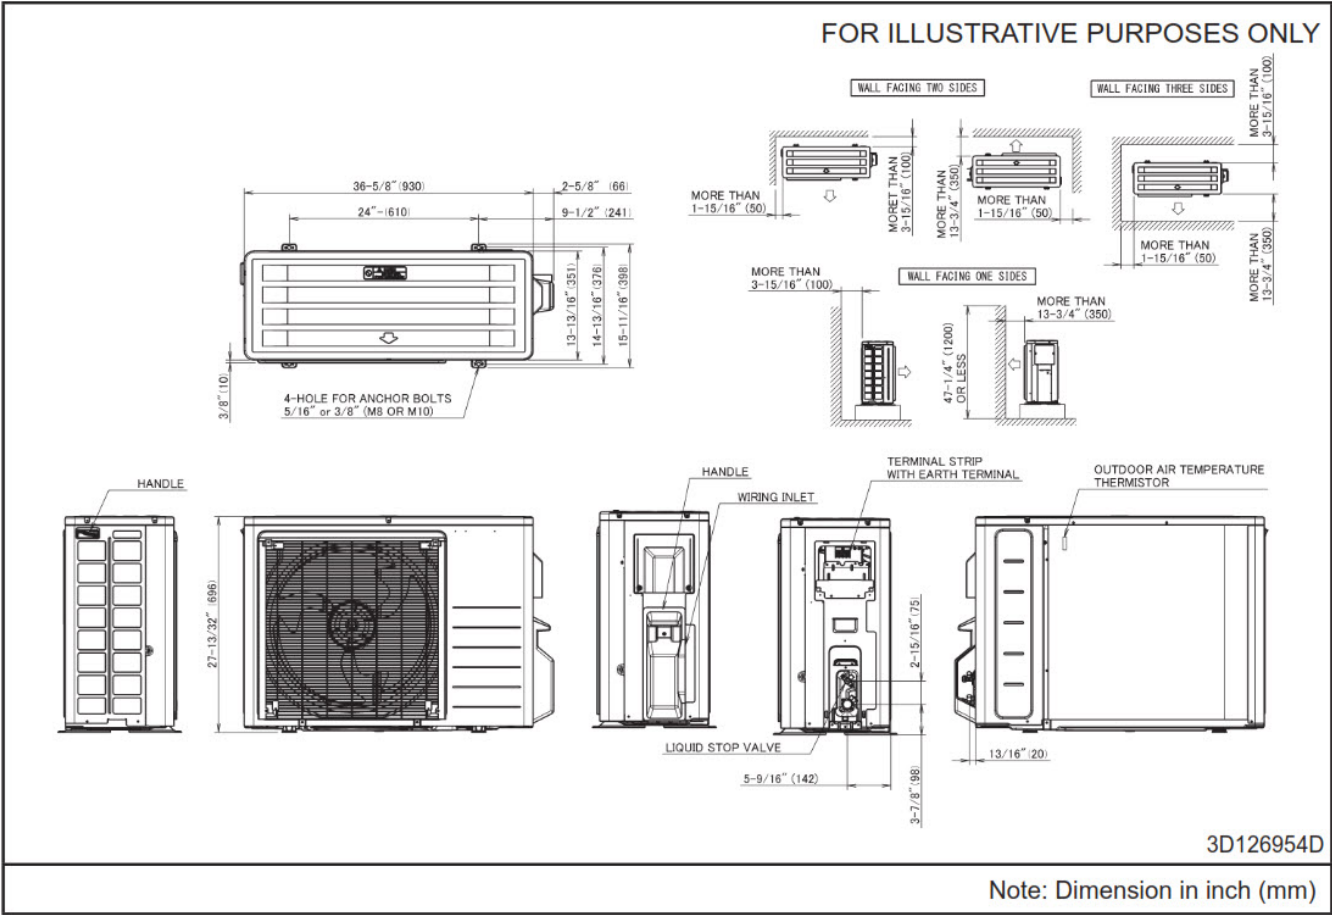


Submittal Data Sheet
Daikin Entra R-32 Heat Pump Ductless ODU 1.5 Ton
RXC18AXVJU

OUTDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	1,879	High:	1,833
SuperLow:		SuperLow:	
Compressor Stage:	Inverter	Refrigerant Type:	R-32
Refrigerant Oil:	PVE (FVC50K)		
Factory Charge (Lbs):	3.31	Sound Pressure Level (dBA):	53
Dimensions (HxWxD) (in):	27-13/32 x 36-5/8 x 13-13/16	Net Weight (lb):	101

DIMENSIONAL DRAWING - OUTDOOR UNIT

Model : RXC18/24A

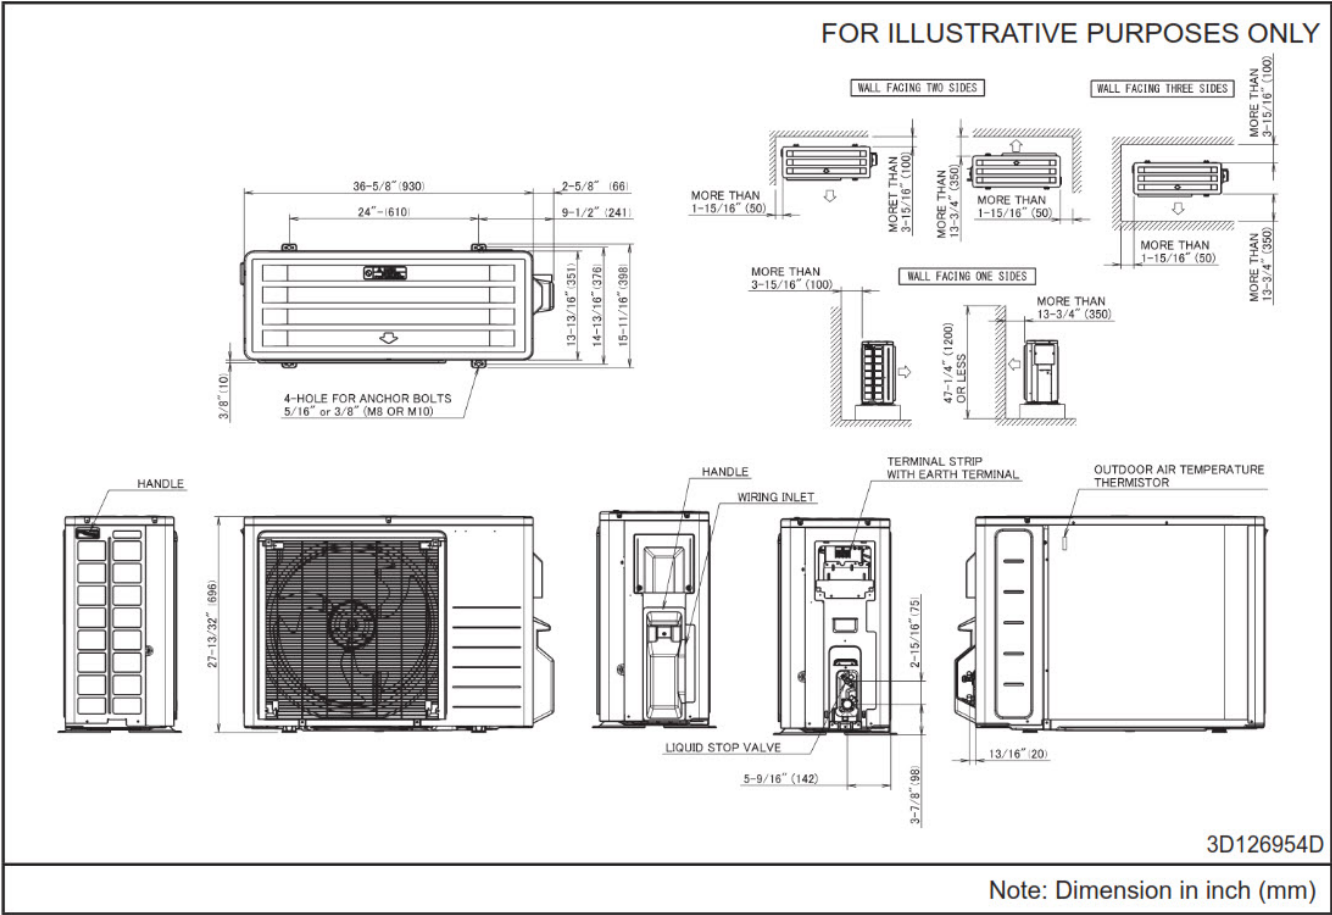



Submittal Data Sheet
Daikin Entra R-32 Heat Pump Ductless ODU 1.5 Ton
RXC18AXVJU

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
KEH063A4EA	Bml LRg Drain Pan Heater Rev A	No
KPW063B4E	Air Adjustment Grille	No