





DYN-O-STRUT™

SLOTTED STRUT

Slotted Strut is a common product used in Commercial Construction. With slotted holes at 2" centers, it allows for easy use with threaded rod and an assortment of threaded rod accessories that can engage and secure to the strut.

Dyn-O-Strut from Duro Dyne is cold-formed to size from low carbon strip steel making its strength ideal for use on a variety of commercial applications. It is Pre Galvanized ASTM A-653 Grade 33 Steel Sheet Zinc Coated by Hot Dip Process. This finish will protect from scratches, field cuts etc. through an anodic sacrificial process. This type of coating is suitable for extended exposure in dry or mildly corrosive atmospheres.

The bottom of Dyn-O-Strut features 1-1/8" X 9/16" (28.58 X 14.29) slots on 2" (50.8) centers. These pre-punched slots eliminate the need for precise field measuring for hole locations.

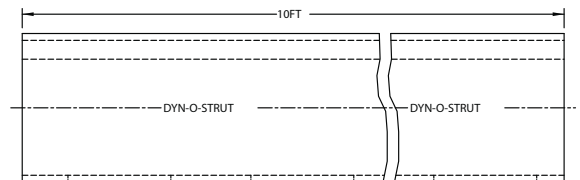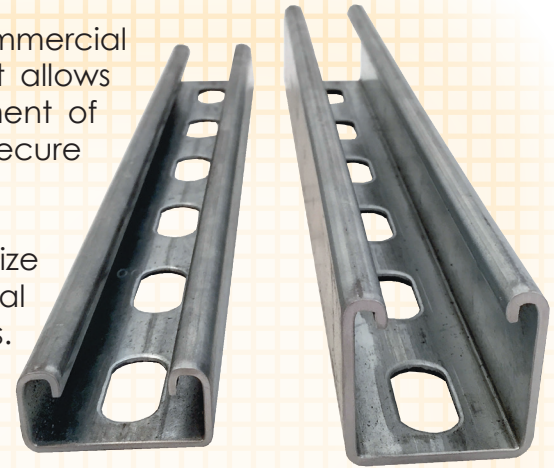

Duro Dyne offers Dyn-O-Strut in 14 gauge in both Deep and Shallow style channels. The Deep channel is also offered in 12 gauge. Dyn-O-Strut is sold in 10 ft. or 20 ft. lengths and 500 ft. or 1000 ft. per bundle.

FEATURES:

- ***PRE-GALVANIZED ASTM A-653 GRADE 33 STEEL SHEET ZINC COATED BY HOT DIP PROCESS.**
- **Cold-formed to size from low carbon strip steel**
- **Slotted at 2" centers**

Ordering Information

Item #	Code	Description	Length	Quantity
13045	DS1210-158	1-5/8x1-5/8x10ft 12 GA Slotted Dyn-O-Strut - Deep	10'	500ft/Bundle
13049	DS1410-158	1-5/8x1-5/8x10ft 14 GA Slotted Dyn-O-Strut - Deep	10'	500ft/Bundle
13047	DS1410-1316	13/16x1-5/8x10ft 14 GA Slotted Dyn-O-Strut - Shallow	10'	500ft/Bundle
13125	DS1220-158	1-5/8x1-5/8x20ft 12 GA Slotted Dyn-O-Strut - Deep	20'	500ft/Bundle
13126	DS1420-158	1-5/8x1-5/8x20ft 14 GA Slotted Dyn-O-Strut - Deep	20'	500ft/Bundle
13127	DS1420-1316	13/16x1-5/8x20ft 14 GA Slotted Dyn-O-Strut - Shallow	20'	1000ft/Bundle

Duro Dyne East Division, Bay Shore, NY
Duro Dyne Midwest Division, Hamilton, OH
Duro Dyne West Division, Fontana, CA
Duro Dyne Canada, Lachine, Quebec, Canada

www.durodyne.com E-mail: durodyne@durodyne.com

631-249-9000 Fax: 631-249-8346
513-870-6000 Fax: 513-870-6005
562-926-1774 Fax: 562-926-5778
514-422-9760 Fax: 514-636-0328



© Duro Dyne Corp.
Printed in USA 2/19
BF013424



DYN-O-STRUT™

ACCESSORIES

Slotted Strut is a common product used in Commercial Construction. With slotted holes at 2" centers, it allows for easy use with threaded rod and an assortment of threaded rod accessories that can engage and secure to the strut.



3/8in Square Washer




Strut Nut without Spring



Strut Nut with Spring



90 Degree Strut
Bracket

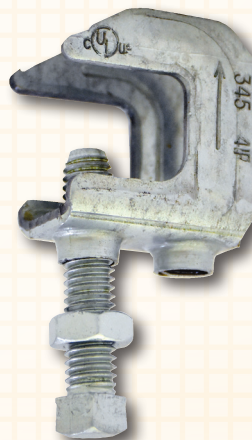

Stamped Beam
Clamp

Ordering Information

Item #	Code	Description	Quantity
13101	SW38	3/8in Square Washer	100
13102	S38	Strut Nut without Spring	100
13103	SN38	Strut Nut with Spring	100
13104	SB90	90 Degree Strut Bracket	50
13105	SBCSN38	3/8in Stamped Small Mouth Beam Clamp	100

Duro Dyne East Division, Bay Shore, NY
Duro Dyne Midwest Division, Hamilton, OH
Duro Dyne West Division, Fontana, CA
Duro Dyne Canada, Lachine, Quebec, Canada
www.durodyne.com E-mail: durodyne@durodyne.com

631-249-9000 Fax: 631-249-8346
513-870-6000 Fax: 513-870-6005
562-926-1774 Fax: 562-926-5778
514-422-9760 Fax: 514-636-0328



© Duro Dyne Corp.
Printed in USA 2/19
BF013424