



CONDUIT

Conduit is used to support duct sizes over 48" or smaller duct in high pressure applications. Duro Dyne offers conduit in 1/2" and 3/4" sizes in 10 ft. lengths.


- Complies with ANSI C80.3
- Hot Dip Galvanized Conduit




WORKS GREAT WITH:



DYN-O-LOCS®



DYN-O-CLAW™



ROD LOC INSERTION MACHINE

See reverse side for more details.

Ordering Information

Item #	Code	Description	Outside Diameter	Wall Thickness	Weight (full skid)	Length
21099	MC1210	1/2in Thin Wall Conduit - 10ft Lengths	0.706"	0.042"	1,430 lbs.	10'
21100	MC3410	3/4in Thin Wall Conduit - 10ft Lengths	0.922"	0.049"	2,175 lbs.	10'

Duro Dyne East Division, Bay Shore, NY **631-249-9000** **Fax: 631-249-8346**
Duro Dyne Midwest Division, Hamilton, OH **513-870-6000** **Fax: 513-870-6005**
Duro Dyne West Division, Fontana, CA **562-926-1774** **Fax: 562-926-5778**
Duro Dyne Canada, Lachine, Quebec, Canada **514-422-9760** **Fax: 514-636-0328**
www.durodyne.com E-mail: durodyne@durodyne.com



DYN-O-LOCS®

Dyn-O-Locs insert into the hollow ends of conduit to provide a means of attaching the conduit to the duct.

Dyn-O-Locs are available for use with 1/2" or 3/4" Conduit.

Large self-sealing washer

Long bolt for easier installation

We put the washer on the bolt, so you don't have to!

The Dyn-O-Loc Tool aids installation and assures accurate spacing.


Installed lock is pull tested to withstand over 1900 lbs.

Item #	Code	Description	Quantity
21097	DOMRL12	1/2" Dyn-O-Loc*	250/Box
21098	DOMRL34	3/4" Dyn-O-Loc*	250/Box
21208	DOMRL12-100	1/2" Dyn-O-Loc	100/Box
21209	DOMRL34-100	3/4" Dyn-O-Loc	100/Box
21076	RLT	Dyn-O-Loc Tool	1 each

*Dyn-O-Locs included with Rod Loc Insertion Machine.

DYN-O-CLAW™

The Dyn-O-Claw is designed to join conduits for more stability and to eliminate their vibration in the duct. They are available for both 1/2" or 3/4" conduit.

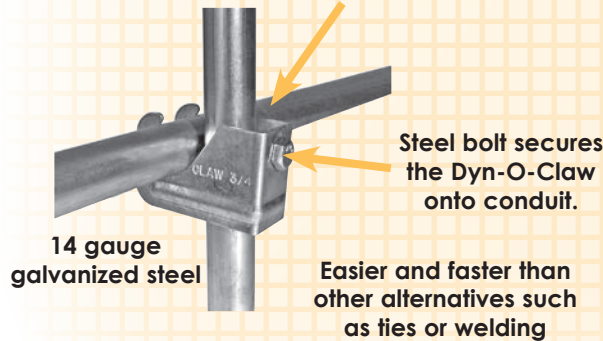


Item #	Code	Description	Pkg.	Weight (lbs.)
21088	DOMDOC12	1/2" Dyn-O-Claw	250/Box	40
21089	DOMDOC34	3/4" Dyn-O-Claw	200/Box	40

ROD LOC INSERTION MACHINE

The Rod-Loc Insertion Machine offers contractors a fast and convenient way to set up rod locks and conduit. It runs off of a standard 110 volt outlet and a 70 PSI minimum air supply. Simply place either 3/4" or 1/2" conduit in the cradle and a rod loc on each side, and by the flip of a switch the air cylinder inserts a rod lock on both ends simultaneously of hollow conduit at the perfect inset spacing, eliminating the old timely hammer in method!

Item #	Code	Description
43009	WVDL1234	Rod-Loc Insertion Machine

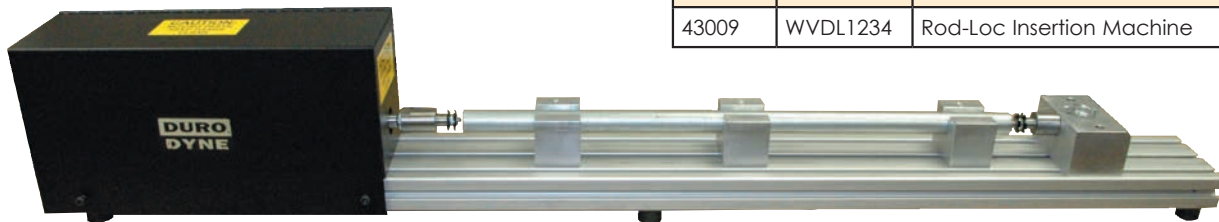

Not shown: includes 48" long extension to accommodate up to 6' conduit

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346
Duro Dyne Midwest Division, Hamilton, OH 513-870-6000 Fax: 513-870-6005
Duro Dyne West Division, Fontana, CA 562-926-1774 Fax: 562-926-5778
Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com

**DURO
DYNE**®
© Duro Dyne Corp.
Printed in USA 11/16
BF013423