



Air Conditioning & Heating

COOLING CAPACITY:
18,000 TO 56,800 BTU/H

Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency Copeland® scroll compressor
- High- and low-pressure switches
- High-quality compressor sound blanket
- 850 RPM condenser fan motor
- Factory-installed liquid-line filter drier
- Service valves with sweat connections and gauge ports
- Copper tube/enhanced aluminum fin coil
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



SSX14
1½- TO 5-TON HIGH-EFFICIENCY
SPLIT SYSTEM AIR CONDITIONERS
UP TO 15 SEER

Contents

Nomenclature 2

Product Specifications 3

Expanded Cooling Data 4

AHRI Ratings..... 20

Dimensions 38

Wiring Diagram..... 39

Accessories 40



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home) and the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

NOMENCLATURE

	S	S	X	14	036	1	A	A		
	1	2	3	4,5	6,7,8	9	10	11		
Brand	G Goodman® (Standard Feature Set Models)		S Goodman® (High Feature Set Models)							Engineering * Minor Revision
Product Category	S Split System							Engineering * Major Revision		
Unit Type	C Condenser R-22		X Condenser R-410A		H Heat Pump R-22		Z Heat Pump R-410A			
Efficiency	13 13 SEER		14 14 SEER		16 16 SEER					
							Electrical			
							1 208/230 V, 1 Phase, 60 Hz			
							2 220/240 V, 1 Phase, 50 Hz			
							3 208/230 V, 3 Phase, 60 Hz			
							4 460 V, 3 Phase, 60 Hz			
							5 380/415 V, 3 Phase, 50 Hz			
							Nominal Capacity			
							018 1½ Tons			
							024 2 Tons			
							030 2½ Tons			
							036 3 Tons			
							042 3½ Tons			
							048 4 Tons			
							060 5 Tons			
							090 7½ tons			
							120 10 Tons			
							* Neither used for order entry or inventory management.			



SPECIFICATIONS

	SSX14 0181B	SSX14 0241B	SSX14 0301B	SSX14 0361B	SSX14 0421C	SSX14 0481B	SSX14 0601A
COOLING CAPACITY							
Nominal Cooling (BTU/h)	18,000	24,000	28,800	34,600	40,000	45,000	56,800
Decibels	71	71	72	73	73	74	75
COMPRESSOR							
RLA	9.0	13.4	12.8	14.1	16.7	19.9	26.4
LRA	48.0	58.3	64	77	79.0	109	134
CONDENSER FAN MOTOR							
Horsepower (RPM)	1/6	1/12	1/6	1/6	1/6	¼	¼
FLA	1.10	0.60	1.10	1.10	1.10	1.50	1.60
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Line Size ("O.D.)	¾"	¾"	¾"	¾"	1⅝"	1⅝"	1⅝"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Valve Size ("O.D.)	¾"	¾"	¾"	¾"	⅞"	⅞"	⅞"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	70	88	93	98	137	147	268
Shipped with Orifice Size	0.052	0.055	0.065	0.068	0.070	0.078	0.088
ELECTRICAL DATA							
Voltage-Hz	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60
Minimum Circuit Ampacity ²	12.4	17.5	17.1	18.7	22.0	26.4	34.6
Max. Overcurrent Protection ³	20	30	30	30	35	45	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"
EQUIPMENT WEIGHT (LBS)	161	166	139	194	253	279	290
SHIP WEIGHT (LBS)	178	183	157	212	271	301	312

¹ Tested and rated in accordance with ARI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply ⅜" to 1⅝" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of ⅜" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT, NOT THE INDOOR COIL.

EXPANDED COOLING DATA — SSX140181BA / CA*F3636*6C*

IDB	Airflow	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	16.7	17.3	18.9	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.5	16.1	17.6	-	14.7	15.3	16.7	-	13.7	14.2	15.5	-
	S/T	0.67	0.56	0.38	-	0.69	0.58	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.76	0.64	0.44	-
	ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-
	kW	2.00	2.03	2.08	-	2.11	2.14	2.19	-	2.20	2.24	2.29	-	2.29	2.33	2.38	-	2.36	2.40	2.46	-	2.42	2.46	2.53	-
	Amps	4.5	4.6	4.7	-	4.8	4.9	5.1	-	5.2	5.3	5.5	-	5.5	5.7	5.8	-	5.9	6.0	6.2	-	6.2	6.3	6.5	-
	Hi PR	208	224	237	-	234	252	266	-	266	286	302	-	303	326	344	-	341	367	387	-	377	405	428	-
	Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-
	MBh	18.1	18.7	20.5	-	17.7	18.3	20.0	-	17.2	17.9	19.6	-	16.8	17.4	19.1	-	16.0	16.6	18.1	-	14.8	15.3	16.8	-
	S/T	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.79	0.66	0.46	-
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-
	kW	2.03	2.07	2.11	-	2.15	2.18	2.23	-	2.25	2.28	2.34	-	2.33	2.37	2.43	-	2.41	2.45	2.51	-	2.47	2.51	2.58	-
	Amps	4.6	4.7	4.8	-	4.9	5.0	5.2	-	5.3	5.4	5.6	-	5.7	5.8	6.0	-	6.0	6.2	6.4	-	6.4	6.5	6.7	-
Hi PR	215	231	244	-	241	260	274	-	274	295	312	-	312	336	355	-	351	378	399	-	388	418	441	-	
Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-	
MBh	18.6	19.3	21.1	-	18.2	18.8	20.7	-	17.8	18.4	20.2	-	17.3	18.0	19.7	-	16.5	17.1	18.7	-	15.2	15.8	17.3	-	
S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	
ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
kW	2.05	2.08	2.12	-	2.16	2.19	2.25	-	2.26	2.30	2.35	-	2.35	2.39	2.45	-	2.42	2.46	2.53	-	2.49	2.53	2.59	-	
Amps	4.6	4.7	4.9	-	5.0	5.1	5.2	-	5.4	5.5	5.7	-	5.7	5.9	6.0	-	6.1	6.2	6.4	-	6.4	6.6	6.8	-	
Hi PR	217	234	247	-	244	262	277	-	277	298	315	-	315	340	359	-	355	382	403	-	392	422	446	-	
Lo PR	109	116	126	-	115	122	133	-	119	127	139	-	125	133	146	-	131	140	152	-	136	144	158	-	
75	MBh	17.0	17.5	18.9	20.3	16.6	17.1	18.5	19.8	16.2	16.7	18.0	19.4	15.8	16.3	17.6	18.9	15.0	15.4	16.7	17.9	13.9	14.3	15.5	16.6
	S/T	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.87	0.78	0.59	0.38
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11
	kW	2.01	2.04	2.09	2.14	2.12	2.15	2.20	2.26	2.22	2.25	2.31	2.37	2.30	2.34	2.40	2.46	2.38	2.42	2.48	2.54	2.44	2.48	2.54	2.61
	Amps	4.5	4.6	4.7	4.9	4.8	4.9	5.1	5.3	5.2	5.4	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.1	6.2	6.5	6.3	6.4	6.6	6.8
	Hi PR	211	227	239	250	236	254	269	280	269	289	305	319	306	329	348	363	344	371	391	408	380	409	432	451
	Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	122	129	141	150	127	136	148	158	132	140	153	163
	MBh	18.4	18.9	20.5	22.0	18.0	18.5	20.0	21.5	17.5	18.0	19.5	21.0	17.1	17.6	19.1	20.5	16.2	16.7	18.1	19.4	15.0	15.5	16.8	18.0
	S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.81	0.61	0.39
	ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	22	20	17	12	21	19	16	11
	kW	2.05	2.08	2.12	2.17	2.16	2.19	2.25	2.30	2.26	2.30	2.35	2.41	2.35	2.39	2.45	2.51	2.42	2.46	2.53	2.59	2.49	2.53	2.60	2.66
	Amps	4.6	4.7	4.9	5.0	5.0	5.1	5.2	5.4	5.4	5.5	5.7	5.9	5.7	5.9	6.0	6.3	6.1	6.2	6.4	6.7	6.4	6.6	6.8	7.0
Hi PR	217	234	247	257	244	262	277	289	277	298	315	328	316	340	359	374	355	382	403	421	392	422	446	465	
Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	145	158	168	
MBh	18.9	19.5	21.1	22.6	18.5	19.0	20.6	22.1	18.1	18.6	20.1	21.6	17.6	18.1	19.6	21.1	16.7	17.2	18.6	20.0	15.5	16.0	17.3	18.5	
S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.94	0.84	0.64	0.41	
ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
kW	2.06	2.09	2.14	2.19	2.17	2.21	2.26	2.31	2.27	2.31	2.37	2.43	2.36	2.40	2.46	2.53	2.44	2.48	2.54	2.61	2.50	2.55	2.61	2.68	
Amps	4.7	4.8	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.6	6.8	7.1	
Hi PR	219	236	249	260	246	265	280	292	280	301	318	332	319	343	362	378	359	386	407	425	396	426	450	470	
Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	

kW = Total system power
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — SSX140181BA / CA*F3636*6C* (CONT.)

IDB	Airflow	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	17.3	17.6	18.9	20.2	16.9	17.2	18.4	19.7	16.5	16.8	18.0	19.2	16.1	16.4	17.5	18.7	15.3	15.6	16.7	17.8	14.1	14.4	15.4	16.5
	S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.69	0.52	0.94	0.89	0.72	0.54	0.95	0.89	0.73	0.54
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	26	25	21	17	25	24	21	17	24	23	20	16
	kW	2.02	2.05	2.10	2.15	2.13	2.17	2.22	2.27	2.23	2.27	2.32	2.38	2.32	2.36	2.41	2.48	2.39	2.43	2.49	2.56	2.45	2.50	2.56	2.63
	Amps	4.5	4.6	4.8	4.9	4.9	5.0	5.1	5.3	5.3	5.4	5.6	5.8	5.6	5.8	5.9	6.2	6.0	6.1	6.3	6.5	6.3	6.5	6.7	6.9
	Hi PR	213	229	242	252	239	257	271	283	271	292	308	322	309	333	351	366	348	374	395	412	384	414	437	455
	Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165
	MBh	18.7	19.1	20.4	21.8	18.3	18.7	20.0	21.3	17.8	18.2	19.5	20.8	17.4	17.8	19.0	20.3	16.5	16.9	18.1	19.3	15.3	15.6	16.7	17.9
	S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56
	ΔT	25	24	21	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	15
kW	2.06	2.09	2.14	2.19	2.17	2.21	2.26	2.31	2.27	2.31	2.37	2.43	2.36	2.40	2.46	2.53	2.44	2.48	2.54	2.61	2.50	2.55	2.61	2.68	
Amps	4.7	4.8	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.6	6.9	7.1	
Hi PR	219	236	249	260	246	265	280	292	280	301	318	332	319	343	362	378	359	386	407	425	396	426	450	470	
Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	
MBh	19.3	19.7	21.0	22.5	18.8	19.2	20.5	22.0	18.4	18.8	20.1	21.4	17.9	18.3	19.6	20.9	17.0	17.4	18.6	19.9	15.8	16.1	17.2	18.4	
S/T	0.90	0.85	0.69	0.51	0.93	0.88	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.75	0.56	1.00	0.96	0.78	0.59	1.00	0.97	0.79	0.59	
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15	
kW	2.07	2.10	2.15	2.20	2.19	2.22	2.27	2.33	2.29	2.32	2.38	2.44	2.38	2.42	2.48	2.54	2.45	2.50	2.56	2.63	2.52	2.56	2.63	2.70	
Amps	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.5	5.6	5.8	6.0	5.8	6.0	6.2	6.4	6.2	6.3	6.5	6.8	6.5	6.7	6.9	7.2	
Hi PR	221	238	252	263	249	267	282	295	283	304	321	335	322	346	366	382	362	390	412	429	400	431	455	474	
Lo PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	148	158	134	143	156	166	139	147	161	171	
85	MBh	17.6	17.9	18.8	20.0	17.2	17.5	18.3	19.5	16.8	17.1	17.9	19.1	16.3	16.7	17.4	18.6	15.5	15.8	16.6	17.7	14.4	14.7	15.4	16.4
	S/T	0.87	0.84	0.76	0.61	0.90	0.87	0.78	0.64	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.96	0.87	0.71
	ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	27	26	25	22	25	25	23	20
	kW	2.03	2.06	2.11	2.16	2.15	2.18	2.23	2.29	2.24	2.28	2.34	2.40	2.33	2.37	2.43	2.49	2.41	2.45	2.51	2.57	2.47	2.51	2.58	2.65
	Amps	4.6	4.7	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	6.4	6.5	6.7	7.0
	Hi PR	215	231	244	255	241	259	274	286	274	295	312	325	312	336	355	370	351	378	399	416	388	418	441	460
	Lo PR	108	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166
	MBh	19.0	19.4	20.3	21.7	18.6	19.0	19.9	21.2	18.2	18.5	19.4	20.7	17.7	18.1	18.9	20.2	16.8	17.1	18.0	19.2	15.6	15.9	16.6	17.7
	S/T	0.90	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.90	0.73
	ΔT	26	26	24	21	27	26	25	21	27	26	25	21	27	26	25	22	26	26	25	21	24	24	23	20
kW	2.07	2.10	2.15	2.20	2.19	2.22	2.27	2.33	2.29	2.32	2.38	2.44	2.38	2.42	2.48	2.54	2.45	2.50	2.56	2.63	2.52	2.56	2.63	2.70	
Amps	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.5	5.6	5.8	6.0	5.8	6.0	6.2	6.4	6.2	6.3	6.5	6.8	6.5	6.7	6.9	7.2	
Hi PR	221	238	252	263	249	267	282	295	283	304	321	335	322	346	366	382	362	390	412	429	400	431	455	474	
Lo PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	148	158	134	143	156	166	139	147	161	171	
MBh	19.6	20.0	20.9	22.3	19.2	19.5	20.4	21.8	18.7	19.1	20.0	21.3	18.2	18.6	19.5	20.8	17.3	17.7	18.5	19.7	16.1	16.4	17.1	18.3	
S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.77	
ΔT	25	25	23	20	26	25	24	21	25	25	24	21	25	25	24	21	24	24	24	20	22	22	22	19	
kW	2.08	2.11	2.16	2.21	2.20	2.23	2.29	2.34	2.30	2.34	2.40	2.46	2.39	2.43	2.49	2.56	2.47	2.51	2.58	2.64	2.54	2.58	2.65	2.72	
Amps	4.7	4.8	5.0	5.2	5.1	5.2	5.4	5.6	5.5	5.6	5.8	6.0	5.9	6.0	6.2	6.4	6.2	6.4	6.6	6.8	6.6	6.8	7.0	7.2	
Hi PR	224	241	254	265	251	270	285	298	285	307	324	338	325	350	369	385	366	394	416	434	404	435	459	479	
Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX140241BA / CA*F3636*6C*

IDB	Airflow	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	23.4	24.2	26.5	-	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.7	22.5	24.7	-	20.7	21.4	23.5	-	19.1	19.8	21.7	-
	S/T	0.65	0.54	0.37	-	0.67	0.56	0.39	-	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.74	0.61	0.43	-	0.74	0.62	0.43	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-
	kW	1.60	1.63	1.68	-	1.72	1.75	1.81	-	1.82	1.86	1.92	-	1.91	1.95	2.02	-	1.99	2.03	2.10	-	2.06	2.10	2.17	-
	Amps	5.8	6.0	6.2	-	6.3	6.5	6.7	-	6.9	7.0	7.3	-	7.3	7.5	7.8	-	7.8	8.0	8.3	-	8.3	8.5	8.8	-
	Hi PR	233	250	264	-	261	281	297	-	297	320	337	-	338	364	384	-	380	409	432	-	420	452	478	-
	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-
	MBh	23.6	24.5	26.8	-	23.1	23.9	26.2	-	22.5	23.3	25.6	-	22.0	22.8	24.9	-	20.9	21.6	23.7	-	19.3	20.0	21.9	-
	S/T	0.65	0.54	0.38	-	0.68	0.56	0.39	-	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.75	0.63	0.43	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-
	kW	1.62	1.65	1.70	-	1.74	1.77	1.83	-	1.84	1.88	1.94	-	1.93	1.97	2.04	-	2.01	2.06	2.12	-	2.08	2.13	2.19	-
	Amps	5.9	6.1	6.2	-	6.4	6.5	6.8	-	6.9	7.1	7.3	-	7.4	7.6	7.9	-	7.9	8.1	8.4	-	8.4	8.6	8.9	-
Hi PR	236	254	268	-	265	285	301	-	301	324	342	-	343	369	389	-	385	415	438	-	426	458	484	-	
Lo PR	106	113	123	-	112	119	130	-	117	124	136	-	123	130	142	-	128	137	149	-	133	141	154	-	
MBh	24.4	25.3	27.7	-	23.9	24.7	27.1	-	23.3	24.1	26.5	-	22.7	23.6	25.8	-	21.6	22.4	24.5	-	20.0	20.7	22.7	-	
S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	
ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-	
kW	1.64	1.67	1.72	-	1.76	1.80	1.85	-	1.87	1.91	1.97	-	1.96	2.01	2.07	-	2.04	2.09	2.16	-	2.11	2.16	2.23	-	
Amps	6.0	6.2	6.4	-	6.5	6.7	6.9	-	7.1	7.2	7.5	-	7.6	7.7	8.0	-	8.0	8.2	8.5	-	8.5	8.7	9.0	-	
Hi PR	240	259	273	-	270	290	307	-	307	330	349	-	349	376	397	-	393	423	447	-	434	467	494	-	
Lo PR	108	115	126	-	115	122	133	-	119	127	138	-	125	133	145	-	131	139	152	-	136	144	157	-	
75	MBh	23.8	24.5	26.5	28.4	23.2	23.9	25.9	27.8	22.7	23.3	25.3	27.1	22.1	22.8	24.6	26.4	21.0	21.6	23.4	25.1	19.5	20.0	21.7	23.3
	S/T	0.73	0.66	0.50	0.32	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.84	0.75	0.57	0.37
	ΔT	23	21	17	12	23	21	17	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11
	kW	1.61	1.64	1.69	1.75	1.73	1.77	1.82	1.88	1.84	1.87	1.93	2.00	1.93	1.97	2.03	2.10	2.01	2.05	2.12	2.19	2.08	2.12	2.19	2.26
	Amps	5.9	6.0	6.2	6.5	6.4	6.5	6.7	7.0	6.9	7.1	7.3	7.6	7.4	7.6	7.8	8.1	7.9	8.1	8.3	8.7	8.3	8.5	8.8	9.2
	Hi PR	235	253	267	279	264	284	300	313	300	323	341	356	342	368	388	405	384	414	437	456	425	457	483	503
	Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	158	133	141	154	164
	MBh	24.0	24.7	26.8	28.7	23.4	24.1	26.1	28.0	22.9	23.6	25.5	27.4	22.3	23.0	24.9	26.7	21.2	21.8	23.6	25.4	19.6	20.2	21.9	23.5
	S/T	0.74	0.66	0.50	0.32	0.77	0.69	0.52	0.33	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.76	0.57	0.37	0.85	0.76	0.58	0.37
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11
	kW	1.63	1.66	1.71	1.77	1.75	1.79	1.84	1.90	1.86	1.89	1.95	2.02	1.95	1.99	2.05	2.12	2.03	2.07	2.14	2.21	2.10	2.14	2.21	2.29
	Amps	6.0	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.4	8.8	8.4	8.7	8.9	9.3
Hi PR	238	256	271	282	267	288	304	317	304	327	345	360	346	372	393	410	389	419	442	462	430	463	489	510	
Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	161	134	143	156	166	
MBh	24.8	25.6	27.7	29.7	24.3	25.0	27.0	29.0	23.7	24.4	26.4	28.3	23.1	23.8	25.8	27.6	22.0	22.6	24.5	26.3	20.3	20.9	22.7	24.3	
S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	19	17	14	10	
kW	1.65	1.69	1.74	1.79	1.78	1.81	1.87	1.93	1.88	1.92	1.99	2.05	1.98	2.02	2.09	2.16	2.06	2.11	2.17	2.25	2.13	2.18	2.25	2.32	
Amps	6.1	6.2	6.4	6.7	6.6	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	
Hi PR	243	261	276	288	273	293	310	323	310	334	352	367	353	380	401	418	397	427	451	471	439	472	499	520	
Lo PR	110	117	127	135	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX140241BA / CA*F3636*6C* (CONT.)

IDB	Airflow	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
700	MBh	24.2	24.7	26.4	28.2	23.6	24.1	25.8	27.6	23.1	23.6	25.2	26.9	22.5	23.0	24.6	26.3	21.4	21.8	23.3	24.9	19.8	20.2	21.6	23.1
	S/T	0.81	0.76	0.61	0.46	0.83	0.78	0.64	0.48	0.86	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.92	0.87	0.71	0.53
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16
	kW	1.62	1.66	1.71	1.76	1.74	1.78	1.84	1.89	1.85	1.89	1.95	2.01	1.94	1.99	2.05	2.12	2.02	2.07	2.13	2.20	2.09	2.14	2.21	2.28
	Amps	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.3
80	Hi PR	237	255	270	281	266	287	303	316	303	326	344	359	345	371	392	409	388	418	441	460	429	462	487	508
	Lo PR	107	114	124	132	113	120	131	140	118	125	137	145	123	131	143	153	129	138	150	160	134	142	155	166
	MBh	24.4	25.0	26.7	28.5	23.9	24.4	26.1	27.8	23.3	23.8	25.4	27.2	22.7	23.2	24.8	26.5	21.6	22.1	23.6	25.2	20.0	20.4	21.8	23.3
	S/T	0.81	0.76	0.62	0.46	0.84	0.79	0.64	0.48	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.93	0.88	0.71	0.53
	ΔT	25	24	21	17	26	24	21	17	26	24	21	17	26	25	21	17	25	24	21	17	24	23	20	16
900	kW	1.64	1.67	1.73	1.78	1.76	1.80	1.86	1.91	1.87	1.91	1.97	2.03	1.96	2.01	2.07	2.14	2.05	2.09	2.16	2.23	2.11	2.16	2.23	2.31
	Amps	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.1	7.1	7.2	7.5	7.8	7.6	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.4
	Hi PR	241	259	273	285	270	290	307	320	307	330	349	364	350	376	397	414	393	423	447	466	435	468	494	515
	Lo PR	108	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	139	152	162	136	144	158	168
	MBh	25.3	25.8	27.6	29.5	24.7	25.2	27.0	28.8	24.1	24.6	26.3	28.1	23.5	24.0	25.7	27.5	22.3	22.8	24.4	26.1	20.7	21.2	22.6	24.2

700	MBh	24.6	25.1	26.3	28.0	24.0	24.5	25.7	27.4	23.5	23.9	25.1	26.7	22.9	23.3	24.4	26.1	21.7	22.2	23.2	24.8	20.1	20.5	21.5	22.9
	S/T	0.84	0.81	0.73	0.60	0.87	0.84	0.76	0.62	0.90	0.87	0.78	0.63	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.97	0.93	0.84	0.68
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	26	22	26	25	24	21
	kW	1.64	1.67	1.72	1.77	1.76	1.79	1.85	1.91	1.87	1.90	1.96	2.03	1.96	2.00	2.07	2.13	2.04	2.08	2.15	2.22	2.11	2.16	2.23	2.30
	Amps	6.0	6.1	6.3	6.6	6.5	6.6	6.9	7.1	7.0	7.2	7.5	7.7	7.5	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.3
725	Hi PR	240	258	272	284	269	290	306	319	306	329	348	363	349	375	396	413	392	422	446	465	433	466	492	513
	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167
	MBh	24.9	25.3	26.5	28.3	24.3	24.7	25.9	27.7	23.7	24.2	25.3	27.0	23.1	23.6	24.7	26.3	22.0	22.4	23.5	25.0	20.3	20.7	21.7	23.2
	S/T	0.85	0.82	0.74	0.60	0.88	0.85	0.77	0.62	0.91	0.87	0.79	0.64	0.94	0.90	0.81	0.66	0.97	0.94	0.85	0.69	0.98	0.94	0.85	0.69
	ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	27	27	25	22	25	25	23	20
900	kW	1.65	1.69	1.74	1.79	1.78	1.81	1.87	1.93	1.88	1.92	1.99	2.05	1.98	2.02	2.09	2.16	2.06	2.11	2.17	2.25	2.13	2.18	2.25	2.32
	Amps	6.1	6.2	6.4	6.7	6.6	6.7	6.9	7.2	7.1	7.3	7.6	7.8	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5
	Hi PR	243	261	276	288	273	293	310	323	310	334	352	367	353	380	401	419	397	428	451	471	439	472	499	520
	Lo PR	110	117	127	136	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169
	MBh	25.7	26.2	27.5	29.3	25.1	25.6	26.8	28.6	24.5	25.0	26.2	27.9	23.9	24.4	25.5	27.3	22.7	23.2	24.3	25.9	21.1	21.5	22.5	24.0

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX140301BA / CA*F3642*6C*

IDB	Airflow	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	875	MBh	25.3	26.2	28.7	-	24.7	25.6	28.1	-	24.1	25.0	27.4	-	23.5	24.4	26.7	-	22.3	23.2	25.4	-	20.7	21.5	23.5	-	
		S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.79	0.66	0.45	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	1000	kW	1.92	1.96	2.01	-	2.05	2.09	2.15	-	2.17	2.21	2.27	-	2.27	2.31	2.38	-	2.35	2.40	2.47	-	2.43	2.47	2.55	-	
		Amps	6.8	6.9	7.1	-	7.3	7.5	7.7	-	7.9	8.1	8.3	-	8.4	8.6	8.9	-	8.9	9.1	9.4	-	9.4	9.7	10.0	-	
		Hi PR	217	234	247	-	244	262	277	-	277	298	315	-	316	340	359	-	355	382	404	-	393	423	446	-	
	1125	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	148	-	131	140	153	-	
		MBh	27.4	28.4	31.1	-	26.8	27.7	30.4	-	26.1	27.1	29.7	-	25.5	26.4	28.9	-	24.2	25.1	27.5	-	22.4	23.2	25.5	-	
		S/T	0.71	0.59	0.41	-	0.74	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-	
	75	875	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
			kW	1.94	1.97	2.03	2.09	2.07	2.11	2.17	2.23	2.18	2.23	2.29	2.36	2.28	2.33	2.40	2.47	2.37	2.42	2.49	2.57	2.44	2.49	2.57	2.65
			Amps	6.8	7.0	7.2	7.5	7.4	7.5	7.8	8.0	8.0	8.2	8.4	8.7	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.9	9.5	9.8	10.1	10.5
1000		Hi PR	220	236	249	260	246	265	280	292	280	301	318	332	319	343	363	378	359	386	408	425	397	427	451	470	
		Lo PR	106	113	123	131	112	119	130	139	117	124	135	144	123	130	142	152	128	137	149	159	133	141	154	164	
		MBh	27.9	28.7	31.1	33.3	27.2	28.0	30.3	32.6	26.6	27.4	29.6	31.8	25.9	26.7	28.9	31.0	24.6	25.4	27.4	29.5	22.8	23.5	25.4	27.3	
1125		S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	
		kW	1.98	2.02	2.07	2.13	2.11	2.15	2.22	2.28	2.23	2.28	2.34	2.41	2.34	2.38	2.45	2.53	2.43	2.47	2.55	2.63	2.50	2.55	2.63	2.71	
75		Amps	7.0	7.2	7.4	7.7	7.6	7.7	8.0	8.3	8.2	8.4	8.6	9.0	8.7	8.9	9.2	9.6	9.3	9.5	9.8	10.2	9.8	10.0	10.4	10.7	
		Hi PR	226	244	257	268	254	273	289	301	289	311	328	342	329	354	374	390	370	398	421	439	409	440	465	485	
		Lo PR	110	117	127	135	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169	
70	875	MBh	28.7	29.5	32.0	34.3	28.0	28.9	31.2	33.5	27.4	28.2	30.5	32.7	26.7	27.5	29.8	31.9	25.4	26.1	28.3	30.3	23.5	24.2	26.2	28.1	
		S/T	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42	
		ΔT	20	18	15	10	20	18	15	10	20	19	15	10	20	19	15	11	20	18	15	10	19	17	14	10	
1000	kW	1.99	2.03	2.09	2.15	2.13	2.17	2.23	2.30	2.25	2.29	2.36	2.43	2.35	2.40	2.47	2.55	2.44	2.49	2.57	2.65	2.52	2.57	2.65	2.73		
	Amps	7.1	7.2	7.5	7.7	7.6	7.8	8.0	8.3	8.3	8.4	8.7	9.0	8.8	9.0	9.3	9.6	9.3	9.6	9.9	10.2	9.9	10.1	10.5	10.8		
	Hi PR	229	246	260	271	257	276	291	304	292	314	331	346	332	358	378	394	374	402	425	443	413	444	469	489		
1125	Lo PR	111	118	128	137	117	124	136	145	121	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171		
	MBh	28.2	29.3	32.0	-	27.6	28.6	31.3	-	26.9	27.9	30.6	-	26.3	27.2	29.8	-	24.9	25.8	28.3	-	23.1	23.9	26.2	-		
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-		
75	875	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-	
		kW	1.98	2.02	2.07	-	2.11	2.15	2.22	-	2.23	2.28	2.34	-	2.34	2.38	2.45	-	2.42	2.47	2.55	-	2.50	2.55	2.63	-	
		Amps	7.0	7.2	7.4	-	7.6	7.7	8.0	-	8.2	8.4	8.6	-	8.7	8.9	9.2	-	9.3	9.5	9.8	-	9.8	10.0	10.4	-	
1000	Hi PR	226	244	257	-	254	273	289	-	289	311	328	-	329	354	374	-	370	398	420	-	409	440	465	-		
	Lo PR	110	116	127	-	116	123	134	-	120	128	140	-	126	134	147	-	132	141	154	-	137	146	159	-		
	MBh	28.2	29.3	32.0	-	27.6	28.6	31.3	-	26.9	27.9	30.6	-	26.3	27.2	29.8	-	24.9	25.8	28.3	-	23.1	23.9	26.2	-		
1125	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-		
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-		
	kW	1.98	2.02	2.07	-	2.11	2.15	2.22	-	2.23	2.28	2.34	-	2.34	2.38	2.45	-	2.42	2.47	2.55	-	2.50	2.55	2.63	-		
75	875	Amps	7.0	7.2	7.4	-	7.6	7.7	8.0	-	8.2	8.4	8.6	-	8.7	8.9	9.2	-	9.3	9.5	9.8	-	9.8	10.0	10.4	-	
		Hi PR	226	244	257	-	254	273	289	-	289	311	328	-	329	354	374	-	370	398	420	-	409	440	465	-	
		Lo PR	110	116	127	-	116	123	134	-	120	128	140	-	126	134	147	-	132	141	154	-	137	146	159	-	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX140301BA / CA*F3642*6C* (CONT.)

Table with columns for IDB, Airflow, and various temperature points (65°F, 75°F, 85°F, 95°F, 105°F, 115°F) for models 80, 875, and 1125.

Table with columns for IDB, Airflow, and various temperature points (75°F, 85°F, 95°F, 105°F, 115°F) for models 85, 875, and 1125.

kW = Total system power
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — SSX140361A* / CA*F3642C6A* / .067 ORIFICE

IDB	Airflow	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1300	MBh	33.9	35.1	38.5	-	33.1	34.3	37.6	-	32.3	33.5	36.7	-	31.5	32.7	35.8	-	30.0	31.1	34.0	-	27.8	28.8	31.5	-
		S/T	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-	
	kW	2.40	2.45	2.52	-	2.57	2.62	2.70	-	2.72	2.77	2.85	-	2.85	2.91	2.99	-	2.96	3.02	3.11	-	3.05	3.12	3.22	-	
	Amps	8.4	8.6	8.9	-	9.1	9.3	9.6	-	9.9	10.1	10.4	-	10.5	10.8	11.1	-	11.2	11.4	11.8	-	11.8	12.1	12.5	-	
	Lo PR	241	260	263	-	273	293	298	-	310	334	338	-	354	380	386	-	382	411	416	-	453	487	493	-	
70	1150	MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.6	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	26.9	27.9	30.6	-
		S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.79	0.66	0.45	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	
	kW	2.38	2.43	2.50	-	2.55	2.60	2.68	-	2.70	2.75	2.83	-	2.83	2.88	2.97	-	2.94	3.00	3.09	-	3.03	3.09	3.19	-	
	Amps	8.4	8.6	8.8	-	9.0	9.2	9.5	-	9.8	10.0	10.3	-	10.4	10.7	11.0	-	11.1	11.3	11.7	-	11.7	12.0	12.4	-	
	Lo PR	239	257	261	-	270	291	295	-	307	330	335	-	350	376	382	-	378	406	412	-	448	482	489	-	
70	1000	MBh	30.4	31.5	34.5	-	29.7	30.8	33.7	-	29.0	30.0	32.9	-	28.3	29.3	32.1	-	26.9	27.8	30.5	-	24.9	25.8	28.2	-
		S/T	0.66	0.55	0.38	-	0.68	0.57	0.40	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.76	0.63	0.44	-
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	
	kW	2.37	2.41	2.48	-	2.53	2.58	2.66	-	2.68	2.73	2.81	-	2.80	2.86	2.95	-	2.91	2.97	3.06	-	3.01	3.07	3.16	-	
	Amps	8.3	8.5	8.7	-	8.9	9.1	9.4	-	9.7	9.9	10.2	-	10.3	10.6	10.9	-	11.0	11.2	11.6	-	11.6	11.9	12.3	-	
	Lo PR	237	254	258	-	268	288	292	-	304	327	332	-	347	373	378	-	374	402	408	-	444	477	484	-	
75	1300	MBh	34.5	35.5	38.4	41.2	33.7	34.7	37.5	40.3	32.9	33.8	36.6	39.3	32.1	33.0	35.7	38.4	30.5	31.4	34.0	36.4	28.2	29.1	31.5	33.8
		S/T	0.81	0.73	0.55	0.35	0.84	0.76	0.57	0.37	0.87	0.77	0.59	0.38	0.89	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41
	ΔT	20	18	15	10	20	19	15	10	20	19	15	10	20	19	15	11	20	18	15	10	19	17	14	10	
	kW	2.40	2.45	2.52	2.59	2.57	2.62	2.70	2.78	2.72	2.77	2.85	2.94	2.85	2.91	2.99	3.09	2.96	3.02	3.11	3.21	3.05	3.12	3.22	3.32	
	Amps	8.4	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.9	10.1	10.4	10.8	10.5	10.8	11.1	11.5	11.2	11.4	11.8	12.2	11.8	12.1	12.5	13.0	
	Lo PR	241	260	263	269	273	293	298	304	310	334	338	346	354	380	386	394	382	411	416	426	453	487	493	504	
75	1150	MBh	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.9	35.6	38.2	31.1	32.1	34.7	37.2	29.6	30.5	33.0	35.4	27.4	28.2	30.5	32.8
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.39	0.89	0.80	0.60	0.39
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10	
	kW	2.38	2.43	2.50	2.57	2.55	2.60	2.68	2.76	2.70	2.75	2.83	2.92	2.83	2.88	2.97	3.06	2.94	3.00	3.09	3.19	3.03	3.09	3.19	3.29	
	Amps	8.4	8.6	8.8	9.1	9.0	9.2	9.5	9.9	9.8	10.0	10.3	10.7	10.4	10.7	11.0	11.4	11.1	11.3	11.7	12.1	11.7	12.0	12.4	12.8	
	Lo PR	239	257	261	266	270	291	295	301	307	330	335	343	350	376	382	390	378	406	412	421	448	482	489	499	
75	1000	MBh	30.9	31.8	34.4	37.0	30.2	31.1	33.6	36.1	29.5	30.3	32.8	35.2	28.7	29.6	32.0	34.4	27.3	28.1	30.4	32.7	25.3	26.0	28.2	30.3
		S/T	0.75	0.67	0.51	0.33	0.78	0.69	0.53	0.34	0.80	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.86	0.77	0.58	0.37
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
	kW	2.37	2.41	2.48	2.55	2.53	2.58	2.66	2.74	2.68	2.73	2.81	2.90	2.80	2.86	2.95	3.04	2.91	2.97	3.06	3.16	3.01	3.07	3.16	3.27	
	Amps	8.3	8.5	8.7	9.1	8.9	9.1	9.4	9.8	9.7	9.9	10.2	10.6	10.3	10.6	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.7	
	Lo PR	237	254	258	264	268	288	292	298	304	327	332	339	347	373	378	386	374	402	408	417	444	477	484	494	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TV) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	AR*F193116C*+TXV		18,000	13,000	14.0	12.0	580	4261910
	ARPT18B14A*		18,000	13,000	13.5	11.5	600	5360135
	ARPT24B14A*		18,000	13,000	13.5	11.5	600	5360136
	ARUF18B14A*		17,000	12,300	13.5	11.0	600	5378537
	ARUF18B14A*+TXV		17,000	12,300	13.5	11.2	600	5360185
	ARUF24B14A*		17,000	12,300	13.5	11.0	600	5378538
	ARUF24B14B*		17,000	12,300	13.5	11.0	600	5647177
	ARUF24B14B*+TXV		17,000	12,300	14.0	11.5	600	5647178
	ARUF30B14A*+TXV		18,000	13,000	14.0	11.5	585	5360186
	ASPF183016E*+TXV		18,000	13,000	15.0	12.5	600	4244350
	ASPT24B14A*		18,000	13,000	14.5	12.5	605	5722738
	ASPT30C14A*		18,400	13,300	15.0	13.0	580	5722739
	ASUF29B14A*		18,000	13,000	14.0	12.0	605	5722737
	ASUF29B14A*+TXV		18,000	13,000	14.5	12.5	605	5722886
	AVPTC183014A*		18,000	13,000	15.0	12.5	600	4431244
	AWUF31XX16A*		17,400	12,600	14.5	12.0	600	3629343
	AWUF32XX16A*		17,400	12,600	14.5	12.0	600	4399562
	CA*F1824*6D*	GME950403BXA*	17,000	12,300	14.0	12.0	600	4701040
	CA*F1824*6D*	G*VC950453BXB*	17,000	12,300	14.0	12.0	600	5621339
	CA*F1824*6D*	A*VM960603BXB*	17,000	12,300	14.0	12.0	600	5621364
	CA*F1824*6D*	A*VC950453BXB*	17,000	12,300	14.0	12.0	600	5621338
	CA*F1824*6D*	G*VM960603BXB*	17,000	12,300	14.0	12.0	600	5621365
SSX14 0181B*	CA*F3131*6D*+EEP+TXV		18,000	13,000	14.0	12.0	600	4385560
	CA*F3131*6D*+MBVC1200**-1A*+TXV		18,400	13,300	15.0	12.5	550	4385561
	CA*F3131*6D*+TXV	GME950403BXA*	18,400	13,300	15.0	12.5	650	4701050
	CA*F3131*6D*+TXV	GME950603BXA*	18,000	13,000	15.0	12.5	600	4701052
	CA*F3131*6D*+TXV	A*VC950704CXB*	18,000	13,000	15.0	12.5	600	5621350
	CA*F3131*6D*+TXV	A*VC950714CXB*	18,000	13,000	15.0	12.5	600	5621358
	CA*F3131*6D*+TXV	A*VC80604B*B*	18,400	13,300	15.0	12.5	620	5038850
	CA*F3131*6D*+TXV	G*VC80604B*B*	18,400	13,300	15.0	12.5	620	5038948
	CA*F3131*6D*+TXV	A*VM960604CXB*	18,000	13,000	15.0	12.5	600	5621374
	CA*F3131*6D*+TXV	A*VM960603BXB*	18,400	13,300	15.0	12.5	650	5621366
	CA*F3131*6D*+TXV	G*VM960603BXB*	18,400	13,300	15.0	12.5	650	5621367
	CA*F3131*6D*+TXV	G*VC950453BXB*	18,400	13,300	15.0	12.5	650	5621341
	CA*F3131*6D*+TXV	G*VC950704CXB*	18,000	13,000	15.0	12.5	600	5621351
	CA*F3131*6D*+TXV	G*VC950714CXB*	18,000	13,000	15.0	12.5	600	5621359
	CA*F3131*6D*+TXV	G*VM960604CXB*	18,000	13,000	15.0	12.5	600	5621375
	CA*F3131*6D*+TXV	A*VC950453BXB*	18,400	13,300	15.0	12.5	650	5621340
	CA*F3636*6D*+EEP		18,000	13,000	13.8	11.8	600	4696195
	CA*F3636*6D*+EEP+TXV		18,000	13,000	14.0	12.0	600	4392770
	CA*F3636*6D*+MBVC1200**-1A*+TXV		18,400	13,300	15.0	12.5	600	4392771
	CA*F3743*6D*+EEP+TXV		18,400	13,300	14.5	12.2	600	4415026
	CA*F3743*6D*+TXV	GME950403BXA*	18,000	13,000	15.0	12.5	600	4701070
	CA*F3743*6D*+TXV	GME950603BXA*	18,000	13,000	15.0	12.5	600	4701074
	CA*F3743*6D*+TXV	A*VM960603BXB*	18,000	13,000	15.0	12.5	600	5621368

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	CA*F3743*6D*+TXV	G*VC950453BXB*	18,000	13,000	15.0	12.5	600	5621343
	CA*F3743*6D*+TXV	A*VC950704CXB*	18,000	13,000	15.0	12.5	600	5621352
	CA*F3743*6D*+TXV	G*VC950714CXB*	18,000	13,000	15.0	12.5	600	5621361
	CA*F3743*6D*+TXV	G*VM960603BXB*	18,000	13,000	15.0	12.5	600	5621369
	CA*F3743*6D*+TXV	A*VC950453BXB*	18,000	13,000	15.0	12.5	600	5621342
	CA*F3743*6D*+TXV	A*VC950714CXB*	18,000	13,000	15.0	12.5	600	5621360
	CA*F3743*6D*+TXV	G*VC950704CXB*	18,000	13,000	15.0	12.5	600	5621353
	CA*F3743*6D*+TXV	A*VM960604CXB*	18,000	13,000	15.0	12.5	600	5621376
	CA*F3743*6D*+TXV	G*VM960604CXB*	18,000	13,000	15.0	12.5	600	5621377
	CAPT3131*4A*	G*VC80604B*B*	18,400	13,300	15.0	12.5	550	5520474
	CAPT3131*4A*	G*VM960604CXB*	18,000	13,000	15.0	12.5	550	5621379
	CAPT3131*4A*	G*VC950714CXB*	18,000	13,000	15.0	12.5	550	5621363
	CAPT3131*4A*	A*VM960604CXB*	18,000	13,000	15.0	12.5	550	5621378
	CAPT3131*4A*	A*VC80604B*B*	18,400	13,300	15.0	12.5	550	5520468
	CAPT3131*4A*	GME950403BXA*	18,400	13,300	15.0	12.5	550	5520480
	CAPT3131*4A*	GME950603BXA*	18,000	13,000	15.0	12.5	550	5520481
	CAPT3131*4A*	A*VC950704CXB*	18,000	13,000	15.0	12.5	600	5621354
	CAPT3131*4A*	G*VM960603BXB*	18,400	13,300	15.0	12.5	625	5621371
	CAPT3131*4A*	G*VC950704CXB*	18,000	13,000	15.0	12.5	600	5621355
	CAPT3131*4A*	A*VC950453BXB*	18,400	13,300	15.0	12.5	585	5621344
	CAPT3131*4A*	G*VC950453BXB*	18,400	13,300	15.0	12.5	585	5621345
SSX14	CAPT3131*4A*	A*VC950714CXB*	18,000	13,000	15.0	12.5	550	5621362
0181B*	CAPT3131*4A*	A*VM960603BXB*	18,400	13,300	15.0	12.5	625	5621370
(cont.)	CAPT3131*4A*+EEP		18,000	13,000	14.0	12.0	550	5520482
	CAPT3131*4A*+MBVC1200*-1A*		18,400	13,300	15.0	12.5	535	5527048
	CHPF2430B6C*+EEP+TXV		18,000	13,000	14.0	12.0	600	3456819
	CHPF2430B6C*+MBVC1200*-1A*+TXV		18,000	13,000	15.0	12.5	600	3609463
	CHPF2430B6C*+TXV	GME950403BXA*	18,000	13,000	15.0	12.5	600	4701106
	CHPF2430B6C*+TXV	G*E80603B*B*	18,000	13,000	15.0	12.5	670	5038949
	CHPF2430B6C*+TXV	A*VC80604B*B*	18,000	13,000	15.0	12.5	620	5038988
	CHPF2430B6C*+TXV	G*VM960603BXB*	18,000	13,000	15.0	12.5	600	5621373
	CHPF2430B6C*+TXV	G*VC950453BXB*	18,000	13,000	15.0	12.5	600	5621347
	CHPF2430B6C*+TXV	G*VM960604CXB*	18,000	13,000	15.0	12.5	600	5621381
	CHPF2430B6C*+TXV	G*VC80604B*B*	18,000	13,000	15.0	12.5	620	5038987
	CHPF2430B6C*+TXV	A*VM960603BXB*	18,000	13,000	15.0	12.5	600	5621372
	CHPF2430B6C*+TXV	A*VM960604CXB*	18,000	13,000	15.0	12.5	600	5621380
	CHPF2430B6C*+TXV	A*VC950453BXB*	18,000	13,000	15.0	12.5	600	5621346
	CHPF3636B6C*+EEP		18,000	13,000	13.8	11.8	600	4696196
	CHPF3636B6C*+EEP+TXV		18,400	13,300	14.5	12.2	600	3456825
	CSCF3036N6D*+EEP+TXV		18,400	13,300	14.0	12.0	600	4767451
	CSCF3036N6D*+TXV	A*VC950704CXB*	18,400	13,300	15.0	12.5	600	5621356
	CSCF3036N6D*+TXV	G*VC950453BXB*	18,400	13,300	15.0	12.5	650	5621349
	CSCF3036N6D*+TXV	G*VC950704CXB*	18,400	13,300	15.0	12.5	600	5621357
	CSCF3036N6D*+TXV	A*VC950453BXB*	18,400	13,300	15.0	12.5	650	5621348
	CSCF3642N6D*+EEP+TXV		18,400	13,300	14.5	12.0	600	4767459

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	AR*F193116C*		24,000	16,300	14.0	12.0	780	4260515
	ARPT24B14A*		22,000	15,000	13.3	11.0	780	5360187
	ARPT30B14A*		23,400	15,900	14.0	12.0	775	5360137
	ARUF24B14B*		23,000	15,700	13.5	11.0	600	5647179
	ARUF24B14B*+TXV		23,000	15,700	14.0	11.5	600	5647180
	ARUF30B14A*		23,400	15,900	14.0	12.0	775	5360138
	ARUF30B14A*+TXV		23,400	15,900	14.0	12.0	775	5383476
	ASPF313716E*		24,000	16,300	15.0	12.5	800	4355455
	ASPT24B14A*		23,000	15,700	13.8	11.8	810	5722744
	ASPT30C14A*		23,600	16,100	15.0	12.5	845	5722745
	ASUF29B14A*		23,000	15,700	13.5	11.5	810	5722740
	ASUF29B14A*+TXV		23,000	15,700	13.8	11.8	810	5722741
	ASUF39C14A*		23,600	16,100	14.0	12.0	885	5722742
	ASUF39C14A*+TXV		23,600	16,100	15.0	12.5	885	5722743
	AVPTC313714A*		24,000	16,300	15.0	12.5	725	4431251
	AWUF31XX16A*		23,000	15,700	14.5	12.0	800	3629344
	AWUF32XX16A*		23,000	15,700	14.5	12.0	800	3629345
	CA*F3636*6D*	G*VC80604B*B*	23,600	16,100	15.0	12.5	750	5039030
	CA*F3636*6D*	G*E80603B*B*	23,600	16,100	15.0	12.5	670	5039125
	CA*F3636*6D*	GME950603BXA*	23,400	15,900	14.5	12.0	800	4703591
	CA*F3636*6D*	G*VC950915DXB*	23,600	16,100	15.0	12.5	725	5621415
	CA*F3636*6D*	A*VM960805DXB*	23,600	16,100	15.0	12.5	725	5621436
SSX14 0241B*	CA*F3636*6D*	G*VC950453BXB*	23,600	16,100	15.0	12.5	725	5621383
	CA*F3636*6D*	A*VC950905CXB*	23,600	16,100	15.0	12.5	725	5621410
	CA*F3636*6D*	G*VC950905CXB*	23,600	16,100	15.0	12.5	725	5621411
	CA*F3636*6D*	A*VC950905DXB*	23,600	16,100	15.0	12.5	725	5621412
	CA*F3636*6D*	A*VC80604B*B*	23,600	16,100	15.0	12.5	750	5039126
	CA*F3636*6D*	GME950403BXA*	23,400	15,900	14.5	12.3	800	4703562
	CA*F3636*6D*	G*VM960603BXB*	23,600	16,100	15.0	12.5	725	5621417
	CA*F3636*6D*	G*VM960805DXB*	23,600	16,100	15.0	12.5	725	5621437
	CA*F3636*6D*	A*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621390
	CA*F3636*6D*	G*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621391
	CA*F3636*6D*	A*VC950714CXB*	23,600	16,100	15.0	12.5	725	5621402
	CA*F3636*6D*	G*VC950714CXB*	23,600	16,100	15.0	12.5	725	5621403
	CA*F3636*6D*	G*VM960805CXB*	23,600	16,100	15.0	12.5	725	5621435
	CA*F3636*6D*	A*VM960603BXB*	23,600	16,100	15.0	12.5	725	5621416
	CA*F3636*6D*	A*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621422
	CA*F3636*6D*	G*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621423
	CA*F3636*6D*	A*VC950453BXB*	23,600	16,100	15.0	12.5	725	5621382
	CA*F3636*6D*	G*VC950905DXB*	23,600	16,100	15.0	12.5	725	5621413
	CA*F3636*6D*	A*VC950915DXB*	23,600	16,100	15.0	12.5	725	5621414
	CA*F3636*6D*	A*VM960805CXB*	23,600	16,100	15.0	12.5	725	5621434
	CA*F3636*6D*+EEP		24,000	16,300	14.0	12.0	725	4392789
	CA*F3636*6D*+MBVC1200*-1A*		24,000	16,300	15.0	12.5	725	4392790
	CA*F3642*6D*	A*VC81005C*B*	23,600	16,100	15.0	12.5	750	5038823

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	CA*F3642*6D*	G*VC81005C*B*	23,600	16,100	15.0	12.5	750	5039031
	CA*F3642*6D*	A*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621424
	CA*F3642*6D*	G*VC950714CXB*	23,600	16,100	15.0	12.5	725	5621405
	CA*F3642*6D*	GME950603BXA*	23,400	15,900	14.5	12.0	800	4703600
	CA*F3642*6D*	A*VC950714CXB*	23,600	16,100	15.0	12.5	725	5621404
	CA*F3642*6D*	G*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621393
	CA*F3642*6D*	A*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621392
	CA*F3642*6D*	ADVC81005C*B*	23,600	16,100	15.0	12.5	780	5039032
	CA*F3642*6D*	G*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621425
	CA*F3642*6D*+EEP		24,000	16,300	14.0	12.0	725	3880052
	CA*F3642*6D*+TXV	GME950603BXA*	23,400	15,900	15.0	12.5	800	4703628
	CA*F3743*6D*	GME950603BXA*	23,400	15,900	14.5	12.0	800	4703608
	CA*F3743*6D*	A*VC950714CXB*	23,600	16,100	15.0	12.5	725	5621406
	CA*F3743*6D*	A*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621394
	CA*F3743*6D*	G*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621427
	CA*F3743*6D*	A*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621426
	CA*F3743*6D*	G*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621395
	CA*F3743*6D*	G*VC950714CXB*	23,600	16,100	15.0	12.5	725	5621407
	CA*F3743*6D*+EEP		24,000	16,300	14.0	12.0	725	4415077
	CA*F3743*6D*+EEP+TXV		24,000	16,300	14.5	12.2	725	4415078
	CA*F3743*6D*+TXV	GME950403BXA*	23,400	15,900	15.0	12.5	800	4703566
SSX14	CA*F3743*6D*+TXV	GME950603BXA*	23,400	15,900	14.5	12.0	800	4703610
0241B*	CA*F3743*6D*+TXV	A*VC950453BXB*	23,600	16,100	15.0	12.5	725	5621384
(cont.)	CA*F3743*6D*+TXV	G*VC950714CXB*	23,600	16,100	15.0	12.5	725	5621409
	CA*F3743*6D*+TXV	A*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621428
	CA*F3743*6D*+TXV	G*VC950453BXB*	23,600	16,100	15.0	12.5	750	5621385
	CA*F3743*6D*+TXV	A*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621396
	CA*F3743*6D*+TXV	G*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621397
	CA*F3743*6D*+TXV	G*VM960603BXB*	23,600	16,100	15.0	12.5	750	5621419
	CA*F3743*6D*+TXV	A*VC950714CXB*	23,600	16,100	15.0	12.5	725	5621408
	CA*F3743*6D*+TXV	A*VM960603BXB*	23,600	16,100	15.0	12.5	725	5621418
	CA*F3743*6D*+TXV	G*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621429
	CHPF3636B6C*	A*VC80604B*B*	23,600	16,100	14.5	12.2	750	5038989
	CHPF3636B6C*	G*VC80604B*B*	23,600	16,100	14.5	12.2	750	5039033
	CHPF3636B6C*	A*VM960603BXB*	23,600	16,100	15.0	12.5	725	5621420
	CHPF3636B6C*	G*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621431
	CHPF3636B6C*	G*E80603B*B*	23,600	16,100	14.5	12.2	670	5038950
	CHPF3636B6C*	GME950403BXA*	23,400	15,900	14.5	12.3	800	4703571
	CHPF3636B6C*	A*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621430
	CHPF3636B6C*	A*VC950453BXB*	23,600	16,100	15.0	12.5	725	5621386
	CHPF3636B6C*	G*VC950453BXB*	23,600	16,100	15.0	12.5	725	5621387
	CHPF3636B6C*	G*VM960603BXB*	23,600	16,100	15.0	12.5	725	5621421
	CHPF3636B6C*+EEP		24,000	16,300	14.0	12.0	725	3456873
	CHPF3636B6C*+EEP+TXV		24,000	16,300	14.5	12.2	725	3456874
	CHPF3636B6C*+MBVC1200**~1A*		24,000	16,300	15.0	12.5	725	3609468

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
SSX14 0241B* (cont.)	CHPF3642C6C*	A*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621432
	CHPF3642C6C*	G*VM960604CXB*	23,600	16,100	15.0	12.5	725	5621433
	CHPF3642C6C*	A*VC80805C*B*	23,000	15,700	15.0	12.5	730	5038851
	CHPF3642C6C*	G*VC80805C*B*	23,000	15,700	15.0	12.5	730	5039236
	CHPF3642C6C*	G*VC81005C*B*	23,000	15,700	15.0	12.5	750	5038951
	CHPF3642C6C*	GME950603BXA*	23,400	15,900	14.5	12.0	800	4703616
	CHPF3642C6C*	A*VC81005C*B*	23,000	15,700	15.0	12.5	750	5039149
	CHPF3642C6C*	A*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621398
	CHPF3642C6C*	G*VC950704CXB*	23,600	16,100	15.0	12.5	725	5621399
	CHPF3642C6C*+TXV	GME950603BXA*	23,400	15,900	15.0	12.5	800	4703636
	CSCF3036N6D*	A*VC950453BXB*	23,600	16,100	14.5	12.2	800	5621388
	CSCF3036N6D*	G*VC950704CXB*	23,600	16,100	14.5	12.2	875	5621401
	CSCF3036N6D*	A*VC950704CXB*	23,600	16,100	14.5	12.2	875	5621400
	CSCF3036N6D*	G*VC950453BXB*	23,600	16,100	14.5	12.2	800	5621389
	CSCF3036N6D*+EEP		23,600	16,100	14.0	12.0	800	4767469
	CSCF3642N6D*+EEP+TXV		24,000	16,300	14.0	12.0	800	4767470
SSX14 0301B*	AR*F193116C*		28,800	21,400	14.0	12.0	1,000	4260516
	ARPT36C14A*		27,400	20,400	13.5	11.5	1,000	5360140
	ARUF30B14A*		26,800	19,900	13.0	11.0	840	5360141
	ARUF36C14A*		27,000	20,000	13.3	11.5	1,000	5360142
	ARUF36C14A*+TXV		27,000	20,000	13.3	11.5	1,000	5383480
	ARUF36C14B*		27,000	20,000	13.3	11.5	1,000	5647181
	ARUF36C14B*+TXV		27,000	20,000	13.3	11.5	1,000	5647182
	ASPF313716E*		29,000	21,400	15.0	12.5	1,000	4355456
	ASPT36C14A*		29,000	21,400	15.0	12.5	1,010	5722762
	ASUF39C14A*		29,000	21,400	14.0	12.0	1,005	5722746
	ASUF39C14A*+TXV		29,000	21,400	15.0	12.5	1,005	5722747
	AVPTC313714A*		28,800	21,400	15.0	12.5	1,000	4431253
	AWUF31XX16A*		28,000	20,800	14.0	12.0	950	3634601
	AWUF31XX16A*+TXV		28,400	21,000	14.5	12.3	1,000	4055885
	AWUF32XX16A*		28,000	20,800	14.0	12.0	950	3629346
	AWUF32XX16A*+TXV		28,400	21,000	14.5	12.3	1,000	4055886
	AWUF37XX16B*		28,400	21,000	14.0	12.0	1,000	4635479
	AWUF37XX16B*+TXV		28,600	21,200	14.5	12.0	1,000	4635481
	CA*F3636*6D*	GME950403BXA*	28,800	21,400	15.0	12.8	1,000	4701055
	CA*F3636*6D*	G*VC950704CXB*	28,800	21,400	14.5	12.3	1,000	5621449
	CA*F3636*6D*	A*VM960603BXB*	28,800	21,400	15.0	12.8	1,000	5621500
	CA*F3636*6D*	A*VC950704CXB*	28,800	21,400	14.5	12.3	1,000	5621448
	CA*F3636*6D*	G*VC950453BXB*	28,800	21,400	15.0	12.8	1,000	5621439
	CA*F3636*6D*	A*VM960604CXB*	28,800	21,400	14.5	12.3	1,000	5621510
	CA*F3636*6D*	A*VC950714CXB*	28,800	21,400	14.5	12.3	1,000	5621464
	CA*F3636*6D*	G*VC950714CXB*	28,800	21,400	14.5	12.3	1,000	5621465
	CA*F3636*6D*	A*VC950453BXB*	28,800	21,400	15.0	12.8	1,000	5621438
	CA*F3636*6D*	G*VM960603BXB*	28,800	21,400	15.0	12.8	1,000	5621501
CA*F3636*6D*	G*VM960604CXB*	28,800	21,400	14.5	12.3	1,000	5621511	

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
SSX14 0301B* (cont.)	CA*F3636*6D*+EEP+TXV		28,800	21,400	14.0	12.0	1,000	4392795
	CA*F3636*6D*+MBVC1200** -1A*		28,800	21,400	15.0	12.5	1,000	4559583
	CA*F3636*6D*+TXV	GME950603BXA*	28,600	21,200	14.5	12.3	1,000	4703640
	CA*F3636*6D*+TXV	A*VC80604B*B*	28,000	20,800	15.0	12.4	1,000	5039128
	CA*F3636*6D*+TXV	G*VC80604B*B*	28,000	20,800	15.0	12.4	1,000	5039127
	CA*F3642*6D*	G*VC81005C*B*	28,600	21,200	15.0	12.5	1,000	5039252
	CA*F3642*6D*	A*VC80805C*B*	28,600	21,200	15.0	12.5	990	5038980
	CA*F3642*6D*	G*VM960805DXB*	29,000	21,400	15.0	12.5	1,000	5621531
	CA*F3642*6D*	A*VM961005DXB*	28,600	21,200	14.7	12.3	1,000	5621536
	CA*F3642*6D*	G*VC950905DXB*	29,000	21,400	15.0	12.5	1,000	5621481
	CA*F3642*6D*	A*VC81005C*B*	28,600	21,200	15.0	12.5	1,000	5038881
	CA*F3642*6D*	ADVC80805C*B*	28,600	21,200	15.0	12.5	990	5039201
	CA*F3642*6D*	G*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621451
	CA*F3642*6D*	A*VC950915DXB*	29,000	21,400	15.0	12.5	1,000	5621490
	CA*F3642*6D*	G*VC950915DXB*	29,000	21,400	15.0	12.5	1,000	5621491
	CA*F3642*6D*	G*VM961155DXB*	28,600	21,200	14.7	12.3	1,000	5621541
	CA*F3642*6D*	A*VC950905CXB*	29,000	21,400	15.0	12.5	1,000	5621474
	CA*F3642*6D*	G*VC950905CXB*	29,000	21,400	15.0	12.5	1,000	5621475
	CA*F3642*6D*	A*VC950905DXB*	29,000	21,400	15.0	12.5	1,000	5621480
	CA*F3642*6D*	A*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621450
	CA*F3642*6D*	A*VC951155DXB*	28,600	21,200	14.7	12.3	1,000	5621496
	CA*F3642*6D*	G*VC951155DXB*	28,600	21,200	14.7	12.3	1,000	5621497
	CA*F3642*6D*	A*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621512
	CA*F3642*6D*	G*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621513
	CA*F3642*6D*	A*VM960805CXB*	29,000	21,400	15.0	12.5	1,000	5621524
	CA*F3642*6D*	A*VM960805DXB*	29,000	21,400	15.0	12.5	1,000	5621530
	CA*F3642*6D*	A*VM961155DXB*	28,600	21,200	14.7	12.3	1,000	5621540
	CA*F3642*6D*	ADVC81005C*B*	28,600	21,200	15.0	12.5	1,010	5039053
	CA*F3642*6D*	G*VC80805C*B*	28,600	21,200	15.0	12.5	990	5039264
	CA*F3642*6D*	A*VC950714CXB*	28,800	21,400	15.0	12.5	1,000	5621466
	CA*F3642*6D*	G*VC950714CXB*	28,800	21,400	15.0	12.5	1,000	5621467
	CA*F3642*6D*	G*VM960805CXB*	29,000	21,400	15.0	12.5	1,000	5621525
	CA*F3642*6D*	G*VM961005DXB*	28,600	21,200	14.7	12.3	1,000	5621537
	CA*F3642*6D*+EEP		28,800	21,400	14.0	12.0	1,000	4559586
	CA*F3642*6D*+TXV	G*E81005C*B*	28,800	21,400	15.0	12.4	1,080	5038824
	CA*F3642*6D*+TXV	GME950603BXA*	28,600	21,200	15.0	12.5	1,000	4703649
	CA*F3642*6D*+TXV	G*E80603B*B*	28,800	21,400	15.0	12.4	1,050	5038952
	CA*F3642*6D*+TXV	G*E80805C*B*	28,800	21,400	15.0	12.4	1,060	5039154
	CA*F3743*6D*	G*VC950453BXB*	28,800	21,400	14.5	12.2	1,000	5621441
	CA*F3743*6D*	G*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621453
	CA*F3743*6D*	A*VC951155DXB*	28,600	21,200	14.7	12.3	1,000	5621498
	CA*F3743*6D*	G*VM960603BXB*	28,800	21,400	14.5	12.2	1,000	5621503
CA*F3743*6D*	A*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621514	
CA*F3743*6D*	G*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621515	
CA*F3743*6D*	G*VM961005DXB*	28,600	21,200	14.7	12.3	1,000	5621539	

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	CA*F3743*6D*	A*VC950905CXB*	29,000	21,400	15.0	12.5	1,000	5621476
	CA*F3743*6D*	A*VM961005DXB*	28,600	21,200	14.7	12.3	1,000	5621538
	CA*F3743*6D*	A*VC950915DXB*	29,000	21,400	15.0	12.5	1,000	5621492
	CA*F3743*6D*	A*VM960603BXB*	28,800	21,400	14.5	12.2	1,000	5621502
	CA*F3743*6D*	A*VM960805CXB*	29,000	21,400	15.0	12.5	1,000	5621526
	CA*F3743*6D*	G*VM960805CXB*	29,000	21,400	15.0	12.5	1,000	5621527
	CA*F3743*6D*	G*VM960805DXB*	29,000	21,400	15.0	12.5	1,000	5621533
	CA*F3743*6D*	A*VC950453BXB*	28,800	21,400	14.5	12.2	1,000	5621440
	CA*F3743*6D*	G*VC950714CXB*	28,800	21,400	15.0	12.5	1,000	5621469
	CA*F3743*6D*	A*VM961155DXB*	28,600	21,200	14.7	12.3	1,000	5621542
	CA*F3743*6D*	G*VC950905CXB*	29,000	21,400	15.0	12.5	1,000	5621477
	CA*F3743*6D*	G*VC950905DXB*	29,000	21,400	15.0	12.5	1,000	5621483
	CA*F3743*6D*	G*VC950915DXB*	29,000	21,400	15.0	12.5	1,000	5621493
	CA*F3743*6D*	G*VC951155DXB*	28,600	21,200	14.7	12.3	1,000	5621499
	CA*F3743*6D*	G*VM961155DXB*	28,600	21,200	14.7	12.3	1,000	5621543
	CA*F3743*6D*	A*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621452
	CA*F3743*6D*	A*VC950714CXB*	28,800	21,400	15.0	12.5	1,000	5621468
	CA*F3743*6D*	A*VC950905DXB*	29,000	21,400	15.0	12.5	1,000	5621482
	CA*F3743*6D*	A*VM960805DXB*	29,000	21,400	15.0	12.5	1,000	5621532
	CA*F3743*6D*	GME950403BXA*	28,800	21,400	14.5	12.2	1,000	4701065
	CA*F3743*6D*+EEP+TXV		28,800	21,400	14.5	12.2	1,000	4415079
	CA*F3743*6D*+TXV	GME950603BXA*	28,600	21,200	15.0	12.5	1,000	4703654
	CA*F3743*6D*+TXV	G*E81005C*B*	28,800	21,400	15.0	12.4	1,080	5038990
SSX14 0301B* (cont.)	CA*F3743*6D*+TXV	A*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621454
	CA*F3743*6D*+TXV	G*VC950905DXB*	28,800	21,400	15.0	13.0	1,000	5621485
	CA*F3743*6D*+TXV	G*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621455
	CA*F3743*6D*+TXV	A*VC950714CXB*	28,800	21,400	15.0	12.5	1,000	5621470
	CA*F3743*6D*+TXV	G*E80805C*B*	28,800	21,400	15.0	12.4	1,060	5038825
	CA*F3743*6D*+TXV	A*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621516
	CA*F3743*6D*+TXV	A*VC950453BXB*	28,800	21,400	15.0	12.5	1,000	5621442
	CA*F3743*6D*+TXV	G*VC950714CXB*	28,800	21,400	15.0	12.5	1,000	5621471
	CA*F3743*6D*+TXV	G*VC950453BXB*	28,800	21,400	15.0	12.5	1,000	5621443
	CA*F3743*6D*+TXV	A*VC950905DXB*	28,800	21,400	15.0	13.0	1,000	5621484
	CA*F3743*6D*+TXV	G*VM960603BXB*	28,800	21,400	15.0	12.5	1,000	5621505
	CA*F3743*6D*+TXV	A*VM960603BXB*	28,800	21,400	15.0	12.5	1,000	5621504
	CA*F3743*6D*+TXV	GME950403BXA*	28,800	21,400	15.0	12.5	1,000	4701071
	CA*F3743*6D*+TXV	G*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621517
	CA*F4860*6D*	G*VM960805CXB*	28,800	21,400	15.0	13.0	1,000	5621529
	CA*F4860*6D*	G*VM960805DXB*	28,800	21,400	15.0	13.0	1,000	5621535
	CA*F4860*6D*	G*VC950915DXB*	28,800	21,400	15.0	13.0	1,000	5621495
	CA*F4860*6D*	A*VM960805DXB*	28,800	21,400	15.0	13.0	1,000	5621534
	CA*F4860*6D*	G*VC950905DXB*	28,800	21,400	15.0	13.0	1,000	5621487
	CA*F4860*6D*	A*VC950905DXB*	28,800	21,400	15.0	13.0	1,000	5621486
	CA*F4860*6D*	A*VC950915DXB*	28,800	21,400	15.0	13.0	1,000	5621494
	CA*F4860*6D*	A*VC950905CXB*	28,800	21,400	15.0	13.0	1,000	5621478
	CA*F4860*6D*	G*VC950905CXB*	28,800	21,400	15.0	13.0	1,000	5621479
	CA*F4860*6D*	A*VM960805CXB*	28,800	21,400	15.0	13.0	1,000	5621528
	CAPT3743*4A*	G*E81005C*B*	28,800	21,400	15.0	12.0	1,000	5520501

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	CAPT3743*4A*	GME950403BXA*	28,800	21,400	15.0	12.5	1,000	5520508
	CAPT3743*4A*	A*VC950714CXB*	28,800	21,400	15.0	12.5	995	5621472
	CAPT3743*4A*	G*VM960603BXB*	28,800	21,400	15.0	12.5	1,000	5621507
	CAPT3743*4A*	G*VC950453BXB*	28,800	21,400	15.0	12.5	1,000	5621445
	CAPT3743*4A*	G*VC950704CXB*	28,800	21,400	15.0	12.5	975	5621457
	CAPT3743*4A*	GME950603BXA*	28,600	21,200	15.0	12.5	1,000	5520509
	CAPT3743*4A*	G*VC950714CXB*	28,800	21,400	15.0	12.5	995	5621473
	CAPT3743*4A*	A*VC950905DXB*	28,800	21,400	15.0	13.0	975	5621488
	CAPT3743*4A*	A*VC950453BXB*	28,800	21,400	15.0	12.5	1,000	5621444
	CAPT3743*4A*	A*VC950704CXB*	28,800	21,400	15.0	12.5	975	5621456
	CAPT3743*4A*	A*VM960603BXB*	28,800	21,400	15.0	12.5	1,000	5621506
	CAPT3743*4A*	G*E80805C*B*	28,800	21,400	15.0	12.0	1,000	5520500
	CAPT3743*4A*	G*VC950905DXB*	28,800	21,400	15.0	13.0	975	5621489
	CAPT3743*4A*	A*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621518
	CAPT3743*4A*	G*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621519
	CAPT3743*4A*+EEP		28,800	21,400	14.5	12.0	1,000	5520510
	CAPT3743*4A*+MBVC1200**_-1A*		28,800	21,400	15.0	12.5	980	5611382
	CAPT3743*4A*+MBVC1600**_-1A*		29,000	21,400	15.0	12.5	1,000	5611317
	CHPF3636B6C*	G*VC950453BXB*	28,800	21,400	15.0	12.5	1,000	5621447
	CHPF3636B6C*	A*VC950453BXB*	28,800	21,400	15.0	12.5	1,000	5621446
	CHPF3636B6C*	G*VM960603BXB*	28,800	21,400	15.0	12.5	1,000	5621509
	CHPF3636B6C*	GME950403BXA*	28,800	21,400	15.0	12.5	1,000	4701108
	CHPF3636B6C*	A*VM960603BXB*	28,800	21,400	15.0	12.5	1,000	5621508
	CHPF3636B6C*+EEP		28,800	21,400	14.0	12.0	1,000	3456928
SSX14 0301B* (cont.)	CHPF3636B6C*+MBVC1200**_-1A*		28,800	21,400	15.0	12.5	1,000	3609470
	CHPF3642C6C*	A*VC80805C*B*	28,600	21,200	15.0	12.5	990	5038981
	CHPF3642C6C*	A*VC80604B*B*	28,600	21,200	15.0	12.4	1,000	5038867
	CHPF3642C6C*	G*VC80604B*B*	28,600	21,200	15.0	12.4	1,000	5039054
	CHPF3642C6C*	G*VC81005C*B*	28,600	21,200	15.0	12.5	1,000	5039175
	CHPF3642C6C*	G*VC80805C*B*	28,600	21,200	15.0	12.5	990	5039202
	CHPF3642C6C*	A*VC81005C*B*	28,600	21,200	15.0	12.5	1,000	5038868
	CHPF3642C6C*	A*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621458
	CHPF3642C6C*	G*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621459
	CHPF3642C6C*	A*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621520
	CHPF3642C6C*	G*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621521
	CHPF3642C6C*+EEP+TXV		28,800	21,400	14.5	12.2	1,000	4588795
	CHPF3642C6C*+TXV	GME950603BXA*	28,600	21,200	15.0	12.5	1,000	4703657
	CHPF3642D6C*	G*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621461
	CHPF3642D6C*	A*VC950704CXB*	28,800	21,400	15.0	12.5	1,000	5621460
	CHPF3642D6C*	A*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621522
	CHPF3642D6C*	G*VM960604CXB*	28,800	21,400	15.0	12.5	1,000	5621523
	CHPF3642D6C*+EEP		28,800	21,400	14.0	12.0	1,000	3456936
	CHPF3642D6C*+TXV	G*E80805C*B*	28,800	21,400	15.0	12.4	1,060	5039155
	CHPF3642D6C*+TXV	G*E81005C*B*	28,800	21,400	15.0	12.4	1,080	5039037
	CHPF3642D6C*+TXV	GME950603BXA*	28,600	21,200	15.0	12.5	1,000	4703663
	CHPF3743C6B*+EEP+TXV		28,800	21,400	14.5	12.2	1,000	5297179
	CSCF3642N6D*	A*VC950704CXB*	28,800	21,400	15.0	12.5	900	5621462
	CSCF3642N6D*	G*VC950704CXB*	28,800	21,400	15.0	12.5	900	5621463
	CSCF3642N6D*+EEP		28,800	21,400	14.0	12.0	1,000	4767481
	CSCF3642N6D*+EEP+TXV		28,800	21,400	14.5	12.0	1,000	4767482

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	ARPT36D14A*		34,000	25,200	14.5	12.0	1,140	5360143
	ARPT42D14A*		35,000	26,000	14.5	12.0	1,175	5360144
	ARPT48D14A*		35,000	26,000	14.5	12.0	1,280	5385495
	ARUF36C14A*		33,600	24,800	13.5	11.5	1,230	5360145
	ARUF36C14A*+TXV		33,600	24,800	14.0	12.0	1,230	5385493
	ARUF36C14B*		33,600	24,800	13.3	11.5	1,230	5647183
	ARUF36C14B*+TXV		33,600	24,800	13.3	11.5	1,230	5647184
	ARUF42C14A*		34,000	25,200	13.5	11.5	1,175	5383482
	ARUF48D14A*		35,000	26,000	14.0	12.0	1,185	5360189
	ARUF48D14A*+TXV		34,400	25,400	14.5	12.0	1,185	5385494
	ASPF426016E*		34,600	25,600	15.0	12.5	1,200	4358303
	ASPT36C14A*		34,200	25,400	14.5	12.5	1,210	5722749
	ASPT42D14A*		34,800	25,800	15.0	12.5	1,280	5722751
	ASUF39C14A*		34,200	25,400	14.0	12.0	1,005	5722748
	ASUF39C14A*+TXV		34,200	25,400	14.5	12.5	1,005	5722750
	AVPTC313714A*		34,000	25,200	14.5	12.0	1,200	4431258
	AVPTC426014A*		35,000	26,000	15.0	13.0	1,225	4431261
	AWUF37XX16B*+TXV		33,000	24,400	14.5	12.2	1,050	3897191
SSX14	CA*F3636*6D*+EEP+TXV		33,000	24,400	14.0	11.8	1,200	4392796
0361B*	CA*F3642*6D*	GME950603BXA*	34,200	25,400	13.5	11.5	1,200	4703670
	CA*F3642*6D*	GME950805CXA*	34,600	25,600	15.0	12.5	1,150	4701159
	CA*F3642*6D*	G*VC950704CXB*	34,600	25,600	14.5	12.2	1,250	5621544
	CA*F3642*6D*	G*VC950905CXB*	34,600	25,600	15.0	12.5	1,150	5621558
	CA*F3642*6D*	A*VM960805CXB*	34,600	25,600	15.0	12.5	1,150	5621601
	CA*F3642*6D*	G*VM960805CXB*	34,600	25,600	15.0	12.5	1,150	5621602
	CA*F3642*6D*	A*VC950905CXB*	34,600	25,600	15.0	12.5	1,150	5621557
	CA*F3642*6D*+EEP		34,600	25,600	14.0	12.0	1,200	4588188
	CA*F3642*6D*+MBVC2000** -1A*		35,000	26,000	15.0	12.5	1,200	4887682
	CA*F3642*6D*+TXV	GME950805CXA*	34,600	25,600	15.0	12.5	1,150	4701063
	CA*F3642*6D*+TXV	G*VC950905CXB*	34,600	25,600	15.0	12.5	1,150	5621560
	CA*F3642*6D*+TXV	G*VM960805CXB*	34,600	25,600	15.0	12.5	1,150	5621604
	CA*F3642*6D*+TXV	A*VM960805CXB*	34,600	25,600	15.0	12.5	1,150	5621603
	CA*F3642*6D*+TXV	A*VC950905CXB*	34,600	25,600	15.0	12.5	1,150	5621559
	CA*F3743*6D*	GME950805CXA*	34,600	25,600	15.0	12.5	1,150	4701160
	CA*F3743*6D*	G*VC950905CXB*	34,600	25,600	15.0	12.5	1,150	5621562
	CA*F3743*6D*	A*VC950905CXB*	34,600	25,600	15.0	12.5	1,150	5621561
	CA*F3743*6D*	A*VM960805CXB*	34,600	25,600	15.0	12.5	1,150	5621605
	CA*F3743*6D*	G*VM960805CXB*	34,600	25,600	15.0	12.5	1,150	5621606
	CA*F3743*6D*+EEP		34,600	25,600	14.0	12.0	1,200	4415095
	CA*F3743*6D*+EEP+TXV		34,600	25,600	14.5	12.2	1,200	4415096
	CA*F3743*6D*+TXV	GME951005DXA*	34,600	25,600	15.0	12.5	1,150	4701079
	CA*F3743*6D*+TXV	A*VC950905DXB*	34,600	25,600	15.0	12.5	1,150	5621571
	CA*F3743*6D*+TXV	G*VC950905CXB*	34,600	25,600	15.0	12.5	1,150	5621564
	CA*F3743*6D*+TXV	A*VC951155DXB*	34,600	25,600	15.0	12.5	1,150	5621585
	CA*F3743*6D*+TXV	A*VM960805CXB*	34,600	25,600	15.0	12.5	1,150	5621607

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	CA*F3743*6D*+TXV	A*VM960805DXB*	34,600	25,600	15.0	12.5	1,150	5621615
	CA*F3743*6D*+TXV	A*VM961005DXB*	34,600	25,600	15.0	12.5	1,150	5621621
	CA*F3743*6D*+TXV	G*VM961155DXB*	34,600	25,600	15.0	12.5	1,150	5621630
	CA*F3743*6D*+TXV	A*VC950915DXB*	34,600	25,600	15.0	12.5	1,150	5621579
	CA*F3743*6D*+TXV	G*VC950915DXB*	34,600	25,600	15.0	12.5	1,150	5621580
	CA*F3743*6D*+TXV	G*VM961005DXB*	34,600	25,600	15.0	12.5	1,150	5621622
	CA*F3743*6D*+TXV	G*VC951155DXB*	34,600	25,600	15.0	12.5	1,150	5621586
	CA*F3743*6D*+TXV	G*VM960805CXB*	34,600	25,600	15.0	12.5	1,150	5621608
	CA*F3743*6D*+TXV	A*VM961155DXB*	34,600	25,600	15.0	12.5	1,150	5621629
	CA*F3743*6D*+TXV	GME950805CXA*	34,600	25,600	15.0	12.5	1,150	4701076
	CA*F3743*6D*+TXV	G*E80603B*B*	33,400	24,800	15.0	12.3	1,250	5533315
	CA*F3743*6D*+TXV	A*VC950905CXB*	34,600	25,600	15.0	12.5	1,150	5621563
	CA*F3743*6D*+TXV	G*VC950905DXB*	34,600	25,600	15.0	12.5	1,150	5621572
	CA*F3743*6D*+TXV	G*VM960805DXB*	34,600	25,600	15.0	12.5	1,150	5621616
	CA*F4860*6D*	GME951005DXA*	34,600	25,600	14.5	12.2	1,150	4701086
	CA*F4860*6D*	A*VC81005C*B*	33,400	24,800	14.5	12.3	1,210	5038895
	CA*F4860*6D*	GME950603BXA*	34,200	25,400	14.0	11.5	1,200	4703676
	CA*F4860*6D*	GME950805CXA*	34,600	25,600	15.0	12.5	1,200	4701082
	CA*F4860*6D*	A*VC950704CXB*	34,600	25,600	14.5	12.2	1,150	5621545
	CA*F4860*6D*	G*VC950714CXB*	34,600	25,600	14.5	12.2	1,150	5621554
	CA*F4860*6D*	G*VC951155DXB*	34,600	25,600	14.5	12.2	1,150	5621588
SSX14	CA*F4860*6D*	G*VM960805DXB*	34,600	25,600	15.0	12.5	1,200	5621618
0361B*	CA*F4860*6D*	G*VM961005DXB*	34,600	25,600	14.5	12.2	1,150	5621624
(cont.)	CA*F4860*6D*	G*VC950704CXB*	34,600	25,600	14.5	12.2	1,150	5621546
	CA*F4860*6D*	G*VC950905CXB*	34,600	25,600	15.0	12.5	1,200	5621566
	CA*F4860*6D*	A*VC950905DXB*	34,600	25,600	15.0	12.5	1,200	5621573
	CA*F4860*6D*	A*VM961005DXB*	34,600	25,600	14.5	12.2	1,150	5621623
	CA*F4860*6D*	G*VM961155DXB*	34,600	25,600	14.5	12.2	1,150	5621632
	CA*F4860*6D*	A*VC80805C*B*	33,200	24,600	14.5	12.3	1,190	5038871
	CA*F4860*6D*	G*VC81005C*B*	33,400	24,800	14.5	12.3	1,210	5038982
	CA*F4860*6D*	G*E81005C*B*	33,600	24,800	15.0	12.3	1,230	5039153
	CA*F4860*6D*	G*VC80805C*B*	33,200	24,600	14.5	12.3	1,190	5038882
	CA*F4860*6D*	ADVC80805C*B*	33,200	24,600	14.5	12.3	1,190	5039188
	CA*F4860*6D*	A*VC950714CXB*	34,600	25,600	14.5	12.2	1,150	5621553
	CA*F4860*6D*	G*VC950915DXB*	34,600	25,600	15.0	12.5	1,200	5621582
	CA*F4860*6D*	A*VM960805DXB*	34,600	25,600	15.0	12.5	1,200	5621617
	CA*F4860*6D*	A*VC950905CXB*	34,600	25,600	15.0	12.5	1,200	5621565
	CA*F4860*6D*	A*VC950915DXB*	34,600	25,600	15.0	12.5	1,200	5621581
	CA*F4860*6D*	A*VM960604CXB*	34,600	25,600	14.5	12.2	1,150	5621594
	CA*F4860*6D*	G*VM960604CXB*	34,600	25,600	14.5	12.2	1,150	5621595
	CA*F4860*6D*	A*VM960805CXB*	34,600	25,600	15.0	12.5	1,200	5621609
	CA*F4860*6D*	G*VC950905DXB*	34,600	25,600	15.0	12.5	1,200	5621574
	CA*F4860*6D*	A*VC951155DXB*	34,600	25,600	14.5	12.2	1,150	5621587
	CA*F4860*6D*	ADVC81005C*B*	32,600	24,200	14.5	12.3	1,110	5039019
	CA*F4860*6D*	G*E80805C*B*	33,400	24,800	15.0	12.3	1,210	5039035

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
SSX14 0361B* (cont.)	CA*F4860*6D*	G*VM960805CXB*	34,600	25,600	15.0	12.5	1,200	5621610
	CA*F4860*6D*	A*VM961155DXB*	34,600	25,600	14.5	12.2	1,150	5621631
	CA*F4860*6D*+EEP		35,000	26,000	14.0	12.0	1,200	3880272
	CA*F4860*6D*+TXV	G*VC81005C*B*	33,400	24,800	15.0	12.3	1,210	5038894
	CA*F4860*6D*+TXV	G*VC80805C*B*	33,200	24,600	15.0	12.3	1,190	5038869
	CA*F4860*6D*+TXV	ADVC81005C*B*	32,600	24,200	15.0	12.3	1,110	5039253
	CA*F4860*6D*+TXV	A*VC950714CXB*	34,600	25,600	15.0	12.5	1,100	5621555
	CA*F4860*6D*+TXV	A*VM960604CXB*	34,600	25,600	15.0	12.5	1,100	5621596
	CA*F4860*6D*+TXV	A*VC81005C*B*	33,400	24,800	15.0	12.3	1,210	5038984
	CA*F4860*6D*+TXV	A*VC80805C*B*	33,200	24,600	15.0	12.3	1,190	5039189
	CA*F4860*6D*+TXV	ADVC80805C*B*	33,200	24,600	15.0	12.3	1,190	5038975
	CA*F4860*6D*+TXV	GME950603BXA*	34,200	25,400	14.5	12.0	1,200	4703678
	CA*F4860*6D*+TXV	G*VC950714CXB*	34,600	25,600	15.0	12.5	1,100	5621556
	CA*F4860*6D*+TXV	G*VM960604CXB*	34,600	25,600	15.0	12.5	1,100	5621597
	CA*F4860*6D*+TXV	A*VC950704CXB*	34,600	25,600	15.0	12.5	1,100	5621547
	CA*F4860*6D*+TXV	G*VC950704CXB*	34,600	25,600	15.0	12.5	1,100	5621548
	CAPT3743*4A*	GME950805CXA*	34,600	25,600	15.0	12.5	1,185	5520527
	CAPT3743*4A*	A*VC950905DXB*	34,600	25,600	15.0	12.5	1,275	5621575
	CAPT3743*4A*	G*VC951155DXB*	34,600	25,600	15.0	12.5	1,210	5621590
	CAPT3743*4A*	A*VM961005DXB*	34,600	25,600	15.0	12.5	1,225	5621625
	CAPT3743*4A*	A*VC951155DXB*	34,600	25,600	15.0	12.5	1,210	5621589
	CAPT3743*4A*	G*VM960805DXB*	34,600	25,600	15.0	12.5	1,225	5621620
	CAPT3743*4A*	A*VC950915DXB*	34,600	25,600	15.0	12.5	1,220	5621583
	CAPT3743*4A*	A*VM960805DXB*	34,600	25,600	15.0	12.5	1,225	5621619
	CAPT3743*4A*	G*VM961155DXB*	34,600	25,600	15.0	12.5	1,210	5621634
	CAPT3743*4A*	GME951005DXA*	34,600	25,600	15.0	12.5	1,200	5520528
	CAPT3743*4A*	A*VC950905CXB*	34,600	25,600	15.0	12.5	1,195	5621567
	CAPT3743*4A*	G*VC950915DXB*	34,600	25,600	15.0	12.5	1,220	5621584
	CAPT3743*4A*	G*VM960805CXB*	34,600	25,600	15.0	12.5	1,195	5621612
	CAPT3743*4A*	G*VC950905CXB*	34,600	25,600	15.0	12.5	1,195	5621568
	CAPT3743*4A*	G*VM961005DXB*	34,600	25,600	15.0	12.5	1,225	5621626
	CAPT3743*4A*	G*VC950905DXB*	34,600	25,600	15.0	12.5	1,275	5621576
	CAPT3743*4A*	A*VM960805CXB*	34,600	25,600	15.0	12.5	1,195	5621611
	CAPT3743*4A*	A*VM961155DXB*	34,600	25,600	15.0	12.5	1,210	5621633
	CAPT3743*4A*+EEP		34,600	25,600	14.5	12.0	1,200	5520529
	CAPT3743*4A*+MBVC1600**-1A*		34,000	25,200	14.5	12.0	1,205	5611383
	CAPT3743*4A*+MBVC2000**-1A*		34,000	25,200	14.5	12.0	1,205	5611384
	CHPF3642C6C*	GME950603BXA*	34,200	25,400	13.8	11.5	1,200	4703680
	CHPF3642C6C*	G*E81005C*B*	33,600	24,800	15.0	12.3	1,230	5039163
	CHPF3642C6C*	G*VC950704CXB*	34,600	25,600	14.5	12.2	1,100	5621550
	CHPF3642C6C*	A*VC80805C*B*	33,200	24,600	14.5	12.2	1,190	5038872
	CHPF3642C6C*	G*VC80805C*B*	33,200	24,600	14.5	12.2	1,190	5038883
	CHPF3642C6C*	G*E80805C*B*	33,400	24,800	15.0	12.3	1,210	5039203
	CHPF3642C6C*	G*VM960604CXB*	34,600	25,600	14.5	12.2	1,100	5621599
	CHPF3642C6C*	A*VC950704CXB*	34,600	25,600	14.5	12.2	1,100	5621549

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
SSX14 0361B* (cont.)	CHPF3642C6C*	A*VM960604CXB*	34,600	25,600	14.5	12.2	1,100	5621598
	CHPF3642C6C*	G*VC81005C*B*	33,400	24,800	14.5	12.2	1,210	5039036
	CHPF3642C6C*	A*VC81005C*B*	33,400	24,800	14.5	12.2	1,210	5039059
	CHPF3642C6C*+EEP		34,600	25,600	14.0	12.0	1,200	4392972
	CHPF3642C6C*+TXV	G*VC81005C*B*	33,400	24,800	15.0	12.2	1,210	5038983
	CHPF3642C6C*+TXV	A*VC81005C*B*	33,400	24,800	15.0	12.2	1,210	5039060
	CHPF3642C6C*+TXV	GME950603BXA*	34,200	25,400	14.5	11.5	1,200	4703682
	CHPF3642C6C*+TXV	G*VC950704CXB*	34,600	25,600	15.0	12.2	1,100	5621551
	CHPF3642C6C*+TXV	G*VM960604CXB*	34,600	25,600	15.0	12.2	1,100	5621600
	CHPF3642D6C*	A*VC80604B*B*	33,600	24,800	14.5	12.2	1,220	5039061
	CHPF3642D6C*	G*VC951155DXB*	34,600	25,600	15.0	12.2	1,150	5621592
	CHPF3642D6C*	G*VM961005DXB*	34,600	25,600	15.0	12.2	1,150	5621628
	CHPF3642D6C*	A*VM961155DXB*	34,600	25,600	15.0	12.2	1,150	5621635
	CHPF3642D6C*	G*VC80604B*B*	33,600	24,800	14.5	12.2	1,220	5039204
	CHPF3642D6C*	A*VC951155DXB*	34,600	25,600	15.0	12.2	1,150	5621591
	CHPF3642D6C*	G*VM961155DXB*	34,600	25,600	15.0	12.2	1,150	5621636
	CHPF3642D6C*	GME951005DXA*	34,600	25,600	15.0	12.2	1,150	4701112
	CHPF3642D6C*	A*VM961005DXB*	34,600	25,600	15.0	12.2	1,150	5621627
	CHPF3642D6C*+EEP		34,600	25,600	14.0	12.0	1,150	3706349
	CHPF3642D6C*+MBVC2000**-.1A*		35,000	26,000	15.0	12.5	1,200	4559622
	CHPF3743D6B*	GME950805CXA*	34,400	25,400	14.5	12.2	1,150	4701117
	CHPF3743D6B*	A*VC950905CXB*	34,400	25,400	14.5	12.2	1,150	5621569
	CHPF3743D6B*	G*VM960805CXB*	34,400	25,400	14.5	12.2	1,150	5621614
	CHPF3743D6B*	G*VC950905CXB*	34,400	25,400	14.5	12.2	1,150	5621570
	CHPF3743D6B*	A*VM960805CXB*	34,400	25,400	14.5	12.2	1,150	5621613
	CHPF3743D6B*+EEP+TXV		34,600	25,600	14.5	12.2	1,150	4216686
	CHPF3743D6B*+TXV	G*VC950905DXB*	34,400	25,400	15.0	12.2	1,180	5621578
	CHPF3743D6B*+TXV	A*VC950905DXB*	34,400	25,400	15.0	12.2	1,180	5621577
	CSCF4860N6D*	G*VC951155DXB*	34,600	25,600	14.5	12.2	1,225	5621593
	CSCF4860N6D*	G*VC950704CXB*	34,600	25,600	14.5	12.2	1,225	5621552
	CSCF4860N6D*+EEP+TXV		34,600	25,600	14.5	12.0	1,200	4767490

¹ BTU/h

² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	ARPT42D14A*		38,000	28,600	14.0	12.0	1,350	5360146
	ARPT48D14A*		39,000	29,400	14.0	12.0	1,300	5360147
	ARUF42C14A*		37,400	28,200	13.5	11.5	1,280	5383484
	ARUF48D14A*		38,000	28,600	14.0	12.0	1,350	5360148
	ASPF426016E*		40,000	30,200	15.0	12.5	1,400	4358306
	ASPT48D14A*		39,000	29,400	15.0	12.5	1,385	5796515
	ASPT60D14A*		39,000	29,400	15.0	12.5	1,385	5722769
	ASUF49C14A*		37,600	28,400	13.5	11.0	1,410	5620422
	ASUF49C14A*+TXV		37,600	28,400	13.8	11.2	1,410	5620423
	AVPTC426014A*		40,000	30,200	15.0	12.5	1,475	4431268
	CA*F3743*6D*+EEP+TXV		40,000	30,200	14.5	12.2	1,300	4415179
	CA*F3743*6D*+TXV	GME951005DXA*	40,000	30,200	14.5	12.2	1,480	4701080
	CA*F3743*6D*+TXV	A*VC950905CXB*	40,000	30,200	14.5	12.2	1,390	5621644
	CA*F3743*6D*+TXV	A*VC950915DXB*	40,000	30,200	14.5	12.2	1,390	5621658
	CA*F3743*6D*+TXV	G*VM960805DXB*	40,000	30,200	14.5	12.2	1,390	5621680
	CA*F3743*6D*+TXV	G*VM961005DXB*	40,000	30,200	14.5	12.2	1,480	5621686
	CA*F3743*6D*+TXV	A*VC950905DXB*	40,000	30,200	14.5	12.2	1,390	5621651
	CA*F3743*6D*+TXV	G*VM960805CXB*	40,000	30,200	14.5	12.2	1,390	5621674
	CA*F3743*6D*+TXV	GME950805CXA*	39,500	29,800	14.5	12.2	1,400	4703738
	CA*F3743*6D*+TXV	A*VC951155DXB*	40,000	30,200	14.5	12.2	1,480	5621662
	CA*F3743*6D*+TXV	A*VM961005DXB*	40,000	30,200	14.5	12.2	1,480	5621685
	CA*F3743*6D*+TXV	G*VC951155DXB*	40,000	30,200	14.5	12.2	1,480	5621663
	CA*F3743*6D*+TXV	G*VC950905CXB*	40,000	30,200	14.5	12.2	1,390	5621645
	CA*F3743*6D*+TXV	A*VM961155DXB*	40,000	30,200	14.5	12.2	1,480	5621691
	CA*F3743*6D*+TXV	G*VC950915DXB*	40,000	30,200	14.5	12.2	1,390	5621659
	CA*F3743*6D*+TXV	A*VM960805CXB*	40,000	30,200	14.5	12.2	1,390	5621673
SSX14 0421C*	CA*F3743*6D*+TXV	A*VM960805DXB*	40,000	30,200	14.5	12.2	1,390	5621679
	CA*F3743*6D*+TXV	G*VM961155DXB*	40,000	30,200	14.5	12.2	1,480	5621692
	CA*F3743*6D*+TXV	G*VC950905DXB*	40,000	30,200	14.5	12.2	1,390	5621652
	CA*F4860*6D*	GME951005DXA*	40,000	30,200	14.7	12.5	1,500	4701087
	CA*F4860*6D*	A*VC80805C*B*	39,000	29,400	14.0	12.0	1,400	5038886
	CA*F4860*6D*	G*VC80805C*B*	39,000	29,400	14.0	12.0	1,400	5039254
	CA*F4860*6D*	ADVC81005C*B*	37,800	28,600	14.0	12.0	1,260	5039055
	CA*F4860*6D*	G*VM960805CXB*	40,000	30,200	14.7	12.5	1,395	5621676
	CA*F4860*6D*	G*VM961155DXB*	40,000	30,200	14.7	12.5	1,500	5621694
	CA*F4860*6D*	G*VC950905DXB*	40,000	30,200	14.7	12.5	1,395	5621654
	CA*F4860*6D*	A*VC951155DXB*	40,000	30,200	14.7	12.5	1,500	5621664
	CA*F4860*6D*	A*VC950905DXB*	40,000	30,200	14.7	12.5	1,395	5621653
	CA*F4860*6D*	A*VM961005DXB*	40,000	30,200	14.7	12.5	1,500	5621687
	CA*F4860*6D*	ADVC80805C*B*	37,800	28,600	14.0	12.0	1,250	5039255
	CA*F4860*6D*	G*VC81005C*B*	39,000	29,400	14.0	12.0	1,370	5038914
	CA*F4860*6D*	A*VC81005C*B*	39,000	29,400	14.0	12.0	1,370	5039182
	CA*F4860*6D*	A*VC950714CXB*	40,000	30,200	14.0	12.0	1,475	5621642
	CA*F4860*6D*	A*VC950704CXB*	40,000	30,200	14.0	12.0	1,475	5621637
	CA*F4860*6D*	G*VC950704CXB*	40,000	30,200	14.0	12.0	1,475	5621638
	CA*F4860*6D*	A*VM960805DXB*	40,000	30,200	14.7	12.5	1,395	5621681
	CA*F4860*6D*	G*VC950714CXB*	40,000	30,200	14.0	12.0	1,475	5621643
	CA*F4860*6D*	G*VC950905CXB*	40,000	30,200	14.7	12.5	1,395	5621647
	CA*F4860*6D*	A*VC950915DXB*	40,000	30,200	14.7	12.5	1,395	5621660
	CA*F4860*6D*	G*VC950915DXB*	40,000	30,200	14.7	12.5	1,395	5621661
	CA*F4860*6D*	G*VC951155DXB*	40,000	30,200	14.7	12.5	1,500	5621665
	CA*F4860*6D*	A*VM960604CXB*	40,000	30,200	14.0	12.0	1,475	5621669
	CA*F4860*6D*	G*VM960604CXB*	40,000	30,200	14.0	12.0	1,475	5621670

See Notes on Page 37.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	CA*F4860*6D*	G*VM961005DXB*	40,000	30,200	14.7	12.5	1,500	5621688
	CA*F4860*6D*	A*VC950905CXB*	40,000	30,200	14.7	12.5	1,395	5621646
	CA*F4860*6D*	A*VM960805CXB*	40,000	30,200	14.7	12.5	1,395	5621675
	CA*F4860*6D*	G*VM960805DXB*	40,000	30,200	14.7	12.5	1,395	5621682
	CA*F4860*6D*	A*VM961155DXB*	40,000	30,200	14.7	12.5	1,500	5621693
	CA*F4860*6D*+EEP		40,000	30,200	14.0	12.0	1,450	4392983
	CA*F4860*6D*+MBVC2000**-1A*		40,000	30,200	15.0	12.5	1,400	3880329
	CA*F4860*6D*+TXV	G*E80805C*B*	38,000	28,600	14.5	12.0	1,425	5533318
	CA*F4860*6D*+TXV	GME950805CXA*	39,500	29,800	14.5	12.0	1,400	4703746
	CA*F4961*6D*+EEP		40,000	30,200	14.5	12.2	1,275	4431653
	CAPT4961*4A*+EEP		39,000	29,400	14.0	12.0	1,275	5611318
	CAPT4961*4A*+MBVC2000**-1A*		39,500	29,800	15.0	12.5	1,300	5611319
	CHPF3743D6B*+EEP+TXV		40,000	30,200	14.5	12.2	1,350	3698221
	CHPF4860D6D*	G*VC80805C*B*	39,000	29,400	14.0	12.0	1,400	5038885
	CHPF4860D6D*	A*VC81005C*B*	39,000	29,400	14.0	12.0	1,370	5039266
	CHPF4860D6D*	G*E80805C*B*	38,000	28,600	14.0	12.0	1,400	5070572
	CHPF4860D6D*	G*VM960805CXB*	40,000	30,200	15.0	12.5	1,400	5621678
	CHPF4860D6D*	G*VM961005DXB*	40,000	30,200	15.0	12.5	1,500	5621690
	CHPF4860D6D*	A*VM960805DXB*	40,000	30,200	15.0	12.5	1,400	5621683
	CHPF4860D6D*	A*VM961155DXB*	40,000	30,200	15.0	12.5	1,500	5621695
	CHPF4860D6D*	G*VC950905CXB*	40,000	30,200	15.0	12.5	1,400	5621649
	CHPF4860D6D*	A*VC80805C*B*	39,000	29,400	14.0	12.0	1,400	5039256
SSX14 0421C* (cont.)	CHPF4860D6D*	GME951005DXA*	40,000	30,200	15.0	12.5	1,500	4701121
	CHPF4860D6D*	G*VC81005C*B*	39,000	29,400	14.0	12.0	1,370	5038896
	CHPF4860D6D*	A*VC950905CXB*	40,000	30,200	15.0	12.5	1,400	5621648
	CHPF4860D6D*	G*VC950905DXB*	40,000	30,200	15.0	12.5	1,400	5621656
	CHPF4860D6D*	G*VM960805DXB*	40,000	30,200	15.0	12.5	1,400	5621684
	CHPF4860D6D*	A*VC950905DXB*	40,000	30,200	15.0	12.5	1,400	5621655
	CHPF4860D6D*	G*VC951155DXB*	40,000	30,200	15.0	12.5	1,500	5621667
	CHPF4860D6D*	A*VM960805CXB*	40,000	30,200	15.0	12.5	1,400	5621677
	CHPF4860D6D*	A*VC950704CXB*	40,000	30,200	14.0	12.0	1,470	5621639
	CHPF4860D6D*	G*VC950704CXB*	40,000	30,200	14.0	12.0	1,470	5621640
	CHPF4860D6D*	A*VM960604CXB*	40,000	30,200	14.0	12.0	1,470	5621671
	CHPF4860D6D*	G*VM960604CXB*	40,000	30,200	14.0	12.0	1,470	5621672
	CHPF4860D6D*	A*VC951155DXB*	40,000	30,200	15.0	12.5	1,500	5621666
	CHPF4860D6D*	A*VM961005DXB*	40,000	30,200	15.0	12.5	1,500	5621689
	CHPF4860D6D*	G*VM961155DXB*	40,000	30,200	15.0	12.5	1,500	5621696
	CHPF4860D6D*+EEP		40,000	30,200	14.0	12.0	1,450	3698226
	CHPF4860D6D*+MBVC2000**-1A*		40,000	30,200	15.0	12.5	1,400	3698228
	CHPF4860D6D*+TXV	GME950805CXA*	39,500	29,800	15.0	12.0	1,400	4703750
	CSCF4860N6D*	G*VC950905DXB*	39,000	29,400	15.0	12.5	1,450	5621657
	CSCF4860N6D*	G*VC950905CXB*	39,000	29,400	15.0	12.5	1,450	5621650
	CSCF4860N6D*	G*VC950704CXB*	39,000	29,400	14.5	12.2	1,400	5621641
	CSCF4860N6D*	G*VC951155DXB*	39,000	29,400	15.0	12.5	1,425	5621668
	CSCF4860N6D*+EEP		39,000	29,400	14.0	12.0	1,450	4767497
	CSCF4860N6D*+EEP+TXV		39,000	29,400	14.5	12.2	1,450	4767498

See Notes on Page 37.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	ARPT48D14A*		45,000	33,800	14.0	12.0	1,500	5360150
	ARPT60D14A*		45,000	33,800	14.0	12.0	1,500	5360151
	ARUF48D14A*		44,500	33,400	13.5	11.5	1,480	5360152
	ARUF48D14A*+TXV		44,500	33,400	13.5	11.5	1,480	5383486
	ARUF60D14A*		44,500	33,400	13.5	11.5	1,450	5360153
	ARUF60D14A*+TXV		44,500	33,400	13.5	11.5	1,450	5383488
	ASPF426016E*		47,000	35,200	15.0	12.5	1,600	4887679
	ASPT48D14A*		47,000	35,200	15.0	12.5	1,600	5796514
	ASPT60D14A*		47,000	35,200	15.0	12.5	1,600	5722753
	ASUF49C14A*		43,000	32,200	13.5	11.0	1,435	5620413
	ASUF49C14A*+TXV		43,000	32,200	13.8	11.0	1,435	5620414
	AVPTC426014A*		46,000	34,600	14.5	12.2	1,575	4431276
	CA*F4860*6D*	G*VC951155DXB*	45,500	34,200	15.0	12.5	1,400	5621710
	CA*F4860*6D*	A*VM961005DXB*	45,500	34,200	15.0	12.5	1,400	5621722
	CA*F4860*6D*	G*VC950905CXB*	45,500	34,200	15.0	12.5	1,330	5621698
	CA*F4860*6D*	A*VC950905DXB*	45,500	34,200	15.0	12.5	1,420	5621702
	CA*F4860*6D*	G*VM960805CXB*	45,500	34,200	15.0	12.5	1,330	5621715
	CA*F4860*6D*	A*VC950915DXB*	45,500	34,200	15.0	12.5	1,550	5621707
	CA*F4860*6D*	G*VC950905DXB*	45,500	34,200	15.0	12.5	1,420	5621703
	CA*F4860*6D*	A*VM961155DXB*	45,500	34,200	15.0	12.5	1,400	5621726
	CA*F4860*6D*	A*VM960805CXB*	45,500	34,200	15.0	12.5	1,330	5621714
	CA*F4860*6D*	G*VM960805DXB*	45,500	34,200	15.0	12.5	1,550	5621719
SSX14 0481B*	CA*F4860*6D*	A*VC951155DXB*	45,500	34,200	15.0	12.5	1,400	5621709
	CA*F4860*6D*	G*VM961155DXB*	45,500	34,200	15.0	12.5	1,400	5621727
	CA*F4860*6D*	A*VC950905CXB*	45,500	34,200	15.0	12.5	1,330	5621697
	CA*F4860*6D*	G*VC950915DXB*	45,500	34,200	15.0	12.5	1,550	5621708
	CA*F4860*6D*	A*VM960805DXB*	45,500	34,200	15.0	12.5	1,550	5621718
	CA*F4860*6D*	G*VM961005DXB*	45,500	34,200	15.0	12.5	1,400	5621723
	CA*F4860*6D*+EEP		45,500	34,200	14.0	12.0	1,550	4323060
	CA*F4860*6D*+EEP+TXV		45,500	34,200	14.0	12.0	1,550	4323061
	CA*F4860*6D*+MBVC2000**-1A*		46,000	34,600	15.0	13.0	1,600	4323063
	CA*F4860*6D*+TXV	GME950805CXA*	45,000	33,800	15.0	12.5	1,550	4703756
	CA*F4860*6D*+TXV	G*E80805C*B*	45,000	33,800	14.5	12.0	1,480	5038826
	CA*F4860*6D*+TXV	GME951005DXA*	45,000	33,800	15.0	12.0	1,650	4703688
	CA*F4860*6D*+TXV	G*E81005C*B*	45,500	34,200	14.5	12.0	1,570	5038953
	CA*F4961*6D*+EEP+TXV		46,000	34,600	14.5	12.0	1,550	4431655
	CA*F4961*6D*+MBVC2000**-1A*+TXV		46,000	34,600	15.0	12.5	1,600	4431676
	CAPT4961*4A*+EEP		46,000	34,600	14.0	11.5	1,550	5611387
	CAPT4961*4A*+MBVC1600**-1A*		45,000	33,800	14.5	12.0	1,550	5611388
	CAPT4961*4A*+MBVC2000**-1A*		45,000	33,800	14.5	12.0	1,595	5611389
	CHPF4860D6D*	A*VC950905DXB*	45,500	34,200	15.0	12.5	1,420	5621704
	CHPF4860D6D*	G*VC950905DXB*	45,500	34,200	15.0	12.5	1,420	5621705
	CHPF4860D6D*	A*VC951155DXB*	45,500	34,200	15.0	12.5	1,400	5621711
	CHPF4860D6D*	A*VM960805DXB*	45,500	34,200	15.0	12.5	1,550	5621720
	CHPF4860D6D*	G*VC950905CXB*	45,500	34,200	15.0	12.5	1,440	5621700

See Notes on Page 37.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
SSX14 0481B* (cont.)	CHPF4860D6D*	G*VM961155DXB*	45,500	34,200	15.0	12.5	1,400	5621729
	CHPF4860D6D*	A*VM961155DXB*	45,500	34,200	15.0	12.5	1,400	5621728
	CHPF4860D6D*	G*VC951155DXB*	45,500	34,200	15.0	12.5	1,400	5621712
	CHPF4860D6D*	A*VM960805CXB*	45,500	34,200	15.0	12.5	1,440	5621716
	CHPF4860D6D*	A*VM961005DXB*	45,500	34,200	15.0	12.5	1,400	5621724
	CHPF4860D6D*	G*VM960805CXB*	45,500	34,200	15.0	12.5	1,440	5621717
	CHPF4860D6D*	G*VM960805DXB*	45,500	34,200	15.0	12.5	1,550	5621721
	CHPF4860D6D*	A*VC950905CXB*	45,500	34,200	15.0	12.5	1,440	5621699
	CHPF4860D6D*	G*VM961005DXB*	45,500	34,200	15.0	12.5	1,400	5621725
	CHPF4860D6D*+EEP		46,000	34,600	14.0	12.0	1,550	4323075
	CHPF4860D6D*+EEP+TXV		46,000	34,600	14.5	12.0	1,550	4323076
	CHPF4860D6D*+MBVC2000**-1A*		46,000	34,600	15.5	13.0	1,600	4323077
	CHPF4860D6D*+TXV	G*E80805C*B*	45,500	34,200	14.5	12.0	1,480	5038852
	CHPF4860D6D*+TXV	G*VC80805C*B*	45,500	34,200	15.0	12.0	1,510	5039038
	CHPF4860D6D*+TXV	A*VC81005C*B*	45,500	34,200	15.0	12.0	1,530	5038854
	CHPF4860D6D*+TXV	G*E81005C*B*	45,500	34,200	14.5	12.0	1,570	5039156
	CHPF4860D6D*+TXV	A*VC80805C*B*	45,500	34,200	15.0	12.0	1,510	5038954
	CHPF4860D6D*+TXV	GME951005DXA*	45,000	33,800	15.0	12.0	1,650	4703690
	CHPF4860D6D*+TXV	GME950805CXA*	45,000	33,800	15.0	12.5	1,550	4703758
	CHPF4860D6D*+TXV	G*VC81005C*B*	45,500	34,200	15.0	12.0	1,530	5038853
	CSCF4860N6D*	G*VC951155DXB*	45,500	34,200	14.5	12.3	1,550	5621713
	CSCF4860N6D*	G*VC950905CXB*	45,500	34,200	14.5	12.3	1,575	5621701
	CSCF4860N6D*	G*VC950905DXB*	45,500	34,200	14.5	12.3	1,575	5621706
CSCF4860N6D*+EEP		46,000	34,600	14.0	12.0	1,600	4767506	
SSX14 0601A*	ARPT48D14A*		56,000	45,500	13.5	11.5	1,775	5360154
	ARPT60D14A*		56,000	45,500	13.5	11.5	1,775	5360190
	ARUF48D14A*		57,000	46,500	13.5	11.5	1,765	5360155
	ARUF48D14A*+TXV		57,000	46,500	13.5	11.5	1,765	5383490
	ASPF426016E*		57,000	46,500	14.5	12.0	1,800	4358273
	ASPF426016E*+TXV		56,000	45,500	15.0	12.5	1,800	4358274
	ASPT60D14A*		57,000	46,500	14.3	12.3	1,745	5722559
	ASUF49C14A*		52,000	42,000	13.0	11.0	1,500	5620415
	ASUF49C14A*+TXV		52,000	42,000	13.2	11.0	1,500	5620416
	ASUF59D14A*		57,000	46,500	14.0	12.0	1,580	5603321
	ASUF59D14A*+TXV		57,000	46,500	14.3	12.3	1,745	5722604
	AVPTC426014A*		56,000	45,500	15.0	12.5	1,800	4431286
	CA*F4860*6D*	A*VM960805DXB*	56,000	45,500	13.5	11.5	1,800	5621754
	CA*F4860*6D*	G*VM961005DXB*	56,000	45,500	13.5	11.5	1,800	5621759
	CA*F4860*6D*	A*VM961155DXB*	56,000	45,500	13.5	11.5	1,800	5621762
	CA*F4860*6D*	A*VC950905CXB*	56,000	45,500	13.5	11.5	1,800	5621730
	CA*F4860*6D*	A*VC950915DXB*	56,000	45,500	13.5	11.5	1,800	5621742
	CA*F4860*6D*	G*VC950915DXB*	56,000	45,500	13.5	11.5	1,800	5621743
	CA*F4860*6D*	G*VM960805CXB*	56,000	45,500	13.5	11.5	1,800	5621751
	CA*F4860*6D*	G*VM960805DXB*	56,000	45,500	13.5	11.5	1,800	5621755
	CA*F4860*6D*	G*VC950905DXB*	56,000	45,500	13.5	11.5	1,800	5621737

See Notes on Page 37.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	CA*F4860*6D*	A*VM961005DXB*	56,000	45,500	13.5	11.5	1,800	5621758
	CA*F4860*6D*	A*VC950905DXB*	56,000	45,500	13.5	11.5	1,800	5621736
	CA*F4860*6D*	G*VM961155DXB*	56,000	45,500	13.5	11.5	1,800	5621763
	CA*F4860*6D*	G*VC950905CXB*	56,000	45,500	13.5	11.5	1,800	5621731
	CA*F4860*6D*	A*VC951155DXB*	56,000	45,500	13.5	11.5	1,800	5621744
	CA*F4860*6D*	G*VC951155DXB*	56,000	45,500	13.5	11.5	1,800	5621745
	CA*F4860*6D*	A*VM960805CXB*	56,000	45,500	13.5	11.5	1,800	5621750
	CA*F4860*6D*+EEP		56,000	45,500	14.0	12.0	1,800	4945871
	CA*F4860*6D*+MBR2000** -1		56,000	45,500	14.0	12.0	1,800	3880313
	CA*F4860*6D*+MBVC2000** -1A*		56,000	45,500	15.0	12.5	1,800	3880331
	CA*F4961*6D*+EEP	GME950805CXA*	55,000	44,500	14.2	12.0	1,550	5319926
	CA*F4961*6D*+EEP	GME951005DXA*	55,000	44,500	14.2	12.0	1,550	5319924
	CA*F4961*6D*+EEP	G*E80805C*B*	55,000	44,500	14.2	12.0	1,550	5319925
	CA*F4961*6D*+EEP	G*E81005C*B*	55,000	44,500	14.2	12.0	1,550	5319923
	CA*F4961*6D*+EEP+TXV		56,000	45,500	14.5	12.0	1,800	4431656
	CA*F4961*6D*+EEP+TXV	G*E81005C*B*	55,000	44,500	14.5	12.0	1,550	5319927
	CA*F4961*6D*+EEP+TXV	GME950805CXA*	55,000	44,500	14.5	12.0	1,550	5319930
	CA*F4961*6D*+EEP+TXV	GME951005DXA*	55,000	44,500	14.5	12.0	1,550	5319928
	CA*F4961*6D*+EEP+TXV	G*E80805C*B*	55,000	44,500	14.5	12.0	1,550	5319929
	CA*F4961*6D*+TXV	ADVC80805C*B*	57,000	46,500	14.5	12.2	1,780	5039130
	CA*F4961*6D*+TXV	A*VC81005C*B*	57,000	46,500	14.5	12.2	1,800	5038955
SSX14	CA*F4961*6D*+TXV	G*VC81005C*B*	57,000	46,500	14.5	12.2	1,800	5039129
0601A*	CA*F4961*6D*+TXV	ADVC81005C*B*	57,000	46,500	14.5	12.2	1,820	5038855
(cont.)	CA*F4961*6D*+TXV	A*VC80805C*B*	57,000	46,500	14.5	12.2	1,800	5039039
	CA*F4961*6D*+TXV	G*VC80805C*B*	57,000	46,500	14.5	12.2	1,800	5039239
	CAPT4961*4A*	A*VC80805C*B*	57,000	46,500	14.0	12.0	1,800	5520673
	CAPT4961*4A*	ADVC81005C*B*	57,000	46,500	14.5	12.0	1,815	5520676
	CAPT4961*4A*	A*VC81005C*B*	57,000	46,500	14.0	12.0	1,795	5520674
	CAPT4961*4A*	G*VC80805C*B*	57,000	46,500	14.0	12.0	1,800	5520677
	CAPT4961*4A*	ADVC80805C*B*	57,000	46,500	14.5	12.0	1,775	5520675
	CAPT4961*4A*	G*VC81005C*B*	57,000	46,500	14.0	12.0	1,795	5520678
	CAPT4961*4A*+EEP		56,000	45,500	14.0	12.0	1,800	5520679
	CAPT4961*4A*+MBVC2000** -1A*		57,000	46,500	14.5	12.0	1,805	5611390
	CHPF4860D6D*	A*VC951155DXB*	56,000	45,500	13.5	11.5	1,800	5621746
	CHPF4860D6D*	G*VM961005DXB*	56,000	45,500	13.5	11.5	1,800	5621761
	CHPF4860D6D*	G*VM961155DXB*	56,000	45,500	13.5	11.5	1,800	5621765
	CHPF4860D6D*	A*VM960805CXB*	56,000	45,500	13.5	11.5	1,800	5621752
	CHPF4860D6D*	G*VM960805CXB*	56,000	45,500	13.5	11.5	1,800	5621753
	CHPF4860D6D*	G*VM960805DXB*	56,000	45,500	13.5	11.5	1,800	5621757
	CHPF4860D6D*	G*VC950905CXB*	56,000	45,500	13.5	11.5	1,800	5621733
	CHPF4860D6D*	A*VC950905CXB*	56,000	45,500	13.5	11.5	1,800	5621732
	CHPF4860D6D*	G*VC951155DXB*	56,000	45,500	13.5	11.5	1,800	5621747
	CHPF4860D6D*	A*VM960805DXB*	56,000	45,500	13.5	11.5	1,800	5621756
	CHPF4860D6D*	A*VC950905DXB*	56,000	45,500	13.5	11.5	1,800	5621738
	CHPF4860D6D*	G*VC950905DXB*	56,000	45,500	13.5	11.5	1,800	5621739

See Notes on Page 37.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
SSX14 0601A* (cont.)	CHPF4860D6D*	A*VM961155DXB*	56,000	45,500	13.5	11.5	1,800	5621764
	CHPF4860D6D*	A*VM961005DXB*	56,000	45,500	13.5	11.5	1,800	5621760
	CHPF4860D6D*+EEP		56,000	45,500	14.0	12.0	1,800	3300080
	CHPF4860D6D*+EEP	GME951005DXA*	55,000	44,500	14.2	12.0	1,550	5319941
	CHPF4860D6D*+EEP	GME950805CXA*	55,000	44,500	14.2	12.0	1,550	5319943
	CHPF4860D6D*+EEP	G*E81005C*B*	55,000	44,500	14.2	12.0	1,550	5319940
	CHPF4860D6D*+EEP	G*E80805C*B*	55,000	44,500	14.2	12.0	1,550	5319942
	CHPF4860D6D*+EEP+TXV		56,000	45,500	14.5	12.0	1,800	3367401
	CHPF4860D6D*+EEP+TXV	G*E81005C*B*	55,000	44,500	14.5	12.0	1,550	5319944
	CHPF4860D6D*+EEP+TXV	G*E80805C*B*	55,000	44,500	14.5	12.0	1,550	5319946
	CHPF4860D6D*+EEP+TXV	GME950805CXA*	55,000	44,500	14.5	12.0	1,550	5319947
	CHPF4860D6D*+EEP+TXV	GME951005DXA*	55,000	44,500	14.5	12.0	1,550	5319945
	CHPF4860D6D*+MBR2000**-1		56,000	45,500	14.0	12.0	1,800	3300162
	CHPF4860D6D*+MBVC2000**-1A*		56,000	45,500	15.0	12.5	1,800	4559590
	CHPF4860D6D*+TXV	A*VC80805C*B*	57,000	46,500	14.5	12.2	1,800	5038837
	CHPF4860D6D*+TXV	G*VC80805C*B*	57,000	46,500	14.5	12.2	1,800	5038856
	CHPF4860D6D*+TXV	A*VC81005C*B*	57,000	46,500	14.5	12.2	1,800	5038992
	CHPF4860D6D*+TXV	G*VC81005C*B*	57,000	46,500	14.5	12.2	1,800	5038836
	CSCF4860N6D*	A*VC950905CXB*	56,000	45,500	13.5	11.5	1,675	5621734
	CSCF4860N6D*	A*VC950905DXB*	56,000	45,500	13.5	11.5	1,675	5621740
	CSCF4860N6D*	G*VC950905CXB*	56,000	45,500	13.5	11.5	1,675	5621735
	CSCF4860N6D*	G*VC950905DXB*	56,000	45,500	13.5	11.5	1,675	5621741
	CSCF4860N6D*	G*VC951155DXB*	56,000	45,500	13.5	11.5	1,850	5621749
	CSCF4860N6D*	A*VC951155DXB*	56,000	45,500	13.5	11.5	1,850	5621748
	CSCF4860N6D*+EEP	G*E81005C*B*	55,000	44,500	14.2	12.0	1,550	5320200
	CSCF4860N6D*+EEP	GME951005DXA*	55,000	44,500	14.2	12.0	1,550	5320201
	CSCF4860N6D*+EEP	G*E80805C*B*	55,000	44,500	14.2	12.0	1,550	5320202
	CSCF4860N6D*+EEP		56,000	45,500	14.0	11.8	1,800	4767513
	CSCF4860N6D*+EEP	GME950805CXA*	55,000	44,500	14.2	12.0	1,550	5319948
	CSCF4860N6D*+EEP+TXV	G*E81005C*B*	55,000	44,500	14.5	12.0	1,550	5320203
	CSCF4860N6D*+EEP+TXV	GME951005DXA*	55,000	44,500	14.5	12.0	1,550	5320204
	CSCF4860N6D*+EEP+TXV	GME950805CXA*	55,000	44,500	14.5	12.0	1,550	5319949
	CSCF4860N6D*+EEP+TXV	G*E80805C*B*	55,000	44,500	14.5	12.0	1,550	5320205

¹ BTU/h


² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES


- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

DIMENSIONS

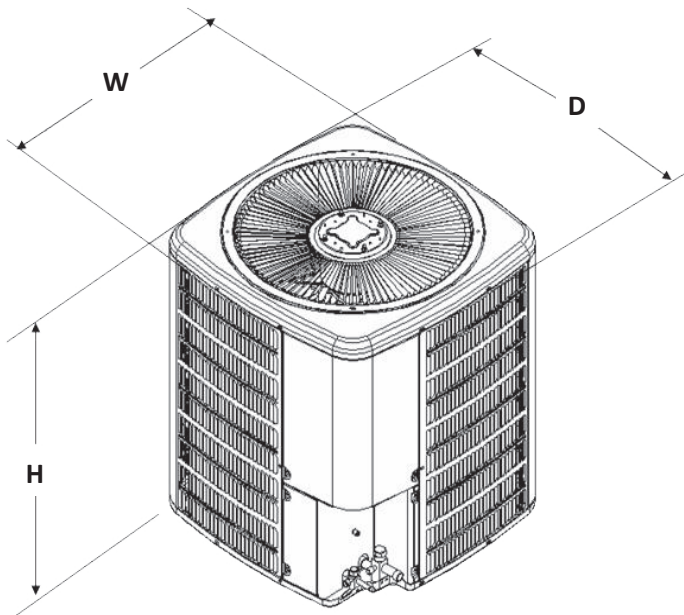

MODEL	DIMENSIONS		
	W"	D"	H"
SSX140181B	26	26	27½
SSX140241B	26	26	32½
SSX140301B	29	29	32½
SSX140361A	29	29	34¼
SSX140361B	29	29	32½
SSX140421B	29	29	38¼
SSX140421C	29	29	36¼
SSX140481A	35½	35½	38¼
SSX140481B	35½	35½	36¼
SSX140601A	35½	35½	38¼

SSX14 WIRING DIAGRAM

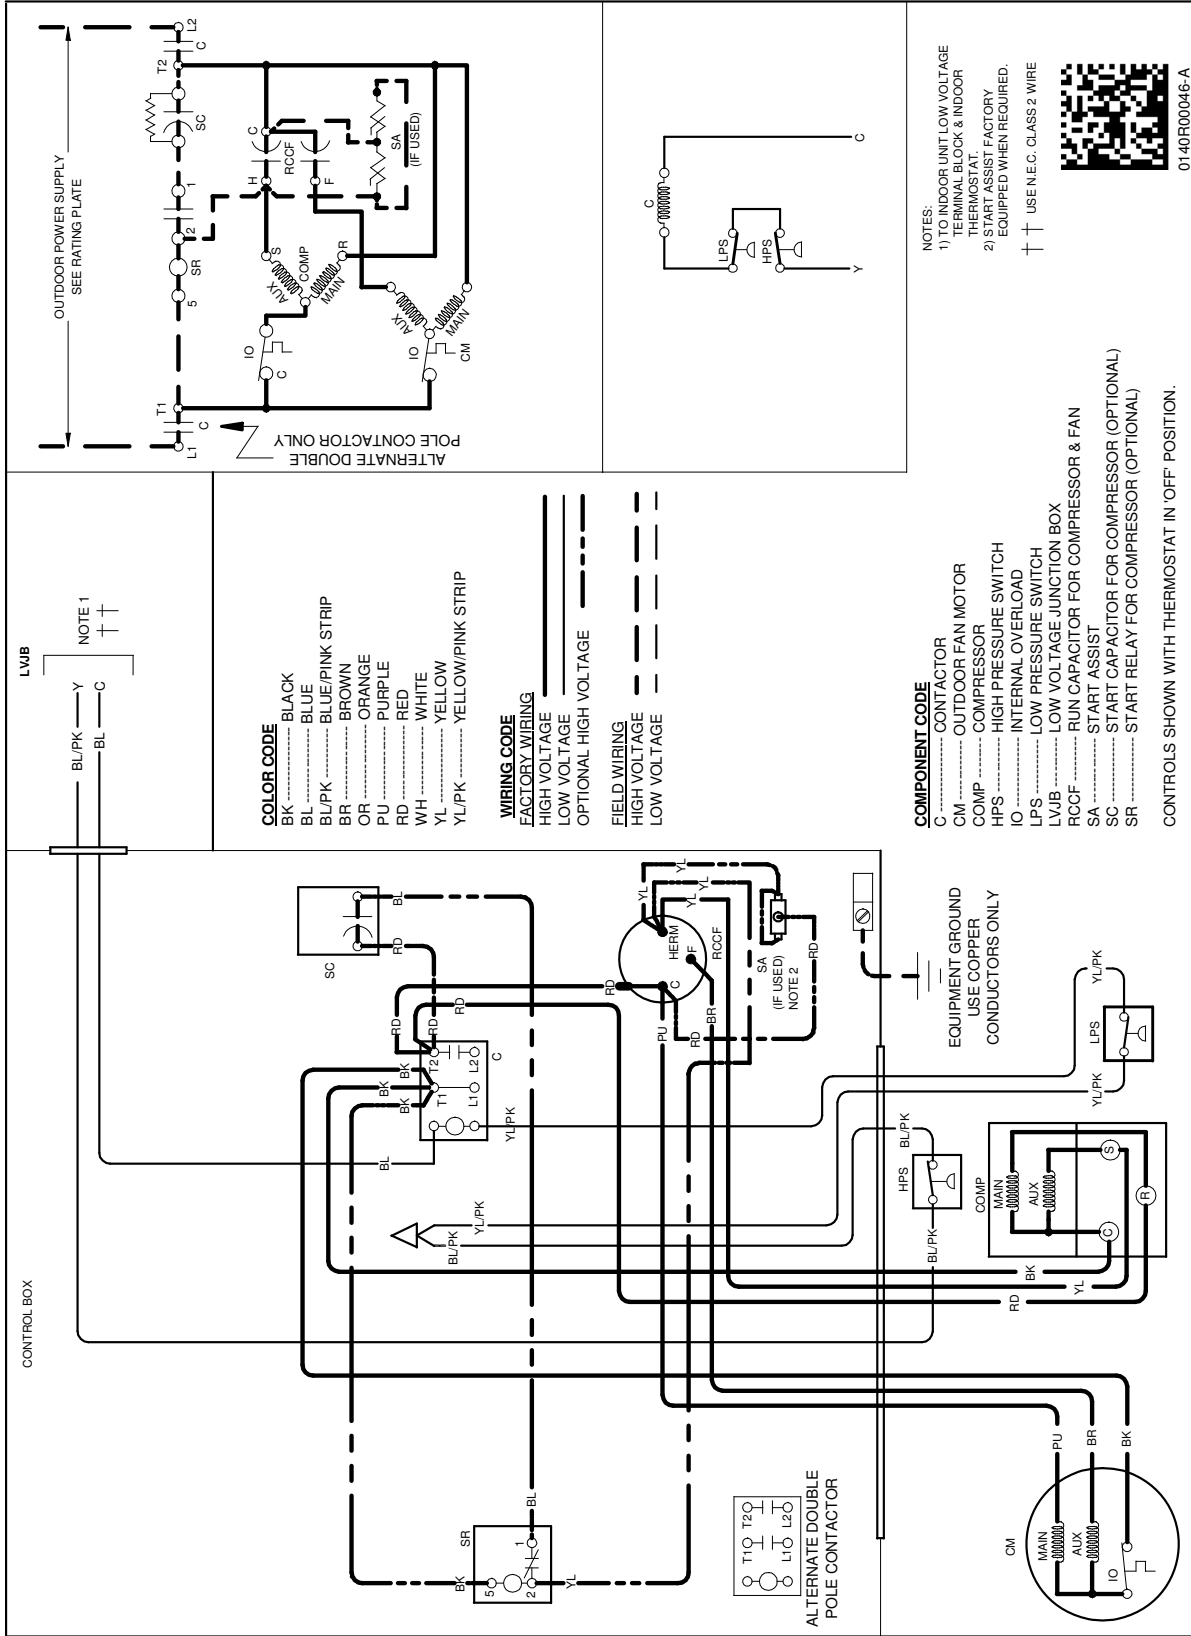

WARNING

⚡

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

NOTES:

- 1) TO INDOOR UNIT LOW VOLTAGE TERMINAL BLOCK & INDOOR THERMOSTAT.
- 2) START ASSIST FACTORY EQUIPPED WHEN REQUIRED.

† † USE N.E.C. CLASS 2 WIRE

01-40R00046-A

ACCESSORIES

MODEL	DESCRIPTION	SSX14 018	SSX14 024	SSX14 030	SSX14 036	SSX14 042	SSX14 048	SSX14 060
ABK-20	Anchor Bracket Kit *	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X
LSK01A	Liquid Line Solenoid Kit	X	X	X	X	X	X	X
OT18-60A	Outdoor Thermostat / Lockout Stat	X	X	X	X	X	X	X
TX2N4 ²	TXV Kit	X						
TX2N4A ²	TXV Kit	X	X					
TX3N4 ²	TXV Kit			X	X			
TX5N4 ²	TXV Kit					X	X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.