



Air Conditioning & Heating

SSZ14

HIGH-EFFICIENCY

SPLIT SYSTEM HEAT PUMP

Up to 15 SEER & 8.5 HSPF

COOLING CAPACITY: 18,000 to 57,600 BTU/H

HEATING CAPACITY: 18,000 to 59,000 BTU/H



Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	4
Expanded Heating Data	20
AHRI Ratings	22
Wiring Diagrams	34
Dimensions	36
Accessories	36

Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressor
- High density foam compressor sound blanket
- Expanded CoreSense™ diagnostics built in
- SmartShift® technology with short-cycle protection
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed compressor crankcase heater
- Factory-installed coil and ambient temperature sensors
- Factory-installed suction-line accumulator
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Copper tube/enhanced aluminum fin coil
- AHRI Certified; ETL Listed

Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



ENERGY STAR® and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. ENERGY STAR products are third-party certified by an EPA-recognized Certification Body. Products that earn the ENERGY STAR prevent greenhouse gas emissions by meeting strict energy efficiency guidelines set by the U.S. Environmental Protection Agency. Proper sizing and installation of equipment is critical to achieving optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home) and the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

NOMENCLATURE

	S	S	Z	14	036	1	A	A		
	1	2	3	4,5	6,7,8	9	10	11		
Brand	S Goodman® (High Feature Set Model)									Engineering * Minor Revision
Product Category	S Split System									Engineering * Major Revision
Unit Type	X Condenser R-410A Z Heat Pump R-410A									Electrical
										1 208/230 V, 1 Phase, 60 Hz
										2 220/240 V, 1 Phase, 50 Hz
										3 208/230 V, 3 Phase, 60 Hz
										4 460 V, 3 Phase, 60 Hz
Efficiency	13 13 SEER 14 14 SEER 16 16 SEER									Nominal Capacity
										018 1½ Tons
										042 3½ Tons
										024 2 Tons
										048 4 Tons
										030 2½ Tons
										060 5 Tons
										036/38 3 Tons

* Neither used for order entry or inventory management.



SPECIFICATIONS

	SSZ14 0181A* ^{ES}	SSZ14 0241A* ^{ES}	SSZ14 0301A* ^{ES}	SSZ14 0361B*	SSZ14 0381A*	SSZ14 0421A*	SSZ14 0481A*	SSZ14 0601A*
NOMINAL CAPACITIES								
Cooling (BTU/h)	18,000	24,000	30,000	36,000	36,000	42,000	48,000	60,000
Heating (BTU/h)	18,000	24,000	30,000	36,000	36,000	42,000	48,000	60,000
Decibels	70	72	72	74	74	73	74	75
COMPRESSOR								
RLA	9.0	12.8	14.1	14.1	14.1	17.9	19.9	26.4
LRA	48.0	58.3	73.0	77.0	77	112.0	109.0	134.0
CONDENSER FAN MOTOR								
Horsepower	1/12	1/6	1/6	¼	1/6	¼	¼	¼
FLA	0.6	1.1	1.0	1.5	1	1.5	1.5	1.5
REFRIGERATION SYSTEM								
Refrigerant Line Size ¹								
Liquid Line Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Line Size ("O.D.)	¾"	¾"	¾"	⅞"	⅞"	1⅞"	1⅞"	1⅞"
Refrigerant Connection Size								
Liquid Valve Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Valve Size ("O.D.)	¾"	¾"	¾"	¾"	⅞"	⅞"	⅞"	⅞"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	130	153	175	163	201	207	234	255
ELECTRICAL DATA								
Volts-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ²	11.9	17.1	18.6	19.1	18.6	23.9	26.4	34.5
Max. Overcurrent Protection ³	20	25	30	30	30	40	45	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197/253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"
EQUIPMENT WEIGHT (LBS)								
	173	183	185	192	253	246	278	292
SHIP WEIGHT (LBS)								
	191	201	203	210	275	268	300	314

¹ Tested and rated in accordance with AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

^{ES} Energy Star Rated

NOTES

- Always check the rating plate for electrical data on the unit being installed.
- Installer will need to supply ⅞" to 1⅞" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of ⅜" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

COOLING DATA — SSZ140381A* / ASPT42C14A*

IDB	OUTDOOR AMBIENT TEMPERATURE												105°F												115°F											
	65°F						75°F						85°F						95°F						105°F						115°F					
	ENTERING INDOOR WET BULB TEMPERATURE																																			
70	1050	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71										
		S/T	30.4	31.5	34.5	-	29.0	30.0	32.9	-	28.2	29.3	32.1	-	26.8	27.8	30.5	-	24.9	25.8	28.2	-	0.81	0.68	0.47	-										
		ΔT	0.71	0.59	0.41	-	0.75	0.63	0.43	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.81	0.68	0.47	-	18	15	12	-										
	1175	kW	2.68	2.68	2.68	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-										
		Amps	10.9	10.9	10.9	-	10.9	11.0	11.0	-	11.0	11.0	11.0	-	11.0	11.0	11.1	-	11.1	11.1	11.1	-	11.1	11.1	11.1	-										
		Lo PR	211	228	240	-	237	255	270	-	270	290	307	-	307	331	349	-	346	372	393	-	382	411	434	-										
	1350	MBh	32.0	33.1	36.3	-	31.2	32.4	35.5	-	30.5	31.6	34.6	-	29.7	30.8	33.8	-	28.2	29.3	32.1	-	26.2	27.1	29.7	-										
		S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-										
		ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-										
	75	1050	kW	2.68	2.68	2.68	-	2.68	2.68	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-									
			Amps	10.9	10.9	10.9	-	10.9	10.9	10.9	-	10.9	11.0	11.0	-	11.0	11.0	11.1	-	11.0	11.1	11.1	-	11.1	11.1	11.1	-									
			Lo PR	216	232	245	-	242	261	275	-	275	296	313	-	314	338	356	-	353	380	401	-	390	420	443	-									
1175		MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.7	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	27.0	27.9	30.6	-										
		S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.47	-	0.85	0.71	0.49	-	0.88	0.73	0.51	-	0.89	0.74	0.51	-										
		ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-										
1350		kW	2.68	2.68	2.68	-	2.68	2.68	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-										
		Amps	10.9	10.9	10.9	-	10.9	10.9	10.9	-	11.0	11.0	11.0	-	11.0	11.0	11.1	-	11.0	11.1	11.1	-	11.1	11.1	11.1	-										
		Lo PR	218	235	248	-	245	263	278	-	278	299	316	-	317	341	360	-	356	384	405	-	394	424	447	-										

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

COOLING DATA — SSZ140601A* / CA*F4860*6A*+TXV / MBE2000** -1 (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
2081	MBh	57.3	58.6	62.6	66.9	56.0	57.2	61.1	65.3	54.6	55.8	59.6	63.8	53.3	54.5	58.2	62.2	50.6	51.7	55.3	59.1	46.9	47.9	51.2	54.7
	S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.81	0.61
	ΔT	23	22	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	23	20	16	21	21	18	15
	kW	3.69	3.76	3.89	4.01	3.97	4.06	4.19	4.33	4.23	4.32	4.47	4.62	4.45	4.55	4.71	4.87	4.64	4.75	4.91	5.08	4.81	4.92	5.09	5.26
	Amps	7.8	8.2	8.6	9.2	9.0	9.3	9.9	10.5	10.3	10.7	11.3	11.9	11.4	11.9	12.5	13.2	12.6	13.0	13.7	14.5	13.7	14.2	14.9	15.7
80	MBh	55.6	56.9	60.7	64.9	54.3	55.5	59.3	63.4	53.0	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.2	53.7	57.4	45.5	46.5	49.7	53.2
	S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	24	24	20	16	23	22	19	15
	kW	3.66	3.73	3.85	3.98	3.94	4.03	4.16	4.30	4.19	4.29	4.43	4.58	4.42	4.52	4.67	4.82	4.61	4.71	4.87	5.03	4.77	4.88	5.04	5.22
	Amps	7.7	8.0	8.5	9.1	8.8	9.2	9.7	10.3	10.1	10.5	11.1	11.8	11.3	11.7	12.3	13.0	12.4	12.9	13.5	14.3	13.5	14.0	14.7	15.5
85	MBh	51.4	52.5	56.1	59.9	50.2	51.3	54.8	58.5	49.0	50.0	53.5	57.1	47.8	48.8	52.1	55.7	45.4	46.4	49.5	53.0	42.0	43.0	45.9	49.1
	S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75	0.56
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	16
	kW	3.57	3.64	3.76	3.88	3.84	3.93	4.06	4.19	4.09	4.18	4.32	4.46	4.31	4.40	4.55	4.70	4.49	4.59	4.74	4.90	4.65	4.75	4.91	5.08
	Amps	7.3	7.6	8.1	8.6	8.4	8.8	9.3	9.9	9.7	10.1	10.6	11.3	10.8	11.2	11.8	12.5	11.9	12.3	13.0	13.7	13.0	13.4	14.1	14.9

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. fan)

HEATING DATA

SSZ140181A* / CA*F3131*6A*+TXV / MBR800**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	22.6	21.4	20.2	18.8	18.0	17.4	16.2	14.9	12.8	11.8	10.9	10.3	9.9	8.9	7.9	6.9	5.9	4.8
ΔT	34.9	33.1	31.1	29.1	27.8	26.9	25.0	23.1	19.7	18.2	16.8	15.8	15.3	13.7	12.1	10.6	9.0	7.4
kW	1.56	1.53	1.50	1.47	1.45	1.44	1.41	1.38	1.39	1.36	1.32	1.31	1.29	1.26	1.23	1.20	1.17	1.14
Amps	7.0	6.5	6.1	5.7	5.5	5.4	5.1	4.9	4.7	4.5	4.2	4.1	4.1	3.9	3.6	3.4	3.2	2.9
COP	4.23	4.09	3.93	3.75	3.62	3.54	3.36	3.16	2.70	2.55	2.40	2.30	2.24	2.06	1.87	1.67	1.47	1.23
EER	14.5	14.0	13.4	12.8	12.4	12.1	11.5	10.8	9.2	8.7	8.2	7.9	7.6	7.0	6.4	5.7	5.0	4.2
Hi PR	385	369	355	339	331	325	312	300	287	274	263	257	252	243	234	224	216	208
Lo PR	149	138	129	118	112	108	99	88	80	71	62	58	56	47	41	34	30	24

SSZ140241A* / CA*F3636*6A*+TXV / MBR800**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.2	28.6	26.9	25.1	24.0	23.3	21.6	19.9	17.9	16.6	15.2	14.4	13.9	12.4	11.0	9.6	8.2	6.7
ΔT	32.9	31.1	29.3	27.4	26.1	25.3	23.5	21.7	19.5	18.0	16.6	15.7	15.1	13.5	12.0	10.5	8.9	7.3
kW	2.08	2.04	2.00	1.96	1.94	1.92	1.89	1.85	1.87	1.82	1.78	1.76	1.74	1.70	1.66	1.62	1.58	1.54
Amps	8.1	7.9	7.7	7.5	7.4	7.3	7.2	7.1	7.0	6.9	6.8	6.7	6.7	6.6	6.5	6.3	6.2	6.1
COP	4.24	4.09	3.93	3.74	3.62	3.54	3.35	3.16	2.81	2.65	2.50	2.39	2.33	2.14	1.94	1.73	1.52	1.28
EER	14.5	14.0	13.4	12.8	12.4	12.1	11.4	10.8	9.6	9.1	8.5	8.2	7.9	7.3	6.6	5.9	5.2	4.4
Hi PR	373	358	344	329	321	315	303	290	278	266	255	249	245	235	226	217	209	202
Lo PR	143	133	124	114	108	104	95	85	77	68	60	56	54	46	39	33	29	23

SSZ140301A* / CA*F3642*6A*+TXV / MBR1600**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	36.5	34.5	32.5	30.4	28.0	28.1	26.1	24.1	22.6	20.9	19.2	18.2	17.5	15.7	13.9	12.1	10.3	8.5
ΔT	32.1	30.4	28.6	26.8	25.6	24.8	23.0	21.2	19.9	18.4	17.0	16.0	15.4	13.8	12.3	10.7	9.1	7.5
kW	2.40	2.36	2.32	2.27	2.25	2.23	2.19	2.14	2.20	2.15	2.11	2.08	2.06	2.01	1.97	1.92	1.87	1.83
Amps	11.8	10.6	9.6	8.7	8.2	8.0	7.2	6.6	6.1	5.6	5.1	4.9	4.8	4.3	3.6	3.1	2.5	1.8
COP	4.44	4.28	4.10	3.91	3.78	3.69	3.50	3.29	3.01	2.84	2.67	2.55	2.48	2.28	2.07	1.85	1.62	1.36
EER	15.2	14.6	14.0	13.4	12.9	12.6	11.9	11.2	10.3	9.7	9.1	8.7	8.5	7.8	7.1	6.3	5.5	4.6
Hi PR	360	346	332	318	310	304	292	281	269	257	247	241	236	227	219	210	202	195
Lo PR	137	127	119	110	104	100	92	82	74	66	58	54	52	44	38	32	28	22

SSZ140361B*/AR*F374316B*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	41.5	39.3	37.0	34.6	33.0	32.0	29.7	27.4	24.9	23.0	21.2	20.0	19.3	17.3	15.3	13.4	11.4	9.3
T/R	30.7	29.1	27.4	25.6	24.4	23.7	22.0	20.3	18.5	17.0	15.7	14.8	14.3	12.8	11.3	9.9	8.4	6.9
kW	2.96	2.90	2.85	2.79	2.76	2.74	2.69	2.64	2.93	2.86	2.80	2.76	2.74	2.68	2.61	2.55	2.49	2.43
Amps	11.9	11.1	10.4	9.8	9.5	9.3	8.9	8.4	8.1	7.8	7.5	7.3	7.2	6.9	6.5	6.1	5.7	5.2
COP	4.11	3.96	3.80	3.62	3.49	3.41	3.23	3.04	2.49	2.35	2.21	2.12	2.06	1.89	1.72	1.53	1.34	1.13
EER	14.0	13.5	13.0	12.4	11.9	11.7	11.0	10.4	8.5	8.0	7.6	7.2	7.0	6.5	5.9	5.2	4.6	3.8
HI PR	346	332	319	305	298	292	281	270	258	247	237	231	227	218	210	201	194	187
LO PR	141	131	123	113	107	102	94	84	76	68	59	55	53	45	39	33	29	22

Calculations are based on nominal CFM and 70°F indoor dry bulb.
 High pressure is measured at the suction service valve (the larger valve).
 Low pressure is measured at the gauge port connection.

Amps = Outdoor unit amps (comp.+fan)
 kW = Total system power

HEATING DATA (CONT.)

SSZ140381A* / ASPT42C14A*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	42.7	40.5	38.1	35.6	34.0	32.9	30.6	28.2	25.7	23.7	21.8	20.6	19.8	17.8	15.8	13.8	11.7	9.6
T/R	33.7	31.9	30.0	28.1	26.8	26.0	24.1	22.2	20.2	18.7	17.2	16.2	15.6	14.0	12.4	10.8	9.3	7.6
KW	2.46	2.40	2.35	2.29	2.25	2.23	2.17	2.11	2.10	2.04	1.98	1.94	1.92	1.86	1.80	1.74	1.68	1.62
AMPS	13.4	12.3	11.5	10.7	10.3	10.1	9.5	8.9	8.5	8.1	7.7	7.4	7.3	6.9	6.4	5.9	5.4	4.8
COP	4.57	4.42	4.26	4.07	3.94	3.86	3.66	3.46	3.17	3.00	2.84	2.72	2.65	2.44	2.23	2.00	1.76	1.48
HI PR	400	383	368	352	344	337	324	311	298	285	273	267	262	252	243	233	224	216
LO PR	149	138	129	119	112	108	99	88	80	71	63	58	56	47	41	35	30	24

SSZ140421A* / CA*F4860*6A*+TXV / MBR2000**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	51.5	48.8	45.9	42.9	40.0	39.7	36.9	34.0	34.3	31.6	29.1	27.5	26.5	23.8	21.1	18.4	15.7	12.8
ΔT	34.1	32.3	30.4	28.4	27.1	26.3	24.4	22.5	22.7	20.9	19.3	18.2	17.5	15.7	13.9	12.1	10.4	8.5
kW	3.40	3.33	3.27	3.21	3.17	3.14	3.08	3.02	3.07	3.00	2.94	2.90	2.87	2.81	2.74	2.68	2.61	2.54
Amps	15.2	14.1	13.2	12.4	12.0	11.8	11.1	10.6	10.1	9.7	9.2	9.0	8.9	8.5	7.9	7.5	6.9	6.3
COP	4.44	4.28	4.11	3.92	3.79	3.70	3.50	3.30	3.26	3.08	2.90	2.78	2.70	2.48	2.25	2.01	1.76	1.48
EER	15.2	14.6	14.0	13.4	12.9	12.6	12.0	11.3	11.2	10.5	9.9	9.5	9.2	8.5	7.7	6.9	6.0	5.1
Hi PR	370	354	341	326	318	312	300	288	276	263	253	247	242	233	224	215	207	200
Lo PR	142	132	123	113	107	103	95	84	76	68	60	56	53	45	39	33	29	23

SSZ140481A* / CA*F4860*6A*+TXV / MBR2000**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	57.8	54.7	51.5	48.2	47.0	44.6	41.4	38.2	36.6	33.8	31.1	29.4	28.3	25.4	22.5	19.6	16.8	13.7
ΔT	34.5	32.7	30.8	28.8	27.5	26.6	24.7	22.8	21.9	20.2	18.6	17.6	16.9	15.2	13.4	11.7	10.0	8.2
kW	3.98	3.90	3.83	3.75	3.71	3.68	3.60	3.53	3.65	3.57	3.49	3.44	3.41	3.32	3.24	3.16	3.08	3.00
Amps	19.4	17.6	16.1	14.8	14.1	13.7	12.7	11.7	11.0	10.3	9.5	9.2	9.0	8.3	7.4	6.6	5.7	4.6
COP	4.25	4.10	3.94	3.76	3.63	3.55	3.36	3.17	2.94	2.77	2.61	2.50	2.43	2.24	2.03	1.82	1.59	1.34
EER	14.5	14.0	13.5	12.8	12.4	12.1	11.5	10.8	10.0	9.5	8.9	8.5	8.3	7.6	6.9	6.2	5.4	4.6
Hi PR	408	391	376	359	351	344	331	318	304	291	279	272	267	257	247	237	229	221
Lo PR	136	126	118	109	103	99	91	81	73	65	57	53	51	43	37	32	28	22

SSZ140601A* / CA*F4860*6A*+TXV / MBE2000**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	57.8	57.8	57.8	57.8	57.0	55.2	51.3	47.3	47.9	44.2	40.7	38.4	37.0	33.2	29.4	25.7	21.9	17.9
ΔT	35.9	33.9	32.0	29.9	28.5	27.6	25.7	23.7	24.0	22.1	20.4	19.2	18.5	16.6	14.7	12.8	11.0	9.0
kW	4.83	4.74	4.64	4.54	4.48	4.44	4.35	4.25	4.42	4.32	4.21	4.15	4.11	4.00	3.90	3.80	3.69	3.59
Amps	24.7	22.3	20.4	18.8	17.9	17.4	16.0	14.8	13.9	12.9	12.0	11.5	11.3	10.4	9.2	8.2	7.1	5.7
COP	4.34	4.19	4.03	3.85	3.72	3.64	3.45	3.26	3.17	2.99	2.83	2.71	2.63	2.43	2.21	1.98	1.74	1.46
EER	14.8	14.3	13.8	13.1	12.7	12.4	11.8	11.1	10.8	10.2	9.7	9.3	9.0	8.3	7.5	6.8	5.9	5.0
Hi PR	404	387	372	356	347	341	327	314	301	288	276	269	265	255	245	235	226	218
Lo PR	136	126	119	109	103	99	91	81	73	65	57	53	51	43	37	32	28	22

Calculations are based on nominal CFM and 70°F indoor dry bulb.
 High pressure is measured at the suction service valve (the larger valve).
 Low pressure is measured at the gauge port connection.

Amps = Outdoor unit amps (comp.+fan)
 kW = Total system power

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
SSZ14 0181A*	ACNF18XX16D*+TXV		17,000	12,700	13.50	11.50	15,800	12,300	17,000	7.70	10000	580	5561903
	ARPT18B14A*		18,000	13,500	14.00	12.00	16,700	13,000	17,900	7.70	10000	580	5358285
	ARPT24B14A*		18,000	13,500	14.00	12.00	16,700	13,000	17,900	7.70	10000	560	5458806
	ARPT30B14A*		18,000	13,500	14.00	12.00	16,700	13,000	17,000	7.80	10000	585	5458807
	ARUF18B14A*+TXV		17,000	12,700	13.00	11.00	15,800	12,300	17,000	7.70	10000	605	5458802
	ARUF24B14C*+TXV		17,000	12,700	13.50	11.00	15,800	12,300	17,000	7.70	10000	600	7084849
	ARUF30B14A*		18,000	13,500	13.30	11.00	16,700	13,000	17,000	7.70	10000	585	5458805
	ARUF30B14A*+TXV		18,000	13,500	14.00	12.00	16,700	13,000	17,000	7.80	10000	585	5458804
	ASPT24B14A*		18,000	13,500	14.50	12.00	16,700	13,000	17,000	8.20	9300	605	5722665
	ASPT30C14A*		18,000	13,500	15.00	12.50	16,700	13,000	17,000	8.00	9500	580	5722668
	ASUF29B14A*		18,000	13,500	14.00	11.50	16,700	13,000	17,000	8.00	8800	605	5722667
	ASUF29B14A*+TXV		18,000	13,500	14.50	12.00	16,700	13,000	17,000	8.20	9300	605	5722666
	AVPTC24B14A*		18,000	13,500	14.50	12.00	16,700	13,000	17,000	8.20	9300	600	5924408
	AWUF31XX16A*		18,000	13,500	14.50	12.50	16,700	13,000	17,600	8.20	9000	600	3853246
	AWUF31XX16A*+TXV		18,000	13,500	15.00	12.70	16,700	13,000	17,600	8.20	9000	600	3853245
	CA*F3131*6D*+EEP+TXV		18,400	13,800	14.00	12.00	17,100	13,300	18,000	8.00	10400	600	6497960
	CA*F3131*6D*+MBR0800**-1+TXV		18,000	13,500	14.00	12.00	16,700	13,000	18,000	8.10	10200	600	4985375
	CA*F3131*6D*+MBVC1200**-1A*+TXV		18,000	13,500	15.00	12.50	16,700	13,000	17,900	8.10	10000	550	6497961
	CA*F3131*6D*+TXV	A*VC950453BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10100	650	6497962
	CA*F3131*6D*+TXV	A*VM960603BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10100	650	6497963
	CA*F3131*6D*+TXV	G*VC950453BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10100	650	6497964
	CA*F3131*6D*+TXV	G*VM960603BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10100	650	6497965
	CAPT3131*4A*	A*VC950453BXB*	18,000	13,500	15.00	12.50	16,700	13,000	17,800	8.10	10100	590	6497966
	CAPT3131*4A*	A*VM960603BXB*	18,000	13,500	15.00	12.50	16,700	13,000	17,700	8.10	10100	570	6497967
	CAPT3131*4A*	G*VC950453BXB*	18,000	13,500	15.00	12.50	16,700	13,000	17,800	8.10	10100	590	6497968
	CAPT3131*4A*	G*VM960603BXB*	18,000	13,500	15.00	12.50	16,700	13,000	17,700	8.10	10100	570	6497969
	CAPT3131*4A*+EEP		18,400	13,800	13.50	12.00	17,100	13,300	18,000	7.70	10400	580	6497970
	CAPT3131*4A*+MBR0800**-1		18,000	13,500	14.00	12.00	16,700	13,000	18,000	8.00	10800	580	5527440
	CAPT3131*4A*+MBVC1200**-1A*		18,000	13,500	15.00	12.50	16,700	13,000	17,600	8.10	10000	585	6497971
	CHPF2430B6C*+EEP+TXV		19,000	14,200	14.00	12.00	17,600	13,800	18,000	8.50	10400	600	6497972
	CHPF2430B6C*+MBR0800**-1+TXV		18,000	13,500	14.00	12.00	16,700	13,000	18,000	8.10	10200	600	3300350
	CHPF2430B6C*+MBVC1200**-1A*+TXV		18,400	13,800	14.00	12.00	17,100	13,300	18,000	8.50	10800	600	6497973
	CHPF2430B6C*+TXV	G*E80603B*B*	18,000	13,500	15.00	12.50	16,700	13,000	16,800	8.10	10200	670	5038647
	CHPF2430B6C*+TXV	A*VM960603BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10200	600	5937510
CHPF2430B6C*+TXV	G*VC950453BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10200	600	5937511	
CHPF2430B6C*+TXV	G*VM960603BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10200	600	5937512	
CHPF2430B6C*+TXV	A*VC950453BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10200	600	6497974	
CHPF2430B6C*+TXV	A*EH800603B*A*	18,000	13,500	15.00	12.50	16,700	13,000	16,800	8.10	10200	670	6844590	
CHPF3636B6C*+MBVC1200**-1A*+TXV		19,000	14,200	15.00	13.00	17,600	13,800	18,000	8.50	10400	650	6497975	
CSCF3036N6D*+TXV	G*VC950453BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10200	650	5937513	
CSCF3036N6D*+TXV	A*VC950453BXB*	18,000	13,500	15.00	12.50	16,700	13,000	18,000	8.10	10200	650	6497976	
SSZ14 0241A*	ACNF24XX16D*+TXV		23,000	17,300	13.50	11.50	21,200	17,000	24,600	7.70	14000	835	5561901
	ARPT24B14A*		24,000	18,100	13.50	11.50	22,200	17,800	24,000	8.00	14000	820	5358286
	ARPT30B14A*		24,000	18,100	14.00	12.00	22,200	17,800	23,600	8.00	14200	850	5458810
	ARUF24B14C*+TXV		23,200	17,500	13.50	11.50	21,400	17,200	23,600	7.80	14100	800	7084841
	ARUF30B14A*+TXV		24,000	18,100	14.00	12.00	22,200	17,800	23,600	8.00	14200	850	5458809
	ASPT24B14A*		22,600	17,000	14.00	11.50	21,000	16,700	22,000	8.00	13000	810	5722669
	ASPT30C14A*		23,600	17,800	15.00	12.50	21,800	17,500	22,000	8.50	13000	845	5722672
	ASUF29B14A*		22,600	17,000	13.50	11.00	21,000	16,700	22,000	8.00	13600	810	5722671
	ASUF29B14A*+TXV		22,600	17,000	14.00	11.50	21,000	16,700	22,000	8.00	13000	810	5722670
	ASUF39C14A*		23,600	17,800	14.50	12.00	21,800	17,500	22,000	8.20	12700	885	5722763
	ASUF39C14A*+TXV		23,600	17,800	15.00	12.50	21,800	17,500	22,000	8.50	12700	885	5722764
	AVPTC24B14A*		22,600	17,000	14.00	11.50	21,000	16,700	22,000	8.00	13000	800	5924409
	AVPTC30C14A*		23,600	17,800	15.00	12.50	21,800	17,500	22,000	8.50	13000	860	5924427

See Notes on Page 33.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
SSZ14 0361B*	ARPT36C14A*		33,000	25,200	13.50	11.00	30,600	25,600	33,200	8.10	20000	1235	5358290
	ARPT36D14A*		33,400	25,600	14.00	11.50	31,000	26,000	30,000	8.30	20000	1120	5358288
	ARUF48D14A*		34,000	26,000	13.00	11.50	31,400	26,400	33,000	8.20	20000	1125	5492062
	ASPT36C14A*		32,000	24,400	14.00	12.00	29,600	24,800	32,000	8.20	19300	1095	5722678
	ASPT42C14A*		33,000	25,200	14.00	12.00	30,600	25,600	33,000	8.00	19000	1125	7040834
	ASPT42D14A*		34,200	26,200	15.00	12.50	31,600	26,600	32,000	8.50	19000	1145	5722692
	ASUF39C14A*		33,600	25,600	14.00	12.00	31,200	26,200	32,000	8.20	19000	1200	5722676
	ASUF39C14A*+TXV		33,600	25,600	14.00	12.00	31,200	26,200	32,000	8.20	19000	1200	5722677
	AVPTC36C14A*		32,000	24,400	14.00	12.00	29,600	24,800	32,000	8.00	19300	1100	5924428
	AVPTC42D14A*		34,200	26,200	15.00	12.50	31,600	26,600	32,000	8.50	19000	1225	5924429
	AVPTC48C14A*		33,000	25,200	14.00	12.00	30,600	25,600	33,000	8.00	19000	1110	7040853
	AWUF37XX16B*+TXV		32,000	24,400	13.50	11.50	29,600	24,800	32,000	8.50	18000	1150	5010811
	CA*F3743*6D*	A*VC950905CXB*	34,000	26,000	14.50	12.50	31,400	26,400	32,200	8.50	18000	1270	6497992
	CA*F3743*6D*+TXV	A*VC80805C*B*	34,000	26,000	15.00	12.00	31,400	26,400	33,000	8.50	18000	1200	5953881
	CA*F4961*6D*	G*E81005C*B*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1230	5038656
	CA*F4961*6D*	G*E80805C*B*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1290	5038719
	CA*F4961*6D*	A*VC950704CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1250	5937558
	CA*F4961*6D*	A*VC950714CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1275	5937559
	CA*F4961*6D*	A*VC950905CXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.70	20000	1300	5937560
	CA*F4961*6D*	A*VC950905DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.90	20000	1300	5937561
	CA*F4961*6D*	A*VC950915DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.70	20000	1300	5937562
	CA*F4961*6D*	A*VC951155DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.80	20000	1250	5937563
	CA*F4961*6D*	A*VM960604CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1275	5937564
	CA*F4961*6D*	G*VC950704CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1250	5937565
	CA*F4961*6D*	G*VC950714CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1250	5937566
	CA*F4961*6D*	G*VC950905CXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.70	20000	1300	5937567
	CA*F4961*6D*	G*VC950905DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.90	20000	1300	5937568
	CA*F4961*6D*	G*VC950915DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.70	20000	1300	5937569
	CA*F4961*6D*	G*VC951155DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.80	20000	1250	5937570
	CA*F4961*6D*	G*VM960604CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1250	5937571
	CA*F4961*6D*	G*VM960805CXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.70	20000	1300	5937572
	CA*F4961*6D*	G*VM960805DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.70	20000	1300	5937573
	CA*F4961*6D*	G*VM961005DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.80	20000	1250	5937574
	CA*F4961*6D*	G*VM961155DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.80	20000	1250	5937575
	CA*F4961*6D*	A*EH801005C*A*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1230	6844601
	CA*F4961*6D*	A*EH800805C*A*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1290	6844659
	CA*F4961*6D*+EEP		34,800	26,600	14.00	12.00	32,200	27,000	33,400	8.50	20000	1250	4431858
	CA*F4961*6D*+EEP+TXV		35,000	26,800	14.00	12.00	32,400	27,200	33,400	8.50	20000	1250	4431859
	CA*F4961*6D*+MBR1600**-1		34,600	26,400	14.00	12.00	32,000	27,000	33,400	8.50	20000	1275	4431967
	CA*F4961*6D*+MBR1600**-1+TXV		34,600	26,400	14.00	12.00	32,000	27,000	33,400	8.50	20000	1275	4431968
CA*F4961*6D*+MBVC1600**-1A*		35,000	26,800	14.50	12.20	32,400	27,200	33,000	9.00	20000	1250	4431969	
CA*F4961*6D*+MBVC1600**-1A*+TXV		35,000	26,800	14.50	12.20	32,400	27,200	33,000	9.00	20000	1250	4431970	
CA*F4961*6D*+MBVC2000**-1A*		35,000	26,800	15.00	13.00	32,400	27,200	33,000	9.00	20000	1250	4431971	
CA*F4961*6D*+MBVC2000**-1A*+TXV		35,000	26,800	15.00	13.00	32,400	27,200	33,000	9.00	20000	1250	4431972	
CA*F4961*6D*+TXV	G*E81005C*B*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1230	5038657	
CA*F4961*6D*+TXV	G*E80805C*B*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1290	5038688	
CA*F4961*6D*+TXV	A*VC950704CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1250	5937576	
CA*F4961*6D*+TXV	A*VC950714CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1275	5937577	
CA*F4961*6D*+TXV	A*VC950905CXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.70	20000	1300	5937578	
CA*F4961*6D*+TXV	A*VC950905DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.90	20000	1300	5937579	
CA*F4961*6D*+TXV	A*VC950915DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.80	20000	1300	5937580	
CA*F4961*6D*+TXV	A*VC951155DXB*	35,000	26,800	15.00	12.50	32,400	27,200	33,400	8.80	20000	1250	5937581	
CA*F4961*6D*+TXV	A*VM960604CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1275	5937582	
CA*F4961*6D*+TXV	G*VC950704CXB*	34,600	26,400	14.50	12.20	32,000	27,000	33,400	8.50	20000	1250	5937583	

See Notes on Page 33.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
SSZ14 0381A* (cont.)	CA*F3743*6D*+TXV	A*VC950905CXB*	33,000	25,400	15.00	12.50	30,600	25,000	32,000	9.00	21000	1120	7063938
	CA*F3743*6D*+TXV	A*VC950905DXB*	34,600	26,600	15.00	12.50	32,000	26,200	34,400	9.00	21000	1100	7063939
	CA*F3743*6D*+TXV	A*VC950915DXB*	34,600	26,600	15.00	12.50	32,000	26,200	34,400	9.00	21000	1100	7063940
	CA*F3743*6D*+TXV	ADVC80805C*B*	34,600	26,600	15.00	12.50	32,000	26,200	34,000	9.00	21000	1200	7063944
	CA*F3743*6D*+TXV	G*E80805C*B*	34,600	26,600	15.00	12.50	32,000	26,200	34,000	9.00	21000	1200	7063946
	CA*F3743*6D*+TXV	G*VC80604B*B*	34,000	26,200	15.00	12.50	31,400	25,800	34,000	8.50	21000	1220	7063948
	CA*F3743*6D*+TXV	G*VC80805C*B*	34,600	26,600	15.00	12.50	32,000	26,200	34,000	9.00	21000	1200	7063950
	CA*F3743*6D*+TXV	G*VC950905DXB*	34,600	26,600	15.00	12.50	32,000	26,200	34,400	9.00	21000	1100	7063955
	CA*F3743*6D*+TXV	G*VC950915DXB*	34,600	26,600	15.00	12.50	32,000	26,200	34,400	9.00	21000	1100	7063960
	CA*F3743*6D*+TXV	G*VC951155DXB*	34,600	26,600	15.00	12.50	32,000	26,200	34,400	9.00	21000	1100	7063963
	CA*F3743*6D*+TXV	G*VM960805DXB*	34,600	26,600	15.00	12.50	32,000	26,200	34,400	9.00	21000	1100	7063968
	CA*F3743*6D*+TXV	G*VM961005DXB*	34,600	26,600	15.00	12.50	32,000	26,200	34,400	9.00	21000	1100	7063972
	CA*F3743*6D*+TXV	G*VM961155DXB*	34,600	26,600	15.00	12.50	32,000	26,200	34,400	9.00	21000	1100	7063975
	CA*F4961*6D*+EEP+TXV		34,600	26,600	14.50	12.20	32,000	26,200	34,400	8.20	21000	1100	7063921
	CA*F4961*6D*+MBVC2000**-1A*+TXV		34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1150	7063922
	CA*F4961*6D*+TXV	A*VC950704CXB*	35,000	27,000	15.50	12.50	32,400	26,600	34,000	9.00	23000	1200	7063936
	CA*F4961*6D*+TXV	A*VC950714CXB*	35,000	27,000	15.50	12.50	32,400	26,600	34,000	9.00	23000	1200	7063937
	CA*F4961*6D*+TXV	A*VC950915DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063941
	CA*F4961*6D*+TXV	A*VM960604CXB*	35,000	27,000	15.00	12.50	32,400	26,600	34,000	9.00	23000	1200	7063943
	CA*F4961*6D*+TXV	G*VC950704CXB*	35,000	27,000	15.50	12.50	32,400	26,600	34,000	9.00	23000	1200	7063952
	CA*F4961*6D*+TXV	G*VC950714CXB*	35,000	27,000	15.50	12.50	32,400	26,600	34,000	9.00	23000	1200	7063954
	CA*F4961*6D*+TXV	G*VC950905DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063956
	CA*F4961*6D*+TXV	G*VC950915DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063961
	CA*F4961*6D*+TXV	G*VM960604CXB*	35,000	27,000	15.00	12.50	32,400	26,600	34,000	9.00	23000	1200	7063967
	CA*F4961*6D*+TXV	G*VM960805DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063969
	CAPT3743*4A*	A*EH80805C*A*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	9.00	21000	995	7063929
	CAPT3743*4A*	A*VC80603B*B*	33,400	25,800	15.00	12.00	31,000	25,400	33,200	8.50	21000	1000	7063931
	CAPT3743*4A*	A*VC80604B*B*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	8.50	21000	1000	7063933
	CAPT3743*4A*	A*VC80805C*B*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	9.00	21000	1000	7063935
	CAPT3743*4A*	A*VC950915DXB*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	9.00	21000	1000	7063942
	CAPT3743*4A*	ADVC80805C*B*	33,400	25,800	15.00	12.50	31,000	25,400	33,000	9.00	21000	990	7063945
	CAPT3743*4A*	G*E80805C*B*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	9.00	21000	995	7063947
	CAPT3743*4A*	G*VC80604B*B*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	8.50	21000	1000	7063949
	CAPT3743*4A*	G*VC80805C*B*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	9.00	21000	1000	7063951
	CAPT3743*4A*	G*VC950905DXB*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	9.00	21000	1005	7063957
	CAPT3743*4A*	G*VC950915DXB*	33,400	25,800	15.00	12.50	31,000	25,400	33,200	9.00	21000	1000	7063962
	CAPT3743*4A*	G*VC951155DXB*	33,400	25,800	15.00	12.50	31,000	25,400	33,600	9.00	21000	1020	7063964
	CAPT3743*4A*	G*VM960805DXB*	33,400	25,800	15.00	12.50	31,000	25,400	33,600	9.00	21000	1000	7063970
	CAPT3743*4A*	G*VM961005DXB*	33,400	25,800	15.00	12.50	31,000	25,400	33,600	9.00	21000	1020	7063973
	CAPT3743*4A*	G*VM961155DXB*	33,400	25,800	15.00	12.50	31,000	25,400	33,600	9.00	21000	1020	7063976
	CAPT3743*4A*+EEP		32,400	25,000	14.00	11.50	30,000	24,600	32,000	8.00	20000	1000	7063923
	CAPT3743*4A*+MBVC1600**-1A*		32,400	25,000	15.00	12.50	30,000	24,600	32,000	8.50	20000	1000	7063924
	CHPF3743D6B*+MBVC2000**-1A*+TXV		34,600	26,600	15.00	12.50	32,000	26,200	34,400	8.50	21000	1200	7063925
	CHPF4860D6D*+EEP+TXV		34,600	26,600	14.50	12.20	32,000	26,200	34,400	8.20	21000	1100	7063926
	CHPF4860D6D*+MBVC2000**-1A*+TXV		34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1150	7063927
	CHPF4860D6D*+TXV	G*VC950905DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063958
	CHPF4860D6D*+TXV	G*VC951155DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063965
	CHPF4860D6D*+TXV	G*VM960805DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063971
	CHPF4860D6D*+TXV	G*VM961005DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063974
	CHPF4860D6D*+TXV	G*VM961155DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1100	7063977
CSCF4860N6D*+TXV	G*VC950704CXB*	35,000	27,000	15.50	12.50	32,400	26,600	34,600	9.00	21000	1225	7063953	
CSCF4860N6D*+TXV	G*VC950905DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1150	7063959	
CSCF4860N6D*+TXV	G*VC951155DXB*	34,600	26,600	16.00	13.00	32,000	26,200	34,400	9.00	21000	1150	7063966	
DV48PTCC14A*		33,600	25,800	15.00	12.50	31,200	25,600	34,000	9.00	20600	1150	7063919	

See Notes on Page 33.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW			
SSZ14 0421A*	ARPT42D14A*		40,000	29,400	14.00	11.50	37,200	30,400	40,000	8.50	24200	1330	5358291	
	ARPT48D14A*		40,500	29,800	14.00	12.00	37,600	30,800	40,000	8.50	24200	1280	5458813	
	ARUF48D14A*		40,000	29,400	13.00	11.00	37,200	30,400	40,000	8.00	24200	1350	5497285	
	ARUF48D14A*+TXV		40,000	29,400	14.00	11.50	37,200	30,400	40,000	8.20	24200	1280	5492063	
	ASPT48C14A*		39,000	28,600	14.00	12.00	36,200	29,600	40,000	9.00	23000	1400	7079304	
	ASPT48D14A*		41,500	30,600	15.00	12.50	38,500	31,600	40,000	9.00	23000	1410	5796520	
	ASPT60D14A*		41,500	30,600	15.00	12.50	38,500	31,600	40,000	9.00	23000	1410	5722679	
	ASUF49C14A*		38,000	28,000	13.50	11.00	35,200	29,000	39,500	8.00	24000	1350	5620395	
	AVPTC48C14A*		39,000	28,600	14.00	12.00	36,200	29,600	40,000	9.00	23000	1400	7079305	
	AVPTC48D14A*		41,500	30,600	15.00	12.50	38,500	31,600	40,000	9.00	23000	1400	5924411	
	AVPTC60D14A*		41,500	30,600	15.00	12.50	38,500	31,600	40,000	9.00	23000	1420	5924412	
	CA*F4860*6D*+TXV	A*VC950704CXB*		40,000	29,400	14.50	12.20	37,200	30,400	41,000	8.75	25000	1200	5937616
	CA*F4860*6D*+TXV	A*VC950714CXB*		40,000	29,400	14.50	12.20	37,200	30,400	41,000	8.75	25000	1200	5937617
	CA*F4860*6D*+TXV	G*VC950704CXB*		40,000	29,400	14.50	12.20	37,200	30,400	41,000	8.75	25000	1200	5937618
	CA*F4860*6D*+TXV	G*VC950714CXB*		40,000	29,400	14.50	12.20	37,200	30,400	41,000	8.75	25000	1200	5937619
	CA*F4961*6D*	A*VC81005C*B*		40,000	29,400	14.50	12.50	37,200	30,400	40,500	8.50	25000	1370	5514821
	CA*F4961*6D*	G*VC81005C*B*		40,000	29,400	14.50	12.50	37,200	30,400	40,500	8.50	25000	1370	5514822
	CA*F4961*6D*	A*VC950905DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937620
	CA*F4961*6D*	A*VC950915DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937621
	CA*F4961*6D*	A*VC951155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937622
	CA*F4961*6D*	A*VM961005DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937623
	CA*F4961*6D*	A*VM961155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937624
	CA*F4961*6D*	G*VC950905DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937625
	CA*F4961*6D*	G*VC950915DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937626
	CA*F4961*6D*	G*VC951155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937627
	CA*F4961*6D*	G*VM961005DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937628
	CA*F4961*6D*	G*VM961155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937629
	CA*F4961*6D*+EEP			41,000	30,200	14.00	12.00	38,000	31,200	41,000	9.00	27400	1250	4431860
	CA*F4961*6D*+EEP+TXV			41,000	30,200	14.00	12.00	38,000	31,200	41,000	9.00	27400	1250	4431861
	CA*F4961*6D*+MBR2000**-1			40,000	29,400	14.00	12.00	37,200	30,400	41,000	9.00	25000	1350	4431988
	CA*F4961*6D*+MBR2000**-1+TXV			40,000	29,400	14.00	12.00	37,200	30,400	41,000	9.00	25000	1350	4431989
	CA*F4961*6D*+MBVC2000**-1A*			40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1350	4431990
	CA*F4961*6D*+MBVC2000**-1A*+TXV			40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1350	4431991
	CA*F4961*6D*+TXV	A*VC81005C*B*		40,000	29,400	15.00	12.50	37,200	30,400	40,500	8.50	25000	1370	5514823
	CA*F4961*6D*+TXV	G*VC81005C*B*		40,000	29,400	15.00	12.50	37,200	30,400	40,500	8.50	25000	1370	5514824
	CA*F4961*6D*+TXV	A*VC950905CXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1325	5937630
	CA*F4961*6D*+TXV	A*VC950905DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937631
	CA*F4961*6D*+TXV	A*VC950915DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937632
	CA*F4961*6D*+TXV	A*VC951155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937633
	CA*F4961*6D*+TXV	A*VM961005DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937634
	CA*F4961*6D*+TXV	A*VM961155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937635
	CA*F4961*6D*+TXV	G*VC950905CXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1325	5937636
	CA*F4961*6D*+TXV	G*VC950905DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937637
	CA*F4961*6D*+TXV	G*VC950915DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937638
	CA*F4961*6D*+TXV	G*VC951155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937639
	CA*F4961*6D*+TXV	G*VM961005DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937640
	CA*F4961*6D*+TXV	G*VM961155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937641
CA*F4961*6D*+TXV	A*VC80805C*B*		39,000	28,600	14.50	11.80	36,200	29,600	40,500	9.00	25000	1190	6497993	
CA*F4961*6D*+TXV	ADV80805C*B*		38,500	28,200	14.50	11.50	35,800	29,200	40,500	9.00	25000	1190	6497994	
CA*F4961*6D*+TXV	G*VC80805C*B*		39,000	28,600	14.50	11.80	36,200	29,600	40,500	9.00	25000	1190	6497995	
CAPT4961*4A*	A*VC950915DXB*		40,000	29,400	15.00	12.50	37,200	30,400	40,500	9.00	25000	1295	5937642	
CAPT4961*4A*	A*VC951155DXB*		40,000	29,400	15.00	13.00	37,200	30,400	40,500	9.00	25000	1405	5937643	
CAPT4961*4A*	A*VM961005DXB*		40,000	29,400	15.00	12.50	37,200	30,400	40,500	9.00	25000	1405	5937644	
CAPT4961*4A*	A*VM961155DXB*		40,000	29,400	15.00	12.50	37,200	30,400	40,500	9.00	25000	1405	5937645	

See Notes on Page 33.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW			
SSZ14 0421A* (cont.)	CAPT4961*4A*	G*VC950905DXB*	40,000	29,400	15.00	12.50	37,200	30,400	40,500	9.00	25000	1315	5937646	
	CAPT4961*4A*	G*VC950915DXB*	40,000	29,400	15.00	12.50	37,200	30,400	40,500	9.00	25000	1295	5937647	
	CAPT4961*4A*	G*VC951155DXB*	40,000	29,400	15.00	13.00	37,200	30,400	40,500	9.00	25000	1405	5937648	
	CAPT4961*4A*	G*VM961005DXB*	40,000	29,400	15.00	12.50	37,200	30,400	40,500	9.00	25000	1405	5937649	
	CAPT4961*4A*	G*VM961155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	40,500	9.00	25000	1405	5937650	
	CAPT4961*4A*	A*VC80805C*B*	39,000	28,600	14.50	11.80	36,200	29,600	40,500	9.00	25000	1390	6497996	
	CAPT4961*4A*	A*VC950905DXB*	40,000	29,400	15.00	12.50	37,200	30,400	40,500	9.00	25000	1315	6497997	
	CAPT4961*4A*	ADV80805C*B*	38,500	28,200	14.50	11.50	35,800	29,200	40,500	9.00	25000	1375	6497998	
	CAPT4961*4A*	G*VC80805C*B*	39,000	28,600	14.50	11.80	36,200	29,600	40,500	9.00	25000	1390	6497999	
	CAPT4961*4A*+EEP			41,000	30,200	14.00	12.00	38,000	31,200	41,000	8.50	27400	1350	5520862
	CAPT4961*4A*+MBR2000**-1			40,000	29,400	14.00	12.00	37,200	30,400	41,000	9.00	25000	1380	5520892
	CAPT4961*4A*+MBVC2000**-1A*			40,000	29,400	15.00	13.00	37,200	30,400	40,000	9.00	25000	1315	5527444
	CHPF4860D6D*	A*VC950905DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937651	
	CHPF4860D6D*	A*VC951155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937652	
	CHPF4860D6D*	A*VM961005DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937653	
	CHPF4860D6D*	A*VM961155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937654	
	CHPF4860D6D*	G*VC950905DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937655	
	CHPF4860D6D*	G*VC951155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937656	
	CHPF4860D6D*	G*VM961005DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937657	
	CHPF4860D6D*	G*VM961155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937658	
	CHPF4860D6D*+EEP			41,000	30,200	14.00	12.00	38,000	31,200	41,000	9.00	27400	1250	3300384
	CHPF4860D6D*+EEP+TXV			40,000	29,400	14.00	12.00	37,200	30,400	41,000	9.00	27400	1300	3300385
	CHPF4860D6D*+MBR2000**-1+TXV			40,000	29,400	14.00	12.00	37,200	30,400	41,000	9.00	27400	1250	6498000
	CHPF4860D6D*+MBVC2000**-1A*			40,000	29,400	15.00	12.00	37,200	30,400	41,000	9.00	25000	1350	3610039
	CHPF4860D6D*+MBVC2000**-1A*+TXV			40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1350	3610056
	CHPF4860D6D*+TXV	A*VC950905DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937659	
	CHPF4860D6D*+TXV	A*VC951155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1250	5937660	
	CHPF4860D6D*+TXV	A*VM961005DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1250	5937661	
	CHPF4860D6D*+TXV	A*VM961155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1250	5937662	
	CHPF4860D6D*+TXV	G*VC950905DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937663	
	CHPF4860D6D*+TXV	G*VC951155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937664	
	CHPF4860D6D*+TXV	G*VM961005DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937665	
	CHPF4860D6D*+TXV	G*VM961155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	41,000	9.00	25000	1200	5937666	
CSCF4860N6D*+TXV	A*VC950905DXB*	40,000	29,400	15.00	12.50	37,200	30,400	40,000	9.00	25000	1450	6498001		
CSCF4860N6D*+TXV	A*VC951155DXB*	40,000	29,400	15.00	12.50	37,200	30,400	40,000	9.00	25000	1425	6498002		
DV48PTCC14A*			39,000	28,600	14.00	12.00	36,200	29,600	40,000	9.00	23000	1400	7079307	
SSZ14 0481A*	ARPT48D14A*		45,000	33,200	14.00	11.50	41,500	33,800	45,500	8.40	27000	1460	5358292	
	ARPT60D14A*		45,000	33,200	14.00	11.50	41,500	33,800	45,500	8.40	27000	1460	5458811	
	ARUF48D14A*+TXV		44,500	32,800	13.50	11.50	41,000	33,400	45,000	8.00	27000	1480	5497286	
	ASPT48C14A*		44,000	32,400	14.00	12.00	40,500	33,000	45,000	8.50	26000	1475	7040855	
	ASPT48D14A*		46,500	34,200	15.00	12.50	43,000	34,800	45,500	9.00	26000	1400	5796521	
	ASPT60D14A*		46,500	34,200	15.00	12.50	43,000	34,800	45,500	9.00	26000	1400	5722682	
	ASUF59D14A*		46,500	34,200	14.50	12.00	43,000	34,800	45,500	8.20	26000	1600	5722680	
	ASUF59D14A*+TXV		46,500	34,200	15.00	12.50	43,000	34,800	45,500	8.50	26000	1600	5722681	
	AVPTC48C14A*		44,000	32,400	14.00	12.00	40,500	33,000	45,000	8.50	26000	1445	7040856	
	AVPTC48D14A*		46,500	34,200	15.00	12.50	43,000	34,800	45,500	9.00	26000	1480	5924413	
	CA*F4961*6D*	G*VC91155DXA*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	4579617	
	CA*F4961*6D*	A*VC950905CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937667	
	CA*F4961*6D*	A*VC950905DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937668	
	CA*F4961*6D*	A*VC950915DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937669	
	CA*F4961*6D*	A*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937670	
	CA*F4961*6D*	A*VM960805CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937671	
	CA*F4961*6D*	A*VM960805DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937672	
	CA*F4961*6D*	A*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937673	

See Notes on Page 33.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
SSZ14 0481A* (cont.)	CA*F4961*6D*	A*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937674
	CA*F4961*6D*	G*VC950905CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937675
	CA*F4961*6D*	G*VC950905DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937676
	CA*F4961*6D*	G*VC950915DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937677
	CA*F4961*6D*	G*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937678
	CA*F4961*6D*	G*VM960805CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937679
	CA*F4961*6D*	G*VM960805DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937680
	CA*F4961*6D*	G*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937681
	CA*F4961*6D*	G*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937682
	CA*F4961*6D*+EEP		46,000	33,800	14.00	12.00	42,500	34,600	47,000	8.75	30000	1550	4431862
	CA*F4961*6D*+EEP+TXV		46,000	33,800	14.00	12.00	42,500	34,600	47,000	8.75	30000	1550	4431863
	CA*F4961*6D*+MBR2000**-1		46,000	33,800	14.00	12.00	42,500	34,600	47,000	8.50	30000	1550	4431998
	CA*F4961*6D*+MBR2000**-1+TXV		46,000	33,800	14.00	12.00	42,500	34,600	47,000	8.50	30000	1550	4514556
	CA*F4961*6D*+MBVC2000**-1A*		46,000	33,800	15.00	12.50	42,500	34,600	46,000	9.00	30000	1550	4431999
	CA*F4961*6D*+MBVC2000**-1A*+TXV		46,000	33,800	15.00	12.50	42,500	34,600	46,000	9.00	30000	1550	4432000
	CA*F4961*6D*+TXV	G*VC91155DXA*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	4579619
	CA*F4961*6D*+TXV	A*VC950905CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937683
	CA*F4961*6D*+TXV	A*VC950905DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937684
	CA*F4961*6D*+TXV	A*VC950915DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937685
	CA*F4961*6D*+TXV	A*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937686
	CA*F4961*6D*+TXV	A*VM960805CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937687
	CA*F4961*6D*+TXV	A*VM960805DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937688
	CA*F4961*6D*+TXV	A*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937689
	CA*F4961*6D*+TXV	A*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937690
	CA*F4961*6D*+TXV	G*VC950905CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937691
	CA*F4961*6D*+TXV	G*VC950905DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937692
	CA*F4961*6D*+TXV	G*VC950915DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937693
	CA*F4961*6D*+TXV	G*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937694
	CA*F4961*6D*+TXV	G*VM960805CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937695
	CA*F4961*6D*+TXV	G*VM960805DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937696
	CA*F4961*6D*+TXV	G*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937697
	CA*F4961*6D*+TXV	G*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937698
	CA*F4961*6D*+TXV	A*VC80805C*B*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1510	6498003
	CA*F4961*6D*+TXV	A*VC81005C*B*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1520	6498004
	CA*F4961*6D*+TXV	ADV80805C*B*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	6498005
	CA*F4961*6D*+TXV	ADV81005C*B*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1550	6498006
	CA*F4961*6D*+TXV	G*VC80805C*B*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1510	6498007
	CA*F4961*6D*+TXV	G*VC81005C*B*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1520	6498008
	CAPT4961*4A*	G*VC91155DXA*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1395	5520841
	CAPT4961*4A*	A*VC950905CXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1460	5937699
	CAPT4961*4A*	A*VC950905DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1460	5937700
	CAPT4961*4A*	A*VC950915DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1425	5937701
	CAPT4961*4A*	A*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1395	5937702
	CAPT4961*4A*	A*VM960805CXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1465	5937703
	CAPT4961*4A*	A*VM960805DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1425	5937704
CAPT4961*4A*	A*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1395	5937705	
CAPT4961*4A*	A*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1395	5937706	
CAPT4961*4A*	G*VC950905CXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1460	5937707	
CAPT4961*4A*	G*VC950905DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1460	5937708	
CAPT4961*4A*	G*VC950915DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1425	5937709	
CAPT4961*4A*	G*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1395	5937710	
CAPT4961*4A*	G*VM960805CXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1465	5937711	
CAPT4961*4A*	G*VM960805DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1425	5937712	
CAPT4961*4A*	G*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1395	5937713	

See Notes on Page 33.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
SSZ14 0481A* (cont.)	CAPT4961*4A*	G*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	46,000	8.50	30000	1395	5937714
	CAPT4961*4A*	A*VC80805C*B*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1495	6498009
	CAPT4961*4A*	A*VC81005C*B*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1530	6498010
	CAPT4961*4A*	ADVC80805C*B*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1500	6498011
	CAPT4961*4A*	ADVC81005C*B*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1545	6498012
	CAPT4961*4A*	G*VC80805C*B*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1495	6498013
	CAPT4961*4A*	G*VC81005C*B*	46,000	33,800	14.50	12.00	42,500	34,600	46,500	8.50	30000	1530	6498014
	CAPT4961*4A*+EEP		46,000	33,800	14.00	12.00	42,500	34,600	47,000	8.75	30000	1460	5520863
	CAPT4961*4A*+MBR2000**-1		46,000	33,800	14.00	12.00	42,500	34,600	47,000	8.50	30000	1560	5520894
	CAPT4961*4A*+MBVC2000**-1A*		46,000	33,800	15.00	13.00	42,500	34,600	46,000	9.00	30000	1450	5527445
	CHPF4860D6D*	G*VC91155DXA*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	4579620
	CHPF4860D6D*	A*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937715
	CHPF4860D6D*	A*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937716
	CHPF4860D6D*	A*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937717
	CHPF4860D6D*	G*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937718
	CHPF4860D6D*	G*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937719
	CHPF4860D6D*	G*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937720
	CHPF4860D6D*+EEP		47,000	34,600	14.00	12.00	43,500	35,200	46,000	9.00	30000	1550	3300391
	CHPF4860D6D*+EEP+TXV		47,000	34,600	14.00	12.00	43,500	35,200	46,000	9.00	30000	1550	3300392
	CHPF4860D6D*+MBR2000**-1		46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1550	3300393
	CHPF4860D6D*+MBR2000**-1+TXV		46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1550	3300394
	CHPF4860D6D*+MBR2000**-1A*		46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1550	3300395
	CHPF4860D6D*+MBVC2000**-1A*+TXV		46,000	33,800	15.00	12.50	42,500	34,600	46,000	8.50	30000	1550	3930741
	CHPF4860D6D*+TXV	G*VC91155DXA*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	4579621
	CHPF4860D6D*+TXV	A*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937721
	CHPF4860D6D*+TXV	A*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937722
	CHPF4860D6D*+TXV	A*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937723
	CHPF4860D6D*+TXV	G*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937724
	CHPF4860D6D*+TXV	G*VM961005DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937725
	CHPF4860D6D*+TXV	G*VM961155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1500	5937726
	CSCF4860N6D*+TXV	G*VC950905CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1575	5937727
	CSCF4860N6D*+TXV	G*VC950905DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1575	5937728
	CSCF4860N6D*+TXV	G*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1550	5937729
	CSCF4860N6D*+TXV	A*VC950905CXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1575	6498015
CSCF4860N6D*+TXV	A*VC950905DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1575	6498016	
CSCF4860N6D*+TXV	A*VC951155DXB*	46,000	33,800	14.50	12.00	42,500	34,600	47,000	8.50	30000	1550	6498017	
DV48PTCC14A*		44,000	32,400	14.00	12.00	40,500	33,000	45,000	8.50	26000	1445	7040857	
SSZ14 0601A*	ARPT60D14A*		55,500	39,500	13.00	11.50	51,500	40,500	57,500	8.50	36600	1780	5358289
	ASPT60D14A*		57,000	40,500	14.00	12.00	53,000	41,500	57,000	8.20	34800	1745	5722684
	ASUF59D14A*		57,000	40,500	14.00	12.00	53,000	41,500	60,500	8.20	36000	1580	5600187
	ASUF59D14A*+TXV		57,000	40,500	14.00	12.00	53,000	41,500	60,500	8.20	36200	1600	5722683
	AVPTC60D14A*		57,000	40,500	14.00	12.00	53,000	41,500	57,000	8.20	34800	1630	5924414
	CA*F4961*6D*	A*VC950905CXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937730
	CA*F4961*6D*	A*VC950905DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937731
	CA*F4961*6D*	A*VC950915DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937732
	CA*F4961*6D*	A*VC951155DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937733
	CA*F4961*6D*	A*VM960805CXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937734
	CA*F4961*6D*	A*VM960805DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937735
	CA*F4961*6D*	A*VM961005DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937736
	CA*F4961*6D*	A*VM961155DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937737
	CA*F4961*6D*	G*VC950905CXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937738
	CA*F4961*6D*	G*VC950905DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937739
	CA*F4961*6D*	G*VC950915DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937740
	CA*F4961*6D*	G*VC951155DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937741

See Notes on Page 33.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
SSZ14 0601A* (cont.)	CA*F4961*6D*	G*VM960805CXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937742
	CA*F4961*6D*	G*VM960805DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937743
	CA*F4961*6D*	G*VM961005DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937744
	CA*F4961*6D*	G*VM961155DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937745
	CA*F4961*6D*+EEP		57,000	40,500	14.00	12.00	53,000	41,500	58,000	8.75	39500	1800	4431864
	CA*F4961*6D*+EEP+TXV		57,000	40,500	14.00	12.00	53,000	41,500	58,000	8.75	39000	1800	4431865
	CA*F4961*6D*+MBR2000**-1		56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	4432009
	CA*F4961*6D*+MBR2000**-1+TXV		56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	4514557
	CA*F4961*6D*+MBVC2000**-1A*		56,500	40,000	15.00	12.50	52,500	41,500	57,000	9.00	33000	1800	4432010
	CA*F4961*6D*+MBVC2000**-1A*+TXV		56,500	40,000	15.00	12.50	52,500	41,500	57,000	9.00	33000	1800	4432011
	CA*F4961*6D*+TXV	A*VC950905CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937746
	CA*F4961*6D*+TXV	A*VC950905DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937747
	CA*F4961*6D*+TXV	A*VC950915DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937748
	CA*F4961*6D*+TXV	A*VC951155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1800	5937749
	CA*F4961*6D*+TXV	A*VM960805CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937750
	CA*F4961*6D*+TXV	A*VM960805DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937751
	CA*F4961*6D*+TXV	A*VM961005DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937752
	CA*F4961*6D*+TXV	A*VM961155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937753
	CA*F4961*6D*+TXV	G*VC950905CXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937754
	CA*F4961*6D*+TXV	G*VC950905DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937755
	CA*F4961*6D*+TXV	G*VC950915DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937756
	CA*F4961*6D*+TXV	G*VC951155DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937757
	CA*F4961*6D*+TXV	G*VM960805CXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937758
	CA*F4961*6D*+TXV	G*VM960805DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1750	5937759
	CA*F4961*6D*+TXV	G*VM961005DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937760
	CA*F4961*6D*+TXV	G*VM961155DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1800	5937761
	CAPT4961*4A*	A*VC950905CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1785	5937762
	CAPT4961*4A*	A*VC950905DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1695	5937763
	CAPT4961*4A*	A*VC950915DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1680	5937764
	CAPT4961*4A*	A*VC951155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1780	5937765
	CAPT4961*4A*	A*VM960805CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1800	5937766
	CAPT4961*4A*	A*VM960805DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1660	5937767
	CAPT4961*4A*	A*VM961005DXB*	56,500	40,000	13.50	11.50	52,500	41,500	57,000	8.50	33000	1780	5937768
	CAPT4961*4A*	A*VM961155DXB*	56,500	40,000	13.50	11.50	52,500	41,500	57,000	8.50	33000	1780	5937769
	CAPT4961*4A*	G*VC950905CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1785	5937770
	CAPT4961*4A*	G*VC950905DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1695	5937771
	CAPT4961*4A*	G*VC950915DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1680	5937772
	CAPT4961*4A*	G*VC951155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1780	5937773
	CAPT4961*4A*	G*VM960805CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1800	5937774
	CAPT4961*4A*	G*VM960805DXB*	56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1660	5937775
	CAPT4961*4A*	G*VM961005DXB*	56,500	40,000	13.50	11.50	52,500	41,500	57,000	8.50	33000	1780	5937776
	CAPT4961*4A*	G*VM961155DXB*	56,500	40,000	13.50	11.50	52,500	41,500	57,000	8.50	33000	1780	5937777
	CAPT4961*4A*+EEP		57,000	40,500	14.00	12.00	53,000	41,500	58,000	8.50	39000	1700	5520864
	CAPT4961*4A*+MBR2000**-1		56,500	40,000	14.00	12.00	52,500	41,500	57,000	8.50	33000	1650	5520896
	CAPT4961*4A*+MBVC2000**-1A*		56,500	40,000	14.50	12.50	52,500	41,500	57,000	9.00	33000	1790	5527446
	CHPF4860D6D*	A*VC950905CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937778
	CHPF4860D6D*	A*VC950905DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937779
CHPF4860D6D*	A*VC951155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937780	
CHPF4860D6D*	A*VM960805CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937781	
CHPF4860D6D*	A*VM960805DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937782	
CHPF4860D6D*	A*VM961005DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937783	

See Notes on Page 33.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
SSZ14 0601A* (cont.)	CHPF4860D6D*	A*VM961155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937784
	CHPF4860D6D*	G*VC950905CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937785
	CHPF4860D6D*	G*VC950905DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937786
	CHPF4860D6D*	G*VC951155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937787
	CHPF4860D6D*	G*VM960805CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937788
	CHPF4860D6D*	G*VM960805DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937789
	CHPF4860D6D*	G*VM961005DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937790
	CHPF4860D6D*	G*VM961155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937791
	CHPF4860D6D*+EEP		57,000	40,500	14.00	12.00	53,000	41,500	58,000	8.75	39500	1800	3300399
	CHPF4860D6D*+EEP+TXV		57,000	40,500	14.00	12.00	53,000	41,500	58,000	8.75	39500	1800	3300400
	CHPF4860D6D*+MBR2000**-1		57,000	40,500	14.00	12.00	53,000	41,500	57,000	8.75	38000	1850	3300403
	CHPF4860D6D*+MBR2000**-1+TXV		57,000	40,500	14.00	12.00	53,000	41,500	57,000	8.75	38000	1850	3300404
	CHPF4860D6D*+MBR2000**-1A*		57,000	40,500	14.00	12.00	53,000	41,500	57,000	8.75	38000	1850	3300405
	CHPF4860D6D*+MBVC2000**-1A*		56,500	40,000	15.00	12.50	52,500	41,500	57,000	9.00	33000	1800	3610041
	CHPF4860D6D*+MBVC2000**-1A*+TXV		56,500	40,000	15.00	12.50	52,500	41,500	57,000	9.00	33000	1800	3610057
	CHPF4860D6D*+TXV	A*VC950905CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937792
	CHPF4860D6D*+TXV	A*VC950905DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937793
	CHPF4860D6D*+TXV	A*VC951155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937794
	CHPF4860D6D*+TXV	A*VM960805CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937795
	CHPF4860D6D*+TXV	A*VM960805DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937796
	CHPF4860D6D*+TXV	A*VM961005DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937797
	CHPF4860D6D*+TXV	A*VM961155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937798
	CHPF4860D6D*+TXV	G*VC950905CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937799
	CHPF4860D6D*+TXV	G*VC950905DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937800
	CHPF4860D6D*+TXV	G*VC951155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937801
	CHPF4860D6D*+TXV	G*VM960805CXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937802
	CHPF4860D6D*+TXV	G*VM960805DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937803
	CHPF4860D6D*+TXV	G*VM961005DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937804
	CHPF4860D6D*+TXV	G*VM961155DXB*	56,500	40,000	14.00	11.50	52,500	41,500	57,000	8.50	33000	1750	5937805
	CSCF4860N6D*+TXV	G*VC951155DXB*	56,500	40,000	13.50	11.50	52,500	41,500	57,000	8.50	33000	1850	5937806
CSCF4860N6D*+TXV	A*VC950905CXB*	56,500	40,000	13.50	11.50	52,500	41,500	57,000	8.50	33000	1675	6498018	
CSCF4860N6D*+TXV	A*VC950905DXB*	56,500	40,000	13.50	11.50	52,500	41,500	57,000	8.50	33000	1675	6498019	
CSCF4860N6D*+TXV	A*VC951155DXB*	56,500	40,000	13.50	11.50	52,500	41,500	57,000	8.50	33000	1850	6498020	

¹ Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F


³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

NOTES


- ° Always check the S&R plate for electrical data on the unit being installed.
- ° When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- ° EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

SSZ14018/30/42-601AF, 241AJ, 361B*, 381A*

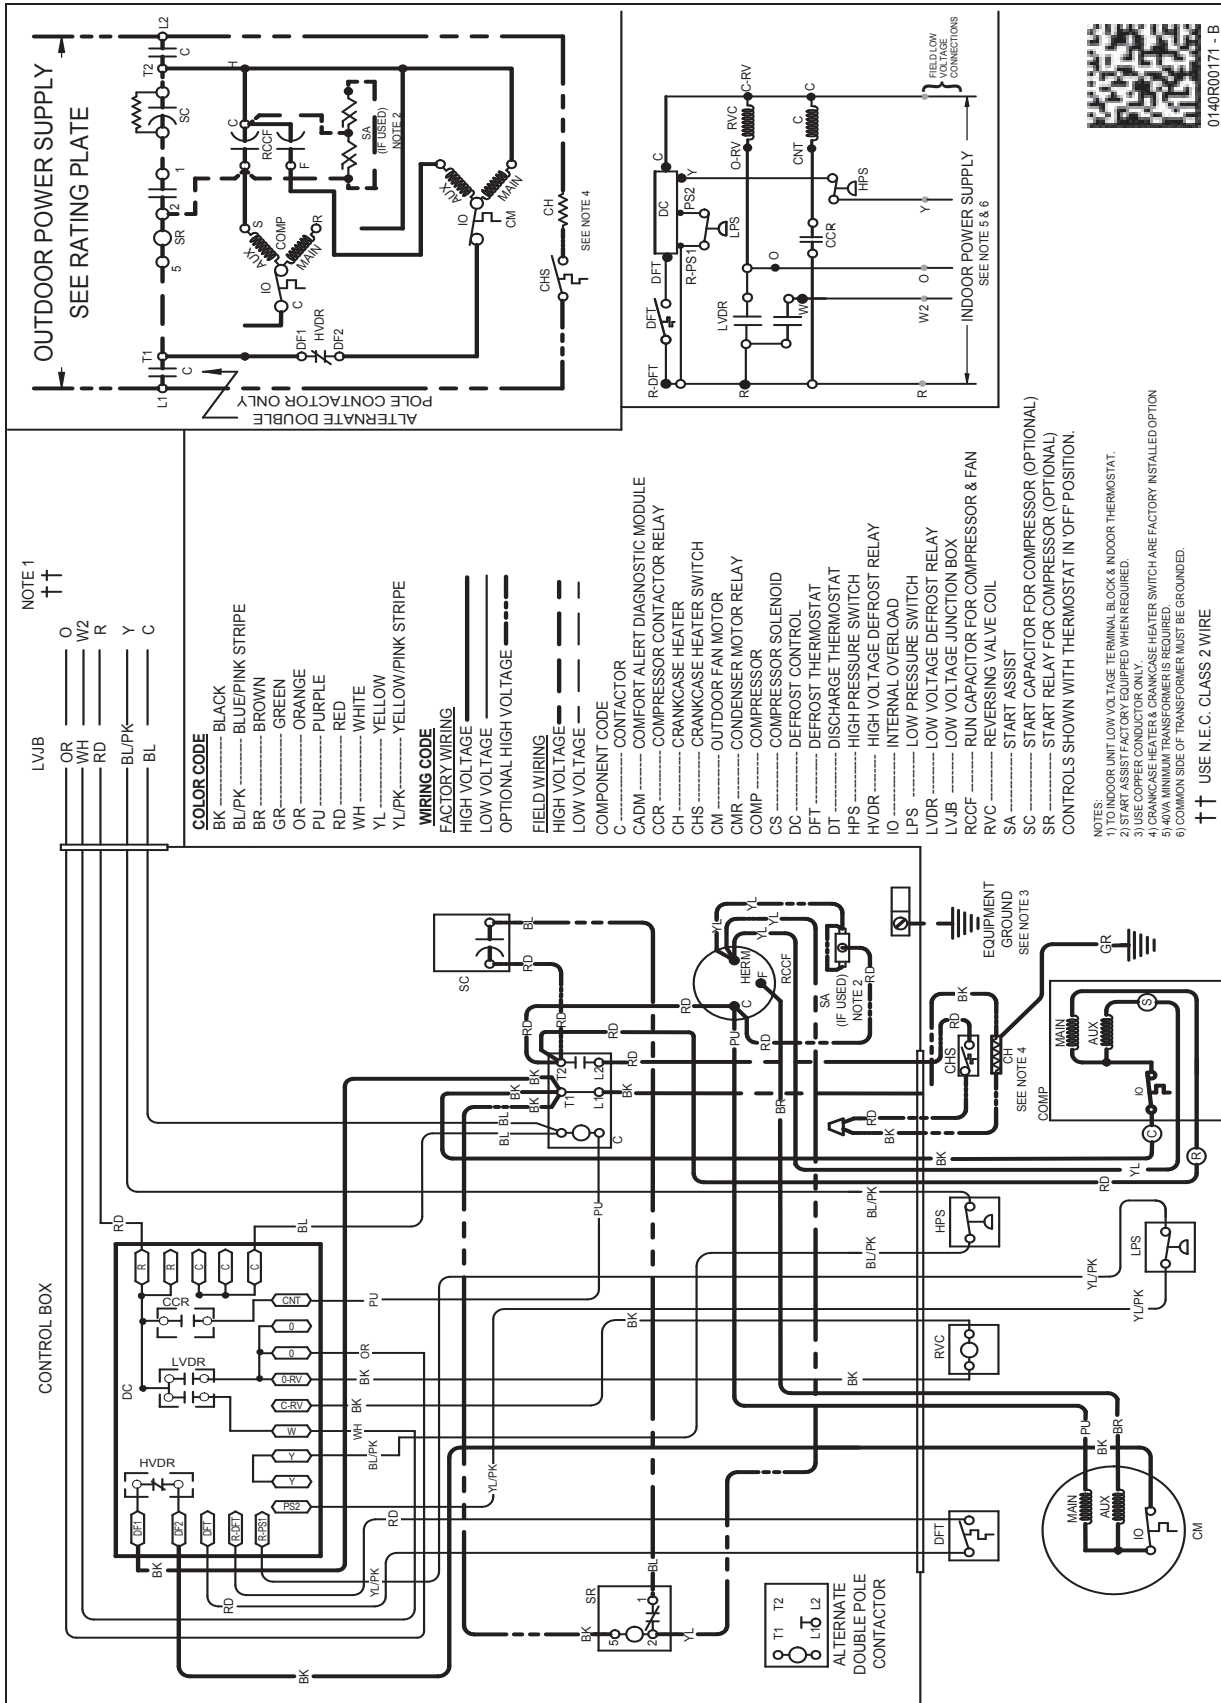

OUTDOOR POWER SUPPLY
SEE RATING PLATE

ALTERNATE DOUBLE POLE CONTACTOR ONLY

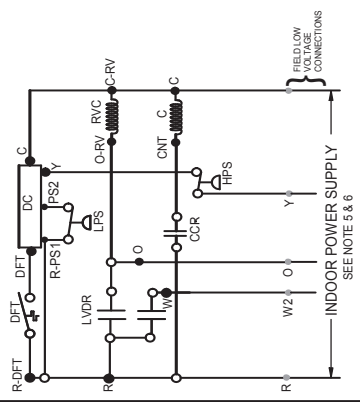


0140R00171 - B

WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

SSZ14018/30/42-601AA-AE, 241AA-AH

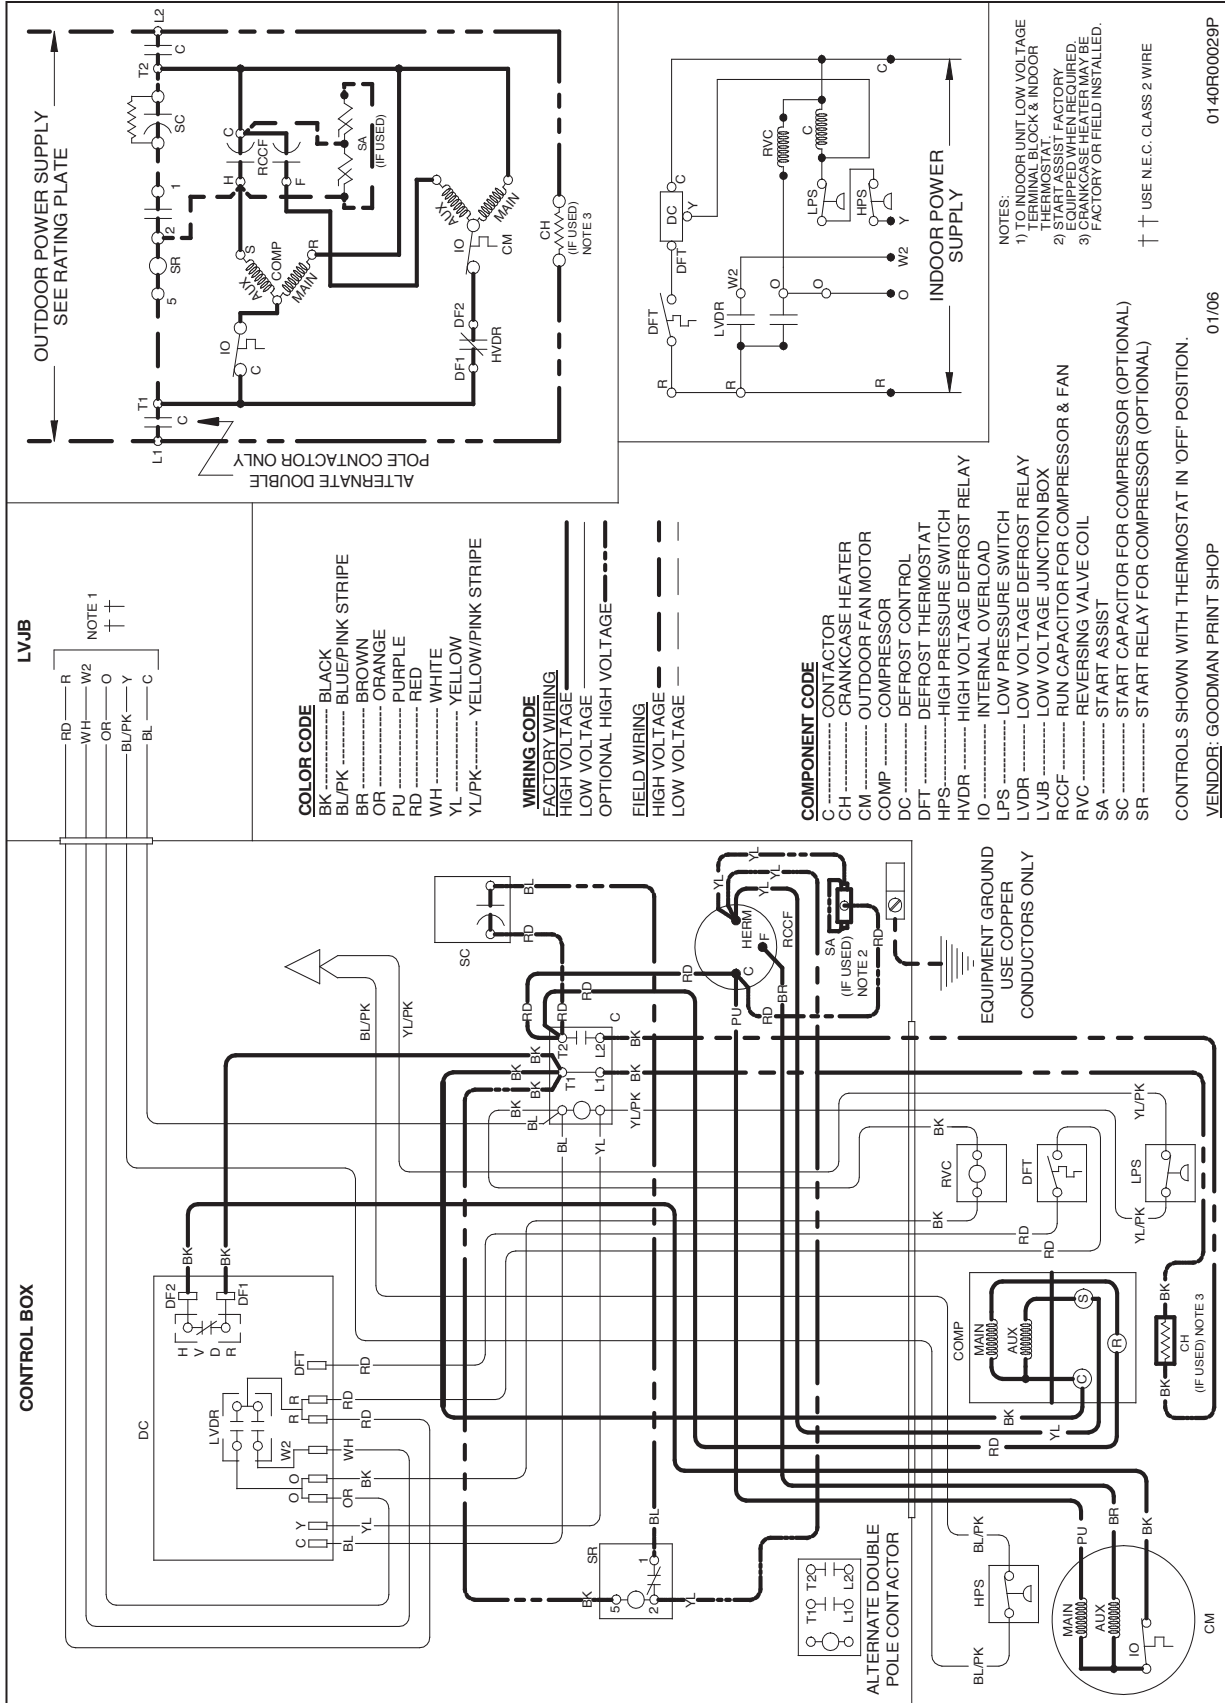


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

DIMENSIONS

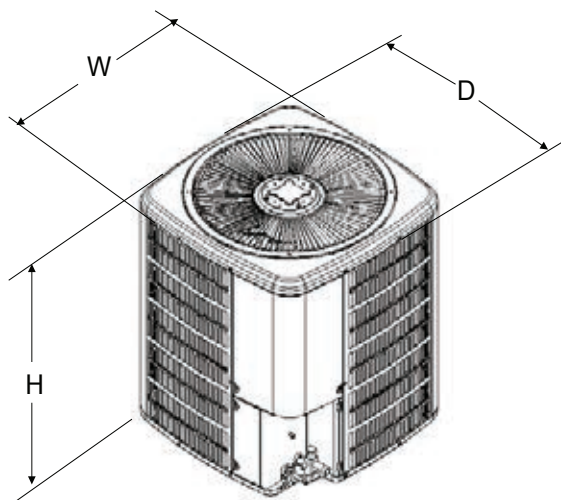

MODEL	DIMENSIONS		
	W"	D"	H"
SSZ140181**	29	29	34¼
SSZ140241**	29	29	38¼
SSZ140301**	29	29	38¼
SSZ140361**	29	29	38¼
SSZ140381**	35½	35½	38¼
SSZ140421**	35½	35½	38¼
SSZ140481**	35½	35½	34¼
SSZ140601**	35½	35½	38¼

ACCESSORIES

MODEL	DESCRIPTION	SSZ14	SSZ14	SSZ14	SSZ14	SSZ14	SSZ14	SSZ14	SSZ14
		0181**	0241**	0301**	0361**	0381**	0421**	0481**	0601**
ABK-20	Anchor Bracket Kit *	X	X	X	X	X	X	X	X
AFE18-60A	All-fuel Kit	X	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X	X
OT/EHR18-60	Emergency Heat Relay kit	X	X	X	X	X	X	X	X
OT18-60A ²	Outdoor Thermostat w/ Lockout Stat	X	X	X	X	X	X	X	X
TX2N4 ³	TXV Kit	X							
TX2N4A ³	TXV Kit	X	X						
TX3N4 ³	TXV Kit			X	X	X			
TX5N4 ³	TXV Kit						X	X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0 °F with 50% or higher relative humidity.

³ Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.