



Submittal Data: XK-60

XK-60 Command Center for Ductfree Split Systems

Job Name _____ Location _____ Date _____

Purchaser _____ Engineer _____

Submitted To _____ For Reference Approval Construction

Unit Designation _____ Schedule No. _____

GENERAL FEATURES

- Tactile Feedback Keypad
- Easy Setup and Programming
- Sleek Thin Design Blends into any Décor
- Reaches up to 26 feet.
- Convenient LCD Display Backlighting
- 18-2 AWG communication cable not included
- No Batteries Required



Compatible with the following Models:

Indoor Models	Model Numbers
Ceiling Cassette	UMATxxHP230V1AC
Slim Concealed Duct	UMATxxHP230V1AD
Universal Floor/Ceiling	UMATxxHP230V1AF

XK60 Command Center allows fast & easy access to a large number. The following is a list of typical features and functions support by the X-60 controller:

Note: Some indoor models may not support specific system features or functions.

Always refer to the indoor unit Owner's Manual for a complete list of feature and functions.

On/Off - The On/Off button allows you to start and stop the system.

Operating Mode - Allows users to select an operating mode (i.e. Cooling, Heating, Dry, and Fan Only).

Fan Speed -The indoor fan (i.e. High, Medium, Low & Auto) can be adjusted for peak comfort and quietness.

Room Setpoint – Adjust room setpoint temperature between 61 deg F to 86 deg F (16 ~ 30°C range).

Timer Mode - Program a time period (i.e. 0.5-24 hr.) to which the system will turn ON or OFF.

Sleep Mode – Automatically adjust room temperature during your sleep time (i.e. 0.5-24 hr. range).

Turbo Mode – Turbo will force system to run at higher speeds to reach the desired room temperature faster.


X-Fan Mode - Removes moisture build up on coil when the system is turned OFF to prevent mold and mildew.

Privacy Lock - Privacy Lock to prevent unauthorized access to the controls and tampering with system settings.

DIMENSIONAL SPECIFICATIONS


Units: inch (mm)

XK-60 Command Center for Ductfree Split Systems

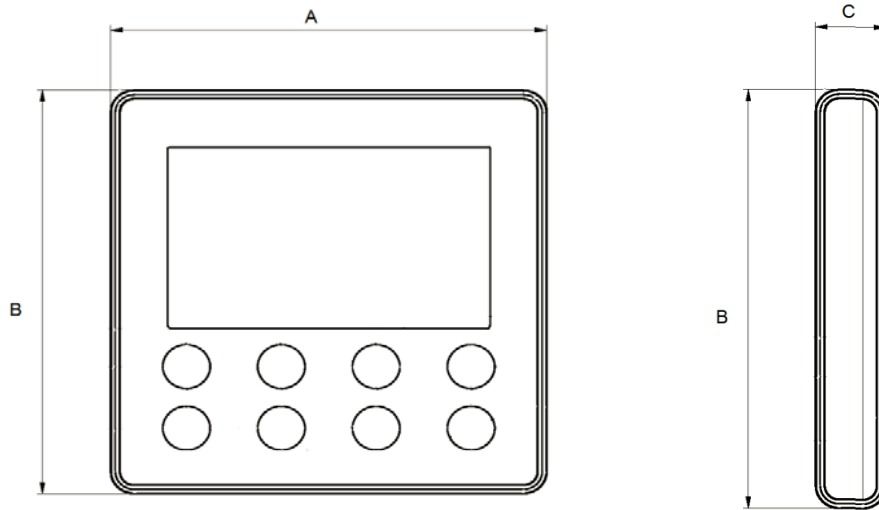

Type	Part Number		A	B	C
XK-60	30294000007		3.625 (92)	3.625 (92)	1.375 (35)

SYSTEM WIRING DIAGRAM

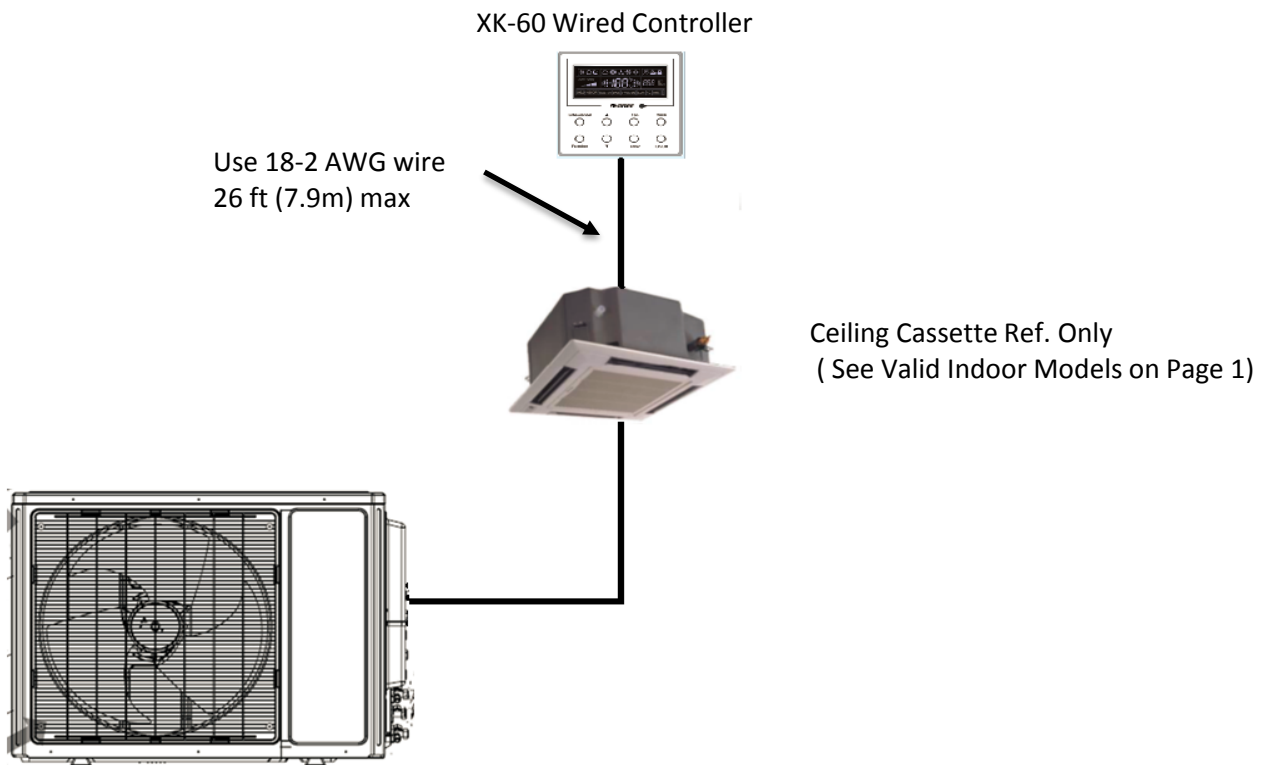

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.