

Registers

26




Description



- supply/return register with adjustable double deflection blades and volume damper
- designed for direct mounting
- rectangular register taps are not required
- register is made of galvanized sheet steel
- damper is made of electro-galvanized

Ordering Example

Product Code: Type A B
 DMR aa bb

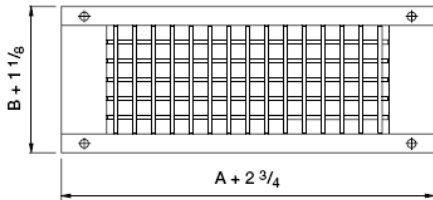

Screws for mounting are supplied with the register.



DMR

Register nom. size (in)	Min. duct diameter (in)	Free area (ft ²)	Duct opening A x B (in)	Weight (lb)
13 x3	6	0.18	12 3/4 x3	2.4
17 x3	6	0.25	16 3/4 x3	3.1
21 x3	6	0.30	20 5/8 x3	3.7
25 x3	6	0.36	24 5/8 x3	4.2
33 x3	6	0.48	32 1/2 x3	5.3
41 x3	8	0.60	40 3/8 x3	6.4
49 x3	8	0.73	48 1/4 x3	7.1
13 x6	12	0.36	12 3/4 x6	3.1
17 x6	12	0.48	16 3/4 x6	4.2
21 x6	12	0.60	20 5/8 x6	5.1
25 x6	12	0.73	24 5/8 x6	5.7
33 x6	12	1.00	32 1/2 x6	7.7
41 x6	12	1.20	40 3/8 x6	8.6
49 x6	12	1.46	48 1/4 x6	9.7
13 x9	20	0.60	12 3/4 x8 7/8	4.8
17 x9	20	0.80	16 3/4 x8 7/8	6.6
21 x9	20	1.00	20 5/8 x8 7/8	7.5
25 x9	20	1.20	24 5/8 x8 7/8	8.2
33 x9	20	1.60	32 1/2 x8 7/8	11.2
41 x9	20	2.00	40 3/8 x8 7/8	12.8
49 x9	20	2.41	48 1/4 x8 7/8	13.9