

PRO

WIFI THERMOSTAT MADE EASY & AFFORDABLE

WIFI
BUILT-IN



Exclusively for Contractors

T701i WiFi Thermostat

Millions of T701 thermostats are in homes across the nation. Not because of all of the bells and whistles it offers, but because it is Simple. Simple to install. Simple to operate. Simple to sell. The exact same logic was applied while designing the T701i. Installation is a breeze. Programming is optional. WIFI is optional. Comfort guaranteed.



Easy Setup

If you know how to install any Pro1 thermostat than you know how to install a connected model. The quickstart guide will walk the homeowner through the WIFI linking procedure.



Universal Subbase

Fast, easy upgrade from existing Pro1 thermostats. No additional wiring necessary as long as C is connected.



Private Label

Contractor contact info displayed in mobile app and on magnetic badge of thermostat to generate return business.



WiFi Optional

All thermostats are fully functional without internet access. Unknown network password? New construction? No problem. Pro1 will help the homeowner get it connected when they get home.



Smart Grid Capable

Works with many utility incentive programs. Learn more from your professional installer or Pro1 representative.



Active Alerts


Receive alerts from anywhere. High and low temp. limits, connection status, and more.

PRO

1-800-PRO1-559 (776-1559)

www.pro1iaq.com


WIFI Thermostat Application Guide

	PRO Model #	NP Non-programmable	Stages of Heat	Stages of Cool	Heat pump with emergency heat compatible	Compatible with Conventional Systems	Display Size (Square Inches)	Auto Changeover	Filter Change Reminder	Room Temperature Calibration	Adjustable Temperature Swing	Always on Display Light	Keypad Lockout	Adjustable Setpoint Limits	Memory Type (Permanent)	Touchscreen	WIFI Ready	Terminals
T701i	NP**	1	1	•	4	•	•	•	•	•	•	•	•	•	•	•	•	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
Gas or Oil Heat		Yes		24 Volt Heat Only Systems				Yes										
Electric Furnace		Yes		24 Volt Heat & Cool Systems				Yes										
Heat Pump (no Aux. or Emergency Heat)		Yes		Cool Only Systems				Yes										
Heat Pump (with Aux.)		No		Light Commercial Features				No										
Multi-stage Systems		No		Millivolt				No										

*Programming ** = Programming only available from the web app*

Specifications

- The display range of temperature41°F to 95°F (5°C to 35°C)
- The control range of temperature44°F to 90°F (7°C to 32°C)
- Load rating1 amp per terminal, 1.5 amp maximum all terminals combined
- Display accuracy 1°F
- Swing (cycle rate of differential)..... Heating is adjustable from 0.2°F to 2.0°F
Cooling is adjustable from 0.2°F to 2.0°F
- Power Source 18 to 30 VAC, NEC Class II, 50/60 Hz for hardwire (common wire)
- Operating ambient 32°F to + 105°F (0° to +41°C)
- Operating humidity 90% non-condensing maximum
- Dimensions of Thermostat 4.7"W x 4.6"H x 1.0"D
- WIFI Module Supporting 802.11 B/G/N Standards
- Frequency 2.4 GHz ISM radio band

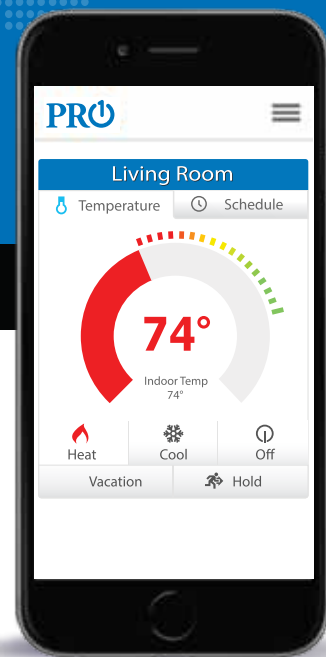

Smart Grid Capable

Utility companies offer rebates, rate reductions and other incentives to homeowners who opt into demand response programs. These programs allow the utility companies to scale back energy usage during peak time periods. To learn more contact your professional technician or local Pro1 Sales Representative.

Save from Anywhere

Control and monitor the system's performance from anywhere. Homeowners can choose to receive tips on ways to maximize energy efficiency throughout the year.

The Active Alerts send notifications to your smart device if the system is not working correctly.

T701i WIFI THERMOSTAT