




# SUBMITTAL DRAWING

## SPIRAL PIPE (MODEL NO: SPI0)

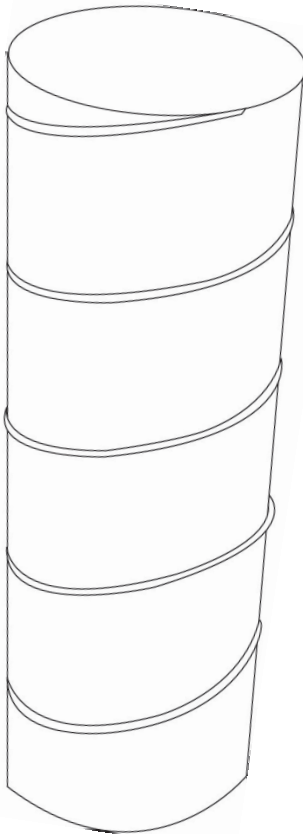

Diameter	Gauge	Positive Pressure Rating	Negative Pressure Rating
4"	26 Ga	+ 10" w.g.	-
5"	26 Ga	+ 10" w.g.	-
6"	26 Ga	+ 10" w.g.	- 10" w.g.
7"	26 Ga	+ 10" w.g.	- 10" w.g.
8"	26 Ga	+ 10" w.g.	- 10" w.g.
10"	26 Ga	+ 10" w.g.	- 10" w.g.
12"	26 Ga	+ 10" w.g.	- 4" w.g.
14"	26 Ga	+ 10" w.g.	- 4" w.g.
16"	24 Ga	+ 10" w.g.	- 4" w.g.
18"	24 Ga	+ 10" w.g.	- 4" w.g.
20"	24 Ga	+ 10" w.g.	- 2" w.g.
22"	24 Ga	+ 10" w.g.	- 2" w.g.
24"	24 Ga	+ 10" w.g.	-

### NOTES

- Material: Hot Dipped Galvanized Steel per ASTM A653 CS Type B  
Coating designation G40
- Also available by special request: Galvannealed steel (paintable) per ASTM A653  
Coating designation A40
- Spiral lock seam (SMACNA RL-1)
- Available in 10 ft lengths

JOB NAME: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 ARCHITECT: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_

DATE: 09/26/12    SW-SPPHL    SD-0032

Spiral Pipe  
 MODEL NO: SPI0