




# SUBMITTAL SHEET for Flexible Duct

## S-LP-10 Non-Insulated Flexible Air Connector for All Pressure Systems

<b>CODES/STANDARDS</b>	GreenGuard Certified for Superior Indoor Air Quality	Listed and labeled by Underwriters' Laboratories, Inc., as a Class 1 Connector, Standard 181. It complies with the latest NFPA Bulletins 90A and 90B. Flame spread: not over 25. Smoke developed: not over 50.
<b>FABRIC TYPE</b>		Coated fiberglass woven fabric.
<b>STEEL WIRE</b>		Coated spring steel wire helix.
<b>SIZES, ID</b>		2 3 4 5 6 7 8 9 10 12 14
<b>LENGTH (feet)</b>		25 ft.
<b>INSIDE BEND RADIUS (inches)</b>		2 3 4 5 6 7 8 9 10 12 14
<b>OPERATING TEMPERATURE RANGE</b>		-20° F to 250° F.
<b>RATED VELOCITY</b>		5000 fpm.
<b>MAX RATED PRESSURE</b>	<b>POSITIVE</b>	All Sizes – 10" w.g.
	<b>NEGATIVE</b>	All Sizes – 1" w.g.

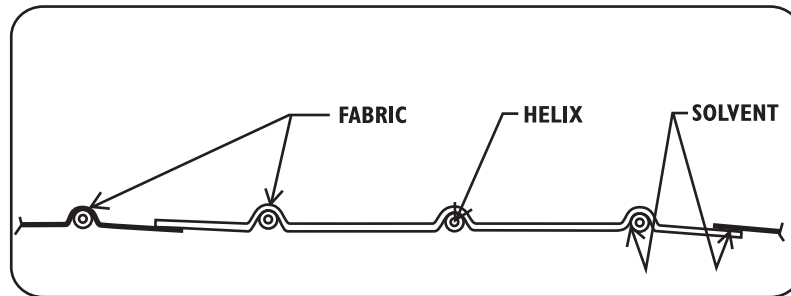

**JOB** \_\_\_\_\_  
**LOCATION** \_\_\_\_\_  
**ENGINEER** \_\_\_\_\_  
**CONTRACTOR** \_\_\_\_\_  
Certified Correct

**BY** \_\_\_\_\_  
**TITLE** \_\_\_\_\_  
**DATE** \_\_\_\_\_

**P.O. NO.** \_\_\_\_\_  
**JOB NO.** \_\_\_\_\_  
**REPRESENTATIVE** \_\_\_\_\_  
Approved for Construction

**BY** \_\_\_\_\_  
**TITLE** \_\_\_\_\_  
**DATE** \_\_\_\_\_

Thermaflex® – A Division of Flex-Tek Group, a subsidiary of Smiths Group plc.

www.thermaflex.net

National Sales Headquarters

• P.O. Box 927 (381 Carwellyn Rd.) • Abbeville, SC 29620 • 800-459-4822

Canada

• 4610 Eastgate Pkwy, Unit 3 • Mississauga, Ontario L4W 3W6 • 905-602-9660

© Copyright 2015 Flex-Tek Group, Bulletin S-LP-10 10/15 Printed in U.S. A.

