
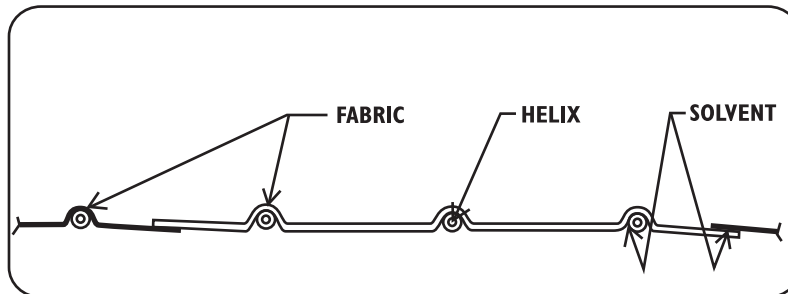




# SUBMITTAL SHEET for Flexible Duct

## S-LD Non-Insulated Flexible Air Connector for All Pressure Systems

CODES/STANDARDS	GreenGuard Certified for Superior Indoor Air Quality		Listed and labeled by Underwriters' Laboratories, Inc., as a Class I Connector, Standard 181. It complies with the latest NFPA Bulletins 90A and 90B. Flame spread: not over 25. Smoke developed: not over 50.										
	FABRIC TYPE		Foil reinforced film laminate.										
STEEL WIRE	Coated spring steel wire helix.												
SIZES, ID	2	3	4	5	6	7	8	9	10	12	14		
LENGTH (feet)	25 ft.												
INSIDE BEND RADIUS (inches)	2	3	4	5	6	7	8	9	10	12	14		
OPERATING TEMPERATURE RANGE	0° F to 250° F.												
RATED VELOCITY	5000 fpm.												
MAX RATED PRESSURE	POSITIVE		All Sizes – 10" w.g.										
	NEGATIVE		All Sizes – 1" w.g.										



JOB _____	P.O. NO. _____
LOCATION _____	JOB NO. _____
ENGINEER _____	REPRESENTATIVE _____
CONTRACTOR _____	Approved for Construction
BY _____	BY _____
TITLE _____	TITLE _____
DATE _____	DATE _____

**THERMAFLEX®** – A Division of Flex-Tek Group, a subsidiary of Smiths Group plc.  
 National Sales Headquarters  
 • 528 Carwellyn Rd. • Abbeville, SC 29620 • 800-459-4822  
 Canada  
 • 5230 Orbitor Dr. • Mississauga, Ontario L4W 5G7 • 905-602-9660  
 www.thermaflex.net

