




# SUBMITTAL SHEET for Flexible Duct

## S-LD Non-Insulated Flexible Air Connector for All Pressure Systems

<b>CODES/STANDARDS</b>	GreenGuard Certified for Superior Indoor Air Quality	Listed and labeled by Underwriters' Laboratories, Inc., as a Class I Connector, Standard 181. It complies with the latest NFPA Bulletins 90A and 90B. Flame spread: not over 25. Smoke developed: not over 50.
<b>FABRIC TYPE</b>		Foil reinforced film laminate.
<b>STEEL WIRE</b>		Coated spring steel wire helix.
<b>SIZES, ID</b>		2 3 4 5 6 7 8 9 10 12 14
<b>LENGTH (feet)</b>		25 ft.
<b>INSIDE BEND RADIUS (inches)</b>		2 3 4 5 6 7 8 9 10 12 14
<b>OPERATING TEMPERATURE RANGE</b>		-20° F to 250° F.
<b>RATED VELOCITY</b>		5000 fpm.
<b>MAX RATED PRESSURE</b>	<b>POSITIVE</b>	All Sizes – 10" w.g.
	<b>NEGATIVE</b>	All Sizes – 1" w.g.

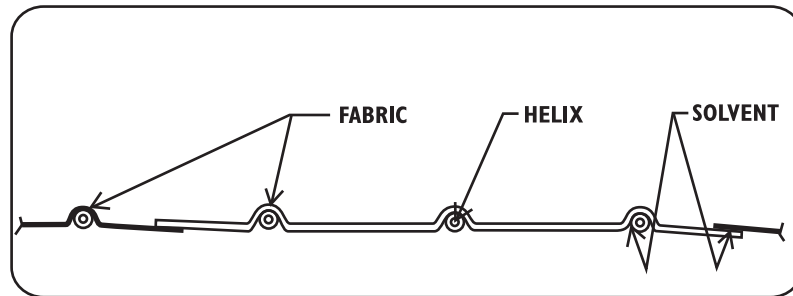

<b>JOB</b> _____	<b>P.O. NO.</b> _____
<b>LOCATION</b> _____	<b>JOB NO.</b> _____
<b>ENGINEER</b> _____	<b>REPRESENTATIVE</b> _____
<b>CONTRACTOR</b> _____	
Certified Correct	Approved for Construction
<b>BY</b> _____	<b>BY</b> _____
<b>TITLE</b> _____	<b>TITLE</b> _____
<b>DATE</b> _____	<b>DATE</b> _____

**THERMAFLEX®** – A Division of Flex-Tek Group, a subsidiary of Smiths Group plc.

[www.thermaflex.net](http://www.thermaflex.net)

**National Sales Headquarters**

• P.O. Box 927 (381 Carvellyn Rd.) • Abbeville, SC 29620 • 800-459-4822

**Canada**

• 4610 Eastgate Pkwy, Unit 3 • Mississauga, Ontario L4W 3W6 • 905-602-9660

© Copyright 2015 Flex-Tek Group, Bulletin S-LD 10/15 Printed in U.S. A.

