

### Nu-Calgon PRODUCT CATALOG

Quality Products for Air Conditioning, Refrigeration & Heating

Volume 17, Number

Subcrite Market Weith Barket Weith Barket Barket Barket Weith Barket Weith Barket Weith Barket Weith Barket	
Table of Contents• OEM approved not to clog manifold gaugesTotal System Protection1-3Coil Cleaners and Sprayers4-10Indeer Air Quality11.15	seal
Total System Protection1-3• Works with all refrigerantsCoil Cleaners and Sprayers4-10• Proven not to plug TEVs, cap tubes or pistorIndeer Air Quality11.15• No need to pump down the system	3
Indeer Air Quality     Indeer Air Quality     Indeer Air Quality	
Indeer Air Quality 11 15	ons
Gas Leak Detectors 16	
Refrigeration Oil & Vacuum Pump Oil   17-18	
Aerosol Products 19-21	
Specialty Products 22-23	
Insulation Products 24 Stats REFRIGERANT LEAKS Treats 1% - 5 Ton Systems Treats 1% - 5 Ton Systems	
Glycol & Closed Systems 25-26	
Water Treatment & Plumbing Products 27-31	
Water Filtration Maintenance 32	
Water Filtration         33-34         Also available in classic	
Everpure®         35-39         pressurized can packaging.	
Training Classes 40	

### **Total System Protection**

### **The Next Generation of Refrigerant Leak Sealant**



### EasySeal<sup>®</sup> Direct Inject

Now made in the U.S.A., EasySeal Direct Inject is the strongest sealant on the market, with millions of leaks sealed. With this new injection system, pumping down the unit is a thing of the past. The concentrated formula means less material in the system. It is perfect for split systems, heat pumps, microchannel coils, packaged units, and mini splits. EasySeal Direct Inject is formulated to not plug cap tubes or expansion valves. EasySeal Direct Inject-UV is designed to seal leaks and also show where larger leaks are with the use of a UV light.

EasySeal Direct Inject	4050-08	EasySeal Direct Inject-UV Dye	4050-11
EasySeal Direct Inject bulk 6-pack	4050-07	EasySeal Direct Inject-UV Dye 6-pack	4050-12
EasySeal-SS Direct Inject	4050-05	UV Leak Detection Kit	4050-15



### A/C EasySeal®

A/C EasySeal prevents and seals refrigerant leaks in residential and light commercial ACR systems. It is perfect for those hard-to-find and expensive-to-fix leaks and works with all refrigerants (except ammonia). It is easily installed with the reusable piercing valve and hose. A/C EasySeal circulates with the system's refrigerant, and if a leak should occur, it will quickly and permanently seal the leak and prevent the system from losing refrigerant and shutting down.

A/C EasySeal	Pressurized can - treats 1.5 to 5 ton systems	4050-06
A/C EasySeal-SS	Pressurized can - treats fractional to 1.5 ton systems	4050-01
"2+1" Display Pack	2 cans of A/C EasySeal and an A/C Piercing Valve and Hose	4050-02
A/C EasySeal-XL	Treats systems with refrigerant charge of 125 lbs. to 250 lbs.	4050-10
A/C Piercing Valve and Hose	Use with A/C EasySeal, A/C EasySeal-SS and A/C EasyDry	4051-99



### A/C EasyDry

A/C EasyDry is a quick and simple way to prevent and eliminate moisture in a system. A/C EasyDry contains a dehydrating agent that converts system moisture into a natural organic material that is compatible with and mixes with the lubricant. It is great for preventing acid formation, which is caused by moisture in a system, and it works with all refrigerants (except ammonia). Each can will treat up to a 5 ton system and is easily installed with the reusable piercing valve and hose.

Pressurized can	4051-06
A/C Piercing Valve and Hose	4051-99

### **Total System Protection**



### R<sub>X</sub>11-flush®

R<sub>X</sub>11-flush is a unique solvent engineered specifically for flushing refrigeration and air conditioning systems. R<sub>X</sub>11-flush is ozone-safe, non-toxic, and non-flammable. Its patented HFC-based solvent formulation is powerful enough to flush away sludge, carbon residues, oils, acids, water and other particulates. R<sub>X</sub>11-flush is ideal for system flushing after burnouts, during retrofits, and for flushing line sets for R-410A conversions. R<sub>X</sub>11-flush has been the industry's standard for over a decade, and contractors agree — it's the best flush for R-410A retrofits and after compressor burnouts.

Rx11-flush Starter Kit	Contains a 1 lb. canister, Rx11-flush Gun and Hose, and Injection Valve	4300-08
1 lb. canister	Flushes 1-2 line sets	4300-09
"2+1" Display Pack	Contains one Injection Valve and two 2 lb. canisters	4300-10
2 lb. canister	Flushes up to 5 line sets	4300-11
13 lb. canister	Recommended for up to 50 ton system or 30+ line sets	4300-15
26 lb. canister	Recommended for systems over 50 tons or 60+ line sets	4300-26



### R<sub>x</sub>11-flush<sup>®</sup> Liquid

R<sub>x</sub>11-flush Liquid is a unique solvent engineered specifically for flushing refrigeration and air conditioning systems. It remains a constant boiling solvent, and its stronger, faster- acting formula dissolves more oil, moisture, and contaminants than any other flush. It is ideal for line sets, burnouts, and other flushing requirements.

19.5 ounce can	4300-30
Rx11-flush Liquid Starter Kit	4300-38



### **R<sub>X</sub>11-flush® Accessories**

The R<sub>x</sub>11-flush product family also includes various support tools. This includes the Injection Valve for hooking up to a charging hose for flushing and the Flushing Tool for facilitating line set flushing. In addition, the R<sub>x</sub>11-flush Gun with a built-in flushing attachment and the R<sub>x</sub>11-flush Hose (24<sup>"</sup>) are available.

Flushing Tool	4300-50
Rx11-flush Gun	4300-51
Rx11-flush Hose (24″)	4300-52
Injection Valve	4300-89

(Injection Valve fits Pneu-flush® and pressurized Rx-Acid Scavenger® as well)

### **Total System Protection**



A/C Re-New is a highly formulated, OEM approved product that has established an outstanding track record enhancing the performance of air conditioning and refrigeration systems. A/C Re-New frees sticky valves, quiets noisy compressors, reduces energy consumption by lowering starting and running amps, and improves heat transfer in the evaporator and condenser. It's great for new systems as a preventative or to reinstate performance of older systems. It can also assist in oil return with R-22 replacement refrigerants.

1 quart can	4057-54	
4 fluid ounce can	4057-55	
A/C Re-New Injector Tool	4057-99	



### **Rx-Acid Scavenger®**

The most effective way to neutralize or "scavenge" acid in refrigeration and air conditioning systems. Rx-Acid Scavenger is perfect for use after burnouts or during normal on-going system maintenance. In addition, Rx-Acid Scavenger can be used with all lubricants: mineral, alkylbenzene, and polyol ester. Now available in a pressurized can for easy injection into charged systems or hermetically sealed systems.

2 fluid ounce unpressurized bottle	4301-02			
3.8 ounce pressurized can	4301-05			
Injector Valve	4300-89			

(Injection Valve fits R<sub>X</sub>11-flush<sup>®</sup> and Pneu-flush<sup>®</sup> as well)



### **Phase III® Refrigeration Oil Acid Test Kit**

Formulated for use with POEs as well as mineral oils and alkylbenzene, Phase III is an inexpensive, disposable test kit that provides proof-positive that acid level in refrigeration oil is either safe or unsafe. Phase separation makes it easy to see change in color of acid indicator (even if a leak detection dye has been added to the oil). With just two bottles to use, it is simple, safe, accurate, and small enough that you can carry several in your tool box.

1 each

4320-W8

### How to Test Oil with Phase III®

- 1. Pour the solution from the small bottle into 4. Wait two to three minutes. A phase separation the large bottle. The bottom layer of this mixture will be purple.
- 2. Completely fill the small bottle with oil from the unit being tested. Do this immediately after the oil is removed from the crankcase, since exposure to air will contaminate the oil and give a false test result.
- 3. Pour the oil into the large bottle and shake well.
- will develop as the oil rises to the top of the mixture and an aqueous layer forms on the bottom.
- 5. If the bottom layer: Stays purple- the oil is satisfactory. Turns light pink or loses color completelythe oil has higher than acceptable acid content.



# **Coil Cleaner Selection Guide**

### **Coil Cleaner Selection Guide**

EQUIPMENT USED ONCondenser Coils•••••••Mini-Split Condenser Coils••• <th>• • • • • • • • • • • • • • • • • • • •</th>	• • • • • • • • • • • • • • • • • • • •					
Mini-Split Condenser CoilsImage: Constant of the sector of th	•					
Small Condenser Coils••						
Evaporator CoilsImage: Constraint of the						
Mini-Split Evaporator Coils       Image: Color of the state of the st	•					
Small Evaporator Coils     Image: Constraint of the second s	•					
	•					
Microchannel Coils	•					
Electronic Air Filters						
Fan Blades,       Permanent Filters	•					
FORMULATED TO REMOVE						
Greasy Dirt & Oil         •	•					
Cooking Grease     •     •     •     •	•					
Lint, Dust, Dirt & Grime         • <td>•</td>	•					
Tobacco Tars						
Oxide (Corrosion) Deposits • • •						
Cottonwood/ Bugs     •     •     •						
FEATURES & BENEFITS						
Product Type         Alkaline         Alkaline         Alkaline         Acidic         Alkaline         Alkaline         Alkaline	Alkaline					
Foaming Aerosol Liquid  • • • •						
Brightening • • • • • •						
Degreasing • • • • • • • • • • • •	•					
EPA Registered Disinfectant						
No Rinse (Evaporators)						
No Rinse (Condensers)	•					
Biodegradable • • • • • • • • •	•					
USDA Authorized • • • • • • • • •						
U.S. EPA's Safer Choice						
NSF Registered • • • • • • • • • • •						

\* Dilution ratios for no rinse applications: Tri-Pow'r HD = 10:1, Liquid CalClean = 10:1, Special HD CalClean = 40:1, Green Clean = 10:1

### **Coil Cleaner Selection Guide**

Nu-Calgon Coil Cleaners Found on Pages 6-9	Evap-Pow'r®-C		trepfret Fresh®† Rinse	Cal-Green <sup>M+</sup>	Evap-Green	Green Clean <sup>†</sup>	Evap-Foam®	Blackhawk®	Nu-Blast®& Cal-Blast®	CompleteCaref Mini-Split Kit
				EQUIP		D ON				
Condenser Coils				•		•		•	•	
Mini-Split Condenser Coils				•		•		•	•	
Small Condenser Coils				•		•		•	•	
Evaporator Coils	•		•		•	•	•	•		•
Mini-Split Evaporator Coils	•		•		•	•	•	•		•
Small Evaporator Coils	•		•		•	•	•	•		•
Microchannel Coils	•		•	•	•	•	•	•	•	•
Electronic Air Filters										
Fan Blades, Permanent Filters	•			•	•	•	•	•	•	
				FORMULA	TED TO F	REMOVE				
Greasy Dirt & Oil	•			٠	•	•	٠	•	•	
Cooking Grease								•	•	
Lint, Dust, Dirt & Grime	•		•	•	•	•	•	•	•	•
Tobacco Tars										
Oxide (Corrosion) Deposits										
Cottonwood/ Bugs										
				FEATUR	ES & BEN	IEFITS				
Product Type	Alkaline	Alka	aline	Alkaline	Alkaline	Alkaline	Alkaline	Alkaline	Solvent	Alkaline
Foaming		Aerosol	Liquid				•	•		•
Brightening										
Degreasing						•		•	•	
EPA Registered Disinfectant		•	•							•
No Rinse (Evaporators)	•	•	•		•	•*	٠	•		•
No Rinse (Condensers)									•	
Biodegradable	•	•	•	٠	•	•	٠	•		•
USDA Authorized	•									
U.S. EPA's Safer Choice				٠	•	•				
NSF Registered							٠	•		

+ EPA-registered product not available in Canada.



### **Nu-Brite**®

Nu-Brite is the most effective coil cleaner available today. It foams, brightens, and cleans more effectively than acids, particularly in removing grease. Biodegradable. The liquid versions are USDA approved and NSF registered.

18 ounce can	4291-18
1 gallon bottle	4291-08 (NSF)
2.5 gallon pail	4291-05*
55 gallon drum	4291-01



### Foam-Brite®

The ultimate in foaming alkaline cleaners, Foam-Brite cleans and brightens while at the same time providing tremendous foaming to push dirt and grime out of the coil. Can easily be used in place of the more dangerous HF acid-based products. Biodegradable. NSF registered.

1 gallon bottle	4178-08	
2.5 gallon pail	4178-05*	<b>NSF</b>
55 gallon drum	4178-01	



### **Alka-Brite® Plus**

A non-acid, alkaline based product for brightening and cleaning air-cooled condensers, Alka-Brite Plus contains the best available detergents to quickly penetrate and remove oxidation. Its foaming action helps to lift greasy soils out of the coil. Biodegradable. NSF registered.

1 gallon bottle	4120-08	
2.5 gallon pail	4120-05* NS	
55 gallon drum	4120-01	



### **Cal-Brite**®

Cal-Brite is a low pH cleaner developed for cleaning evaporator coils, air-cooled condensers, and other finned cooling and heating coils. Its versatility is based upon glycolic acid and other unique ingredients. It provides moderate foaming and brightening and is safe for use indoors as well as outdoors. It's particularly suitable when lime scale must be removed from outdoor coils.

1 gallon bottle	4133-08
55 gallon drum	4133-01

\* A 2.5 gallon pail wrench is also available. Part Number ZE64.

### **Coil Cleaners**













### TriClean 2x™

The new way to clean a condenser coil. Simply connect to hose, clean, and rinse. TriClean 2x is metal-safe, designed for rapid emulsion of soils from the coil. Restores efficiency and is ideal for painted fin and microchannel coils. Eliminates the need for a sprayer.

1 quart sprayer with hose connector 4372-24

1		
/ .	СГ	• \
( 114	S.F	• )
	UI.	

### Nu-Solve<sup>™</sup> NR

Ready-to-use, no-rinse condenser coil cleaner for situations with limited water availability for rinsing. Nu-Solve NR is also for other applications where it is desirable to have less diluted cleaning solution on a commercial roof or when a solvent-based aerosol approach is not practical. It effectively emulsifies dirt and grime and provides a benefit of leaving a protective treatment on the aluminum for added corrosion protection, making the next cleaning easier. Nu-Solve NR can be applied with any of Nu-Calgon's poly sprayers or the Nu-Solve NR Sprayer (page 10).

1 gallon bottle	4295-08
-----------------	---------

### Tri-Pow'r<sup>®</sup> HD

Tri-Pow'r HD is an outstanding general purpose coil cleaner, providing detergency and degreasing as well as deodorizing capability. Its positive emulsion technology is very effective against oily grime as it converts the deposits into a more liquid form that can be easily rinsed. It is non-acid, non-toxic, and biodegradable. NSF registered. Also great for microchannel coils.

1 gallon bottle	4371-88	(NSE)
55 gallon drum	4371-81	INOL

### **CalClean®**

CalClean is an alkaline detergent formulated for cleaning evaporator coils, air-cooled condenser coils, metal filters, fan blades, and other surfaces soiled with grease, dust and dirt. Biodegradable. USDA approved. Also great for microchannel coils.

1 gallon bottle	4135-08	$\frown$
2.5 gallon pail	4135-06*	(NSF)
55 gallon drum	4135-01	

### Special HD CalClean®

The best non-foaming cleaner available, Special HD CalClean is specifically formulated to remove tobacco tars from electronic air cleaners as well as the most stubborn deposits from finned coils. USDA approved. Also great for microchannel coils.

1 gallon bottle	4143-08
2.5 gallon pail	4143-06*
55 gallon drum	4143-01

\* A 2.5 gallon pail wrench is also available. Part Number ZE64.

### Evap Pow'r®-C

A no-rinse product formulated for cleaning evaporator coils, Evap Pow'r-C is metal-safe, and it cleans and emulsifies even the most stubborn soils and deposits. Biodegradable. USDA approved. Also great for microchannel coils.

1 gallon bottle	4168-08
2.5 gallon pail	4168-05*
55 gallon drum	4168-01



### **Evap Foam No Rinse®**

Evap Foam No Rinse is a high-performing, heavy-duty detergent. It is formulated with special surfactants and alkaline cleaners that have been developed into a foaming, no-rinse product. Evap Foam is ideal for use on most coils, but it is particularly suited for use on cooling or evaporator coils. The aerosol can be sprayed either right side up or upside down. NSF registered. **Can be used with Talon Flexible Aerosol Wand (4776-0) for hard to reach locations (see page 19).** 

18 ounce can	4171-75	NSE	)
		< /	



### Evap-Fresh® No Rinse Evaporator Coil Cleaner & Disinfectant

Evap-Fresh is a ready-to-use, no-rinse cleaner and disinfectant for evaporator coils. It effectively cleans, as well as kills, mold and bacteria. This one-step no-rinse disinfectant cleaner is perfect for air conditioners, commercial air handling units, HVAC cooling coils, refrigeration equipment, and evaporator coils. EPA registered specifically for use on HVAC equipment. **Can be used with Talon Flexible Aerosol Wand (4776-0) for hard to reach locations (see page 19).** 

18 ounce can	4166-75
1 gallon bottle	4166-08

The following products are part of Nu-Calgon's Environmentally Friendly Green Select line. These coil cleaners meet the U.S. EPA Safer Choice Program standards, making them a safer choice for the user and the environment.





### Cal-Green<sup>™</sup> Condenser Cleaner<sup>+</sup>

Cal-Green is a plant-based, natural condenser cleaner that is powerful enough to remove dirt, grease, and grime. It meets the U.S. EPA Safer Choice Direct Release Program standards, making it a safer choice for the user and the environment. This non-foaming, non-toxic concentrate is perfect for cleaning residential or commercial systems and restores their efficiency while being environmentally responsible. Also OEM approved for microchannel coils.

1 gallon bottle	4190-08
55 gallon drum	4190-01

### **Evap-Green<sup>™</sup> Evaporator Cleaner<sup>+</sup>**

Evap-Green is a no-rinse product that is perfect for numerous heating and air conditioning applications, such as evaporator coils, roof top units, window units, metal filters, fan blades, and more. Evap-Green meets the U.S. EPA Safer Choice Direct Release Program standards, making it a safer choice for the user and the environment. It is also biodegradable and will not harm plants, animals, or aquatic life. Metal-safe — meets OEM guidelines for all aluminum coils, including microchannel types.

1 gallon bottle	4191-08
55 gallon drum	4191-01

### **Green Clean<sup>†</sup>**

Green Clean is a pleasantly scented, all-purpose, environmentally friendly cleaner designed for the rapid removal of grease and other heavy soils on coils and other surfaces. It can be used right out of the bottle or diluted for milder jobs. Biodegradable. Also great for microchannel coils. Green Clean meets the U.S. EPA Safer Choice Program standards.

1 quart spray bottle	4186-24
1 gallon bottle	4186-08
55 gallon drum	4186-01



Evep-Oreen



### **Blackhawk®**

Blackhawk is an expanding foam coil cleaner formulated to deeply penetrate the coil. It liquefies to quickly remove grease, grime, or oily soils from deep within the coil. Blackhawk's formulation is safe and problem-free for cleaning evaporator or condenser coils in an occupied building; produces no objectional fumes. It is particularly effective on coils on refrigerators, coolers, and freezers located in restaurants and other commercial establishments. NSF registered. **Can be used with Talon Flexible Aerosol Wand (4776-0) for hard to reach locations (see page 19).** 

18 ounce can	4127-75	NSE	)
	18 ounce can	18 ounce can 4127-75	18 ounce can 4127-75 (NSE



### Nu-Blast®

Nu-Blast is a no-rinse condenser coil cleaner in a convenient aerosol package. Double action of highpressure blast and solvent cleaning restores design efficiency of condenser coils. It is non-flammable and non-conductive. No rinse required — cleaning solvent evaporates completely. Use with adequate ventilation.

18 ounce can

4290-75



### Cal-Blast®

Cal-Blast is a no-rinse condenser cleaner that will powerfully separate undesirable materials from the surface, offering maximum cleaning of finned coils. It's a high-performance aerosol with excellent solvency and blasting spray.

20 ounce can

4132-20

### **Coil Protectants**



### DuraCoil™

DuraCoil is a long-lasting coating for coils and surfaces in corrosive environments. It uses a durable, OEM-approved Heresite<sup>®</sup> coating. DuraCoil has a fast, air-dry formula that bonds to all metals and causes negligible heat transfer loss across the coil. Great for repairing an OEM-approved coil coating that has been compromised while in service! Brown in color.

11 ounce can 4083-90



### Cal-Shield®

Cal-Shield is a synergistic liquid formulation based upon DuPont's Teflon<sup>®</sup> fluoro-additives. It's designed for application on air-cooled condensers, evaporator coils, and other finned heating and cooling coils. Cal-Shield will shield and protect the coil from adverse conditions.

1 quart spray bottle	4148-32
1 gallon bottle	4148-08

### **Sprayers**



### **Coil Gun®**

Coil Gun is a "hose-end" sprayer that features five different mix ratio settings designed for coil cleaners. Utilizes a 2 quart capacity bottle and includes a foam wand as well as "quick disconnect" capability. The Coil Gun Probe accessory has a 90° direction of spray that allows cleaning from inside the coil. It also provides easy access in tough-to-reach locations.

Coil Gun	4774-0
Coil Gun Probe	4774-1



### No. 50P Poly Sprayer

The No. 50P Poly Sprayer is constructed of high-density translucent polyethylene. It has a half gallon (3 pint) capacity. The nozzle is adjustable and the flow rate is controlled by a thumb lever. It comes with a 7<sup>°</sup> polyethylene pump.

1 each 4770-0



### **Coil Mate™ Coil Cleaning Hose**

Durable 5/8 inch diameter reinforced hose with Flex-Guard protection. The 50-foot hose is equipped with solid brass wrench fittings. The Coil Mate is a necessity when using the popular Coil Gun<sup>®</sup> or rinsing an air-cooled coil with water after using a Nu-Calgon coil cleaner.

Coil Mate Hose	61231
Hot Water Hose	61238
Plastic Pistol Grip Nozzle	61241



### No. 100P Poly Sprayer

1 each

1 each

The No. 100P Poly Sprayer is constructed of high-density translucent polyethylene. It has a funnel top for easy chemical pouring and a 1 gallon working capacity. It comes with a 8<sup>°</sup> polypropylene pump, brass handle and extension tube with adjustable nozzle, a wear-resistant hose, and a pressure relief valve.

4770-2

### **Nu-Solve NR Sprayer**

Backpack-type sprayer developed for applying Nu-Solve NR, a no-rinse outdoor coil cleaner when water availability for rinsing is an issue. Sprayer utilizes a fourgallon tank with no holes or connections at the bottom to leak! Provides high-pressure spray for added cleaning effectiveness, large pressure chamber for lasting pressure, and a flexible and rugged wand with an adjustable spray nozzle.

1 each	4775-0
Ξ	
	ING DOLY CONSUM

### No. 200P HiPressure Poly Sprayer

The No. 200P HiPressure Poly Sprayer is constructed of high-density translucent polyethylene. It has a 2 gallon working capacity, funnel top, pump handle, and allbrass hardware. No pumping is required. Pressurize the sprayer with water through a "quick disconnect" fitting.

4771-2



### No. 220CP Poly Sprayer

The No. 220CP Poly Sprayer is constructed of high-density translucent polyethylene with a funnel top that provides easy chemical pouring. This 2 gallon capacity sprayer features an easy fill level indicator and comes with an 8<sup>"</sup> pump and a high resin plastic adjustable nozzle with three feet of hose.

4771-3

R	D

### No. 300P Poly Sprayer

The No. 300P Poly Sprayer is constructed of high-density translucent polyethylene. It has a funnel top and a 3.5 gallon capacity (3 gallon working capacity). It comes with a 10<sup>°′</sup> Celcon pump, brass extension tube with adjustable nozzle, and five feet of vinyl hose.

4772-0



### **Multi-Purpose Sprayer**

1 each

A 24 ounce capacity multi-purpose sprayer. It is ideal for small cleaning jobs, such as window units and water coolers.

1 each	4768-W3
--------	---------

1 each

### Indoor Air Quality



### Breathe cleaner, fresher air!

With the technology installed in over 100,000 applications worldwide, iWave is a complete line of bi-polar, high-output ion generators designed specifically for treating air in air conditioning systems. As the air flows past the iWave, positive and negative ions actively purify the supply air, killing mold, bacteria, and viruses in the coil and living space. The ionization process also reduces allergens, smoke, and static electricity, as well as controls odors (cooking, pet, VOCs) and other particles (no more sunbeams) in the air without creating ozone or any harmful byproducts. Easily installs between air filter and cooling coil to treat the indoor coil; as an alternative, the iWave can be installed in supply air. UL and cUL approved. Includes three-year warranty.



- Patent-pending self-cleaning design, no maintenance needed
- Duct-mount install for systems up to 12 tons (4800 CFM)
- · Waterproof housing for installation inside or outside
- Universal voltage 24VAC to 240VAC
- Programmable cleaning cycle with digital display
- · Integral alarm contact for remote monitoring

### iWave®-R Residential Air Cleaner

- Patent-pending self-cleaning design, no maintenance needed
- For duct systems up to 6 tons (2400 CFM)
- Universal voltage 24VAC to 260VAC
- · Universal mounting typically installs in 15 minutes
- Programmable cleaning cycle with integral alarm contact
- No replacement parts needed

1 each

1 each

1 each

4900-20

4900-10

### iWave®-F Flexible Air Cleaner

- · Versatile ion needles mounted in a flexible bar circuit
- For HVAC cooling coils up to 48" wide
- For ductless systems (mini-split, PTAC), duct systems and ice machines
- Durable bar is chemical and temperature resistant
- Voltage input 110VAC to 240VAC

4900-30

### iWave®-V Residential Air Cleaner

- · Low maintenance air purifier
- For systems up to 6 tons (2400 CFM)
- Installs quickly with universal mounting options and integrated magnets
- Small compact design with no replacement parts
- Voltage input 24VAC
- Typically installs in 15 minutes

### 1 each

4900-40





Wave R











### The Original ClenAir<sup>™</sup> Odor Neutralizer

ClenAir's unique odor neutralizing formula removes odors quickly and permanently. It is a true odor eliminator, not a mask. Originally designed for use in central air systems, on fire and flood restoration jobs and in sewage facilities, ClenAir is a professional product, yet it leaves no lingering antiseptic or perfume smell. It is great for odors caused by fuel oil, smoke, pets, mold and mildew, cigarette and cigar smoke, decay, cleaning solvents, and even skunks. ClenAir has three different scents: Original, CherryAir, and OrangeAir. The scents come in multiple sizes for multiple applications.

Original	Nu-Calgon	ClenAir
Mini Tub	61000	CA1500M
1/2 lb. Tub display box	61001	1500D
1/2 lb. Tub	61002	1500
1 lb. Tub	61003	1501
3 lb. Tub	61004	1503

CherryAir	Nu-Calgon	ClenAir
Mini Tub	61018	CA1800M
1/2 lb. Tub display box	61010	1800D
1 lb. Tub	61011	1801

OrangeAir	Nu-Calgon	ClenAir
Mini Tub	61028	CA1300M
1/2 lb. Tub display box	61020	CA1300D
1 lb. Tub	61021	CA1301

Original	Nu-Calgon	ClenAir
10 lb. Tub	61005	1510
30 lb. Tub	61006	1530
Wall Unit (White)	61007	1300
Gel Brick for Wall Unit (1lb.)	61008	1401

CherryAir	Nu-Calgon	ClenAir
3 lb. Tub	61013	1803
10 lb. Tub	61015	1810
30 lb. Tub	61017	1830

ClenAir	OrangeAir	Nu-Calgon	ClenAir
CA1300M	3 lb. Tub	61023	CA1303
CA1300D	10 lb. Tub	61025	CA1310
CA1301	30 lb. Tub	61027	CA1330



### **HVAC Odor Block®**

ClenAir HVAC Odor Block is not a perfume mask or cover-up. The unique ClenAir formula molecularly reacts with the airborne odor-causing compounds and eliminates them and other indoor pollutants, leaving clean, fresh air behind. The HVAC Odor Block makes it easy to remove odors and improve the indoor air quality in the entire home or building by treating the air through the HVAC system. Use in A/C units, furnaces, rooftop units, fan coil units, and air handlers. Part numbers 61060 and 61061 last up to 3 months. The HVAC Odor Block XL (61070) lasts up to 6 months.

		Nu-Calgon Number	ClenAir Number
ı	Residential HVAC Odor Block	61060	1502
	Residential HVAC Odor Block XL	61070	
	Commercial HVAC Odor Block	61061	CA1015



### **ClenAir Liquid Formula**

ClenAir Liquid is a fast acting deodorizing product. It eliminates odors via an oxidation process while leaving a fresh scent. Applications include HVACR equipment, such as evaporator coils, duct work, condensate pans, refrigeration cases, reach-ins, and walk-in boxes. It can also be poured down drains, garbage disposals, and in trash cans. Spray in restrooms, locker rooms, and on fouled carpeting and upholstery. Used by hospitals, nursing homes, and HVACR technicians.

	Nu-Calgon	ClenAir	
Unscented Spray 16 oz.	61030	1600D	Citrus l
Unscented Liquid 1 gal.	61031	1610	Cherry
Citrus Spray 16 oz.	61033	1700D	Cherry

enAir		Nu-Calgon	ClenAir
600D	Citrus Liquid 1 gal	61035	1710
610	CherryAir Spray 16 oz.	61037	1900D
700D	CherryAir Liquid 1 gal.	61038	1910



### Gel Tabs™ - Condensate Drain Pan Treatment

Formulated with a breakthrough technology for treating air conditioning drain pans and lines. Keeps the drain pan from clogging and eliminates foul and musty odors. When activated by condensation, the tablet will turn to gel and lock into place. Dissolves continuously and completely with nothing left to remove for up to three months. Stack together to increase duration.

3 ton tab (12 in tube)	4185-03	5 ton tab bulk (100)	4185-06	
3 ton tab bulk (200)	4185-04	15 ton tab (1 each)	4185-15	
5 ton tab (6 in tube)	4185-05	20 ton tab (1 each)	4185-20	



### PanPads<sup>+</sup>

PanPads are formulated to eliminate the build-up of bacteria and slime growth in air conditioning and refrigeration condensate drain pans. In laboratory tests, they have been proven effective against a wide spectrum of harmful bacteria, including Legionella. The product is EPA registered for this application. NSF registered.

5 (up to 5 tons)	4295-34	(NSF)	15 (up to 15 tons)	4296-24	(NSF)
5 Slim (up to 5 tons)	4295-36	<b>NOL</b>	45 (up to 45 tons)	4296-45	Mar





Pan-Treat condensate tablets control odors and prevent overflows caused by plugged condensate drain lines. They can also be used in humidifiers. They are very easy to use, as well as non-corrosive, non-toxic, and biodegradable.


1 bottle (200 tablets)

4296-60

### PurCool<sup>®</sup> Green Strips and Tablet

PurCool Strips/Tablets prevent slime, sludge, odors, and overflow of condensate pans. Time release formula adheres to pan and fully dissolves over time. PurCool Green Strips/Tablets use plant-based suspending and dispersing action to keep drain pans clean and free flowing. Products are available for commercial, residential, and mini split applications. Sizes are based on system tonnage, with each strip/tablet lasting up to six months. Biodegradable and environmentally friendly. Will not harm aquatic life.

	Nu-Calgon Number	ClenAir Number
PurCool Green Mini Strip	61044	PCG5MS
PurCool Green Commercial Strip 10 ton	61045	PCG10T
PurCool Green Commercial Strip 30 ton	61046	PCG30T
PurCool Green 3 ton tablet	61048	
PurCool Green 3 ton bulk (200)	61049	
PurCool Green 5 ton tablet	61051	PCG5T
PurCool Green 5 ton bulk (100)	61052	PCG5T-100







Clen Air.











### **PurCool® Strips**

PurCool Strips keep A/C and refrigeration condensate drain pans clean and free flowing. Use PurCool Strips to prevent condensate drain clogs, costly overflows, and corrosion. Just place them anywhere in the drain pan where the PurCool Strip will contact the condensate water and enjoy up to six months of economical protection. PurCool Strips will adhere to the drain pan and will not float or move. Dissolves completely, leaving no residue. Safe for metal and plastic drain pans.

	Nu-Calgon	ClenAir			Nu-Calgon	ClenAir
3 ton strip	61043	1903D		10 ton strip	61041	2003D
3 ton strip bulk (100)	61047	1903D-100		30 ton strip	61040	2009
5 ton strip	61042	2001D	1			

### PurCool<sup>®</sup> Tablets

PurCool Tablets utilize a powerful formulation to keep condensate drain pans clean and free flowing. Use PurCool Tablets to remove sludge and slime in A/C condensate pans to prevent costly water damage caused by overflows. They will control clogs, build-up, odors, and corrosion in drain pans, condensate pumps, and humidifiers.

	Nu-Calgon Number	ClenAir Number
1 bottle (200 tablets)	61053	PC200

### HVAC Carbon Block<sup>®</sup> In-Duct Air Purification System

HVAC Carbon Block is an add-on carbon purifier for all HVAC systems. Improves indoor air quality by removing odors, indoor air pollutants, and VOCs. Treats up to 10 tons for up to nine months.

	Nu-Calgon Number	ClenAir Number
HVAC Carbon Block	61062	CACB10

### Humidifier Panel<sup>™</sup> Replacements

ClenAir Universal Humidifier Panels provide optimum moisture output, performance, and durability. They replace Aprilaire, Honeywell, Carrier, Bryant, Lennox, ICP, and others. Ultra Upgrade Humidifier Panels' material retains water, increasing moisture output and reducing water waste by up to 50%. They replace Aprilaire, Honeywell, Carrier, Bryant, Lennox, ICP, and others.

	Nu-Calgon Number	ClenAir Number
Universal Humidifier Panel - #10 size	61250	CA10
Universal Humidifier Panel - #12 size	61251	CA12
Universal Humidifier Panel - #35 size	61252	CA35
Ultra Upgrade Humidifier Panel - #10 size	61254	CA10UP
Ultra Upgrade Humidifier Panel - #35 size	61255	CA35UP

### **Spacegard® Filter Media Replacements**

These Merv 11 filter media are direct replacements for the Aprilaire Spacegard 201 and 401. Merv 11 media removes pollen, allergens, smoke, dust, dust mites, bacteria, spores, and pet dander. The large filter surface area provides for low resistance and longer filter life - more than 6 months!

	Nu-Calgon Number	ClenAir Number
Replacement for Aprilaire Spacegard 201	61256	CA201
Replacement for Aprilaire Spacegard 401	61257	CA401

\*Aprilaire and Spacegard are registered trademarks of Research Products Corporation

### Indoor Air Quality



### Evap-Fresh® No Rinse Evaporator Coil Cleaner & Disinfectant<sup>+</sup>

Evap-Fresh is a ready-to-use, no-rinse cleaner and disinfectant for evaporator coils. It effectively cleans, as well as kills, mold and bacteria. This one-step, no-rinse disinfectant cleaner is perfect for air conditioners, commercial air handling units, HVAC cooling coils, refrigeration equipment, and evaporator coils. EPA registered specifically for use on HVAC equipment to kill H1N1 and other viruses such as Norwalk, Rhoto, Hepatitis, Rabies MRSA, and more.

18 ounce can	4166-75
1 gallon bottle	4166-08











### CompleteCare Mini-Split Kit<sup>+</sup>

The CompleteCare Mini-Split Kit cleans, disinfects, and deodorizes mini-splits, as well as controls mold and mildew. It also protects condensate pans and lines from plugging. Each kit treats 2-3 mini-splits. Contains one 18 oz. can of Evap-Fresh No Rinse and one PurCool<sup>®</sup> Green Mini Strip.

1 each 4151-08

### **Bio-Fresh® cd<sup>+</sup>**

A ready-to-use bacteriostatic, fungistatic, and deodorizer based upon chlorine dioxide technology. Inhibits the growth of bacteria, mold, mildew, fungi, and yeasts in IAQ applications, and it may be applied to occupied spaces. Its EPA registration applies to HVACR ventilating equipment, including coils, condensate pans, filters, and duct-work. Easily applied by spraying, brushing, sponging, or wiping. EPA registered.

1 quart spray bottle	4126-34
1 gallon bottle	4126-38

### **Bio-Fresh® Fogger**

The Bio-Fresh Fogger is made of a one-piece, seamless heavy-duty copolymer. It uses a 48<sup>°</sup> flexible hose and is adjustable from 0-18 ounces per minute with the respective particle size at 20 to 80 microns. It's ideal for spraying Bio-Fresh cd in duct work and large areas.

1 each	4693-0

### **Drain Solve**

Ideal for condensate pan drains, Drain Solve saves time and money with its ease of use. It eliminates application concerns associated with more reactive, fuming drain openers. Simply pour it down the drain and let it work without fear of noxious fumes or reactions. Does not contain sulfuric acid.

1 quart	4165-24	$\frown$
1 gallon	4165-08	(NSF)
55 gallon drum	4165-01	

### A/C Drain Sucker®

A/C condensate drain pan overflow is caused by slime and sludge that builds up and clogs the drain line. The A/C Drain Sucker quickly removes the clog and the excess water, resolving the overflow problem. The kit includes a PurCool<sup>®</sup> Green 3 ton tablet to provide months of preventive treatment and free flowing drains, as well as all fittings and hoses for suction or pressure applications.

	Nu-Calgon Number	ClenAir Number
A/C Drain Sucker kit	61308	CADS1
PurCool Green 3 ton tab	61048	

 $\ensuremath{+}$  EPA-registered product not available in Canada.

### Gas Leak Detectors



### **Cal-Blue® Plus Gas Leak Detector**

Cal-Blue Plus is a complete gas leak detector with freeze protection to 5°F. Its high viscosity formula enables it to remain

in contact with the applied surface for an extended period of time, allowing it to detect the smallest of leaks. The longest lasting bubbles in the industry! It is also non-corrosive to metal, and it will not affect ultraviolet or black lights. Now available in a non-aerosol pressurized container that can be sprayed at any angle! NSF registered.

4182-53
4182-35 (NSF)
4182-24
4182-08







### Cal-Blue® LT Gas Leak Detector

The same high quality formulation as regular Cal-Blue Plus, but it has added freeze protection to -20°F. It is the ideal detector for geographical areas that may experience very cold temperatures. The longest lasting bubbles in the industry! NSF registered.

1 quart spray bottle	4183-24	NSF.)
1 gallon bottle	4183-08	NOF

### **Gas Leak Detector**

The original industry leak detector. A high viscosity liquid that forms bubbles when daubed on a gas leak. Non-corrosive, non-staining, and harmless to skin. Detects any type of gas leak, such as air, compressed air, carbon dioxide, nitrogen, natural gas, and refrigerant gases. Freeze protection to -20°F. Six ounce plastic bottles have dauber in cap. USDA approved.

6 ounce bottle with dauber	4180-53	
----------------------------	---------	--

### **Fluorescent Gas Leak Detector**

A fluorescent formulation that provides improved visibility and long lasting bubbles. It is non-corrosive to metals and is freeze protected to 5°F. Suitable for high and low temperature applications. Can be used for most refrigerants, natural gas and oxygen systems. USDA approved.

8 ounce bottle with dauber	4184-53
1 quart spray bottle	4184-24
1 gallon bottle	4184-08

### AccuTrak® Ultrasonic Leak Detector

Model VPE - Now with touchprobe included. Patented technology detects the ultrasonic sound of a leak!

	Nu-Calgon Number	ClenAir Number
AccuTrak® Ultrasonic Leak Detector	61307	CAVPE

### Polyol Ester (POE) Lubricant



### **Emkarate® RL Lubricant**

The Emkarate family of polyol ester refrigeration lubricants are designed specifically for use with HFC refrigerants. They are available in a range of viscosities. They have excellent thermal and chemical stability, and they are compatible with a wide range of elastomers, polymeric materials, and other materials of construction. Fully miscible and compatible with mineral oils and alkylbenzene lubricants, as well as with CFCs, HCFCs, and HFCs.

Emkarate RL	Viscosity	1 Quart	1 Gallon	5 Gallon	53 Gallon
22H	100 SUS		4313-46		
32H	150 SUS	4314-44	4314-46	4314-45	4314-41
32HB	150 SUS			4314-62	
32-3MAF	150 SUS	4314-64	4314-66	4314-65	4314-67
46H	200 SUS		4315-46		4315-41
68H	300 SUS	4316-44	4316-46	4316-45	4316-41
68HB	300 SUS		4316-86	4316-85	
68HP	300 SUS		4316-76		4316-71
100E	500 SUS		4317-66		4317-61
100H	500 SUS		4317-46		
170H	850 SUS		4318-26	4318-25	4318-21
220H+	1100 SUS		4318-66	4318-65	4318-61
220XL	1100 SUS			4318-75	

### Mineral Oil



### C-3s, C-4s, C-5s Refrigeration Oil

These are mineral naphthenic lubricants manufactured by Calumet Lubricant Company and available in three viscosities. They are specifically designed for today's high performance air conditioning and refrigeration compressors using CFC and HCFC refrigerants. These compressors run at higher speeds and generate higher temperatures, and as a result, they require better lubrication. Use of these oils will ensure continued efficient operation.

Nu-Calgon	Viscosity	1 Gallon	5 Gallon	55 Gallon
C-3s	150 SUS	4303-07	4303-05	4303-01
C-4s	300 SUS	4304-07	4304-05	4304-01
C-5s	500 SUS	4305-07		4305-01

### Polyvinyl Ether (PVE) Lubricant



### **Idemitsu Polyvinyl Ether Lubricant**

PVE lubricants provide for increased stability and lubrication. They do not hydrolyze in the presence of moisture, a very important feature in HVACR applications. Additionally, they are compatible with other refrigeration oils and process fluids. PVE lubricants also exhibit compatibility and performance with frequently used anti-wear additives.

Idemitsu	Viscosity	1 Quart
FVC32D	150 32 SUS	4319-14
FVC68D	300 68 SUS	4319-24

### Alkylbenzene Oil



### Zerol<sup>®</sup> Alkylbenzene Refrigeration Oil

Zerol Refrigeration Oil is recommended for use in all refrigeration and air conditioning applications using CFC and HCFC refrigerants. It is highly recommended by refrigerant and compressor manufacturers for use with R-22 and other HCFC blends such as R-409A as it provides many distinct advantages: excellent miscibility, excellent thermal stability, and low temperature performance compatibility with mineral oils. It is the oil of choice for R-22 and R-502.

Zerol	Viscosity	1 Gallon	5 Gallon	55 Gallon
150	150 SUS	4310-07	4310-05	4310-01
200TD	200 SUS	4308-07	4308-05	4308-01
300	300 SUS	4311-07	4311-05	4311-01
400CA	400 SUS		4311-65	
500	500 SUS		4312-05	

### Vacuum Pump Oil



### **Vacuum Pump Oil**

Nu-Calgon's Vacuum Pump Oil is a quality, high-grade lubricant that performs at the deepest vacuum. It has a very low vapor pressure, and it has excellent lubricity for complete surface protection. It contains no additives or detergents.

1 pint bottle	4383-34
1 quart bottle	4383-24
1 gallon bottle	4838-07

### **Refrigeration Oil Products**



### **Refrigeration Oil Charging Pump**

An oil pump for charging refrigeration oil into a system, even while it's running. This pump can be used for 1 gallon, 2.5 gallon, and 5 gallon containers. Incorporates an automatic bleed valve that keeps pressure equalized inside the container and includes a tapered rubber adapter that fits all container openings without the need for additional adaptors.

1 each	4814-40
--------	---------

### **Total Lube Refrigeration Oil Test Kit**

Have a professional lab analyze the oil to help detect potential problems such as metal wear or burnouts. The analysis will provide information on the oil's moisture, total acid number, viscosity, color, and spectrochemical analysis on 20 plus metals and compounds. Help prevent potential downtime, burnouts, and costly oil changes by incorporating regular testing of the refrigeration oil.

1 each	4996-0

### **Oil Refractometer**

The Oil Refractometer is a precision optical instrument that allows for the rapid and accurate determination of the refractive index of oil solutions. It will specifically assist in determining the percent of residual oil remaining in a refrigeration system when converting it to a new refrigeration oil. Such retrofits require converting the mineral oil to a polyol ester (POE) or polyalkylene glycol (PAG), an alkylbenzene lubricant (Zerol<sup>®</sup>) to a POE, or a mineral oil to an alkylbenzene.

1 each	4815-0

### **CanVerter**®

Canverter is a hand-held pump used to remove or add oil to hermetic compressors. Easy to use; each stroke pumps 1 ounce of oil.

1 each

4814-0

### Aerosol Coil Cleaners



### **Blackhawk®**

Blackhawk is an expanding foam coil cleaner formulated to deeply penetrate the coil. It liquefies to quickly remove grease, grime, or oily soils from deep within the coil. Blackhawk's formulation is safe and problem-free for cleaning evaporator or condenser coils in an occupied building; produces no objectional fumes. It is particularly effective on coils on refrigerators, coolers, and freezers located in restaurants and other commercial establishments. NSF registered. **Can be used with the Talon Flexible Aerosol Wand (4776-0) for hard to reach locations.** 

4127-75

**NSE** 



### **Nu-Brite**®

18 ounce can

Nu-Brite is a very effective degreaser and cleaner on condenser coils. Its high foaming characteristic will help push soil deposits out of the coil, leaving it clean and bright. With proper ventilation, it can also be used as a kitchen degreaser by emulsifying stubborn, resistive grease deposits found on coils located in kitchens. Product should be used where adequate rinsing is possible.

18 ounce can

4291-18

### Foam Rinse on two

### **Evap Foam No Rinse®**

Evap Foam No Rinse is a high-performing, heavy-duty detergent. It is formulated with special surfactants and alkaline cleaners that have been developed into a foaming, no-rinse product. Evap Foam is ideal for use on most coils, but it is particularly suited for use on cooling or evaporator coils. The aerosol can be sprayed either right side up or upside down. NSF registered. **Can be used with the Talon Flexible Aerosol Wand (4776-0) for hard to reach locations**.

18 ounce can	4171-75	NSF



### Evap-Fresh® No Rinse<sup>+</sup>

Evap-Fresh is a ready-to-use, no-rinse cleaner and disinfectant for evaporator coils. It effectively cleans, as well as kills, mold and bacteria. This one-step norinse disinfectant cleaner is perfect for air conditioners, commercial air handling units, HVAC cooling coils, refrigeration equipment, and evaporator coils. EPA registered specifically for use on HVAC equipment. **Can be used with the Talon Flexible Aerosol Wand** (4776-0) for hard to reach locations.

```
18 ounce can
```

```
4166-75
```



### Cal-Blast®

Cal-Blast is a no-rinse condenser cleaner that will powerfully separate undesirable materials from the surface, offering maximum cleaning of finned coils. It's a high-performance aerosol with excellent solvency and blasting spray.

	20 ounce	can

/11	27	-20
4	32	-20



### Nu-Blast®

A no-rinse condenser coil cleaner in a convenient aerosol package. Double action of high-pressure blast and solvent cleaning restores design efficiency of condenser coils. It is non-flammable and nonconductive. No rinse required — cleaning solvent evaporates completely. Use with adequate ventilation.

18 ounce can

4290-75



### Talon

1 each

Talon is a flexible aerosol wand for Nu-Calgon's Evap Foam No Rinse, Blackhawk, Evap-Fresh No Rinse or PenetrateHD products. Provides focused cleaner spray or penetrant in tough-to-reach locations. The Talon is highly flexible, retains shape memory, and provides 27 inches of added length to an aerosol canister for navigating in tight quarters inside the equipment. The reusable Talon is a must-have service tool!

4776-0



+ EPA-registered product not available in Canada.

### Aerosol Specialty Products



### **CleanVu Glass Cleaner**

CleanVu is a highly effective aerosol cleaner for glass and all hard, non-porous surfaces. Its fast-drying, non-filming formula cleans dirt and grime, providing streak-free shine. Ideal for cleaning glass doors on refrigeration cases, CleanVu leaves behind nothing but clear shine and a pleasant lemon scent. Simply spray on glass and wipe off with a soft cloth.

19 ounce can	4081-85
	19 ounce can



### **Stainless Steel Cleaner**

Nu-Calgon's aerosol Stainless Steel Cleaner removes light soil and restores shine to stainless steel, chrome and hard, washable surfaces. Stainless Steel Cleaner is an oil based cleaner that is ideal for cleaning refrigerated display cases, stainless steel appliances, brushed aluminum, and other shiny metal surfaces. Spray on a small area at a time, and overlap cleaned areas, polishing to perfection!

15 ounce can	4084-75
15 ounce can	4084-75



### DuraCoil

DuraCoil is a long-lasting coating for coils and surfaces in corrosive environments. It uses a durable, OEM-approved Heresite<sup>®</sup> coating. DuraCoil has a fast, air-dry formula that bonds to all metals and causes negligible heat transfer loss across the coil. Great for repairing an OEMapplied coil coating that has been compromised while in service! Brown in color.

4083-90

11 ounce can



### A/C Shine<sup>®</sup> Superior Cleaner/Protectant

A/C Shine is specially formulated to clean and protect the painted metal surfaces of outdoor A/C condensing units. It sprays on and wipes off quickly and easily without water. For use on all outdoor unit painted surfaces.

	Nu-Calgon	ClenAir
12 oz.	61118	ACS12



### **Pipe-Dri®**

Pipe-Dri aerosol insulation provides a moisture barrier to stop sweating and dripping on refrigeration lines, air conditioning lines, and other cold surfaces. Quickly adheres and dries to a hard waterproof coating. Pipe-Dri makes it possible to insulate hard-to-reach areas.

18 ounce can	4297-75
--------------	---------



### **Zinc Rich Cold Galvanizing**

Zinc Rich is highly resistant to nearly all forms of corrosion. Perfect for repairing factory galvanized material damaged in shipment, welding, assembly, etc. Its 95% pure zinc film fuses itself to iron, steel, or aluminum. Blends well with hot-dip coating. Meets or exceeds military specifications MIL-P- 26915A, MIL-T- 26433, MIL-P- 21035, MIL-P-46105 and the Preece Test.

13 ounce can

4087-03



### **Pump Protector**

Protects seasonally operated pumps against corrosion during shutdowns by "winterizing" them. When corrosion occurs in close-tolerance areas, it can cause the impeller to stick or bind. It is safe for all types of water pumps and requires no special rinsing at start-up.

10 ounce can 4299-T8



### **Degreasing Solvent EF**

A degreasing solvent, specially formulated for cleaning and degreasing equipment where washing or flushing is not possible. Simply spray on and wipe off. Penetrates quick and deep, loosening and liquefying heavy greases and tar. Non-corrosive and non-staining with a dielectric strength over 26,000 volts.

14 ounce can	4083-75
14 ounce can - LV*	4083-83

\* LV = Low VOC for California

### **Aerosol Specialty Products**



### **Pan-Spray®**

Pan-Spray is an effective, easy-to-use waterproof rubberized coating that won't chip, flake, or peel. It's ideal for sealing out rust and corrosion as well as repairing leaky condensate pans, cooling towers, swamp coolers, roofing, gutters, and down spouts. Pan Spray is the perfect solution for emergency and permanent repair.

	16 ounce can - White	4296-50
	16 ounce can - Black	4296-51

**Super Penetrating Lubricant** 



### Nu-Kill<sup>®</sup> II<sup>†</sup> **Wasp and Hornet Killer**

A "quick-kill" spray formulation EPA registered to instantly and effectively kill wasps, hornets, and yellow jackets, from distances up to 20 feet. Nu-Kill II also kills with residual action as wasps and hornets return to a treated nest. The formula is safe in and around electrical equipment, having a dielectric strength of 47,000 volts.

13.5 ounce can 4292-75



### PenetrateHD loosens rusted and frozen metal parts. Frees stuck fan blades, blower

**PenetrateHD®** 

shafts, pulleys, rusted nuts and bolts, and any frozen, rusted, or seized metal part. Unique low surface tension formula penetrates into the smallest spaces and breaks and dissolves the bonds of rust and corrosion. Lubricates, protects metals and displaces water. Dielectric strength 40,000 volts. Can be used with the Talon Flexible Aerosol Wand (4776-0) for hard to reach locations.

12 ounce can	61105
17 ounce can	61106
12 ounce can - LV*	61107
17 ounce can - LV*	61108

\* IV = Low VOC for California



### **Electrical Contact Cleaner**

Cleans, lubricates, and protects electrical contacts from corrosion, and it is safe on most plastics. Cleaning action quickly removes greases, dust, and oxidation, restoring and maintaining precision and efficiency to the instrument and component. Includes extension tube for pinpointing application. Dielectric strength over 25,000 volts. USDA approved.

11 ounce can	4082-03
14 once can - LV *	4082-04

\* LV = Low VOC for California and Canada



### **Food-Grade Silicone**

Food-Grade Silicone sprays a perfect nonstick surface on ice machine surfaces, vending machines, coin slots, slicing machines, dairy machinery, and other food processing and packaging equipment. An excellent lubricant that prevents binding and sticking. Contains ingredients approved by the FDA for food contact use. USDA approved.

11 ounce can

4084-03



### **V-Belt Dressing**

V-Belt Dressing is specially formulated to penetrate and extend modern V-Belt life. It is particularly effective in maintaining V-Belt efficiency and performance under today's increasing performance requirements. It keeps belts pliable, prevents slippage, and does away with squealing and chattering. Also good for leather, rubber, canvas and other fabric belts, flat or round. USDA approved.

11 ounce can

4086-03

### **Aerosol Adhesives**



### Spray-n-Bond™

Spray-n-Bond is a wide web spray adhesive formulated specifically for insulation and duct liner applications. Ideal for porous surfaces, it is waterproof, flexible, transparent, and nonstaining. Formulated with the environment in mind, it contains no chlorinated solvents or ozone depleters. Will work with cardboard, most plastics and cloth. Cleans easily with degreasing solvent.

12 ounce can 4369-75



### **Spray Adhesive**

12 ounce can

Spray Adhesive is a fast-drying, all-purpose product that provides a strong, water-resistant, flexible bond. It is translucent and does not penetrate or soak material causing bleedthrough. Spray Adhesive is excellent for labeling, bonding, splicing and sealing paper, cardboard, cloth, rubber, styrofoam, canvas, leather, wood, and most plastics.

+ EPA-registered product not available in Canada.

4080-04

### **Specialty Products**





**Duick Se** 



### **Great Wipes**

Great Wipes Industrial Strength Hand Towels are waterless wipes made specifically for the air conditioning, refrigeration, and plumbing service technician. Each premoistened, heavy duty towel has strong pumice scrubbing power that conveniently cleans anywhere and anytime.

75 count canister	4185-75	(	NSF		
			$\sim$	/	

### Scrubs-In-A-Bucket<sup>®</sup> HVAC80

The original Scrubs — disposable, pumice-performance waterless hand cleaner towels that effectively and quickly clean hands on a wide variety of industrial soils and greases. Each self-dispensing portable canister contains perforated disposable heavy-duty towels and are pre-moistened with the famous Scrubs cleaning formulation. Effective yet gentle to the skin. Use anywhere, anyplace, anytime.

30 count canister	4366-24	NSF-
80 count canister	4366-87	INDE

### Quick Seal<sup>™</sup> Pipe Repair

A permanent knitted fiberglass impregnated tape that is designed for quick, in-the-field repair of leaks for all types of pipes. It can be used on both cold or hot water, as well as refrigeration, plumbing, industrial, commercial, and residential applications. It is safe for potable water and is UL listed. ANSI/NSF Standard 61.

1	2″ x 3´ wrap	4299-10
	4″ x 12´ wrap	4299-11

### Pneu-flush®

A flushing and cleaning system specifically designed for pneumatic control air lines. It utilizes DuPont<sup>®</sup> Vertrel<sup>®</sup> XM, a premier ozone-safe HFC cleaning solvent. Pneu-Flush works quickly and easily to clean and purge the compressed air lines in HVAC control and other pneumatic systems.

2	lb. canister	4298-01
h	njection Valve	4300-89

(Injection Valve fits R<sub>X</sub>11-flush<sup>®</sup> and Pressurized Rx-Acid Scavenger<sup>®</sup> as well)

### Thermo-Trap<sup>®</sup>

Thermo-Trap is the industry's original heat absorbing paste designed to isolate heat encountered in soldering, welding, and brazing, thereby preventing damage to nearby heat sensitive controls or fittings. USDA approved. Biodegradable.

11 ounce tube 4371-36	
-----------------------	--



### Thermo-Trap<sup>®</sup> Gel

Thermo-Trap Spray gel is designed to form a protective barrier to keep flames and heat from damaging areas beyond direct work surfaces during brazing or soldering. It will protect drywall, wiring, joists, and surrounding areas that a flame could also come in contact with. Cleans up easily with no residue.

1 quart spray bottle	4371-32
4 fluid ounce spray bottle	4371-53



### **Degreasing Solvent EF**

Degreasing Solvent EF is a volatile solvent, especially formulated to provide effective cleaning and drying and reduce safety hazards. It leaves surfaces clean and oil-free. The thorough cleaning action is superior to ordinary chlorinated solvents.

1 gallon	4162-07	
1 gallon - LV*	4162-17	
	* LV = Low VOC fo	or California

### **General Purpose Cleaners**





### **Other Specialty Products**



### **Grez-Off® Heavy Duty Degreaser**

Grez-Off works hard so you don't have to. This heavy-duty answer to heavy-duty grease and grime leaves engines, machinery, asphalt, garage floors and more whistle clean. Biodegradable, non-flammable formula hits hard and fast with less impact on user and environment.

	Nu-Calgon Number	ClenAir Number
1 gallon	61116	22701
32 oz. spray	61117	23732

### Spray Nine<sup>®</sup> Cleaner & Disinfectant<sup>+</sup>

Spray Nine is a tough task cleaner and broad spectrum disinfectant. EPA-registered disinfectant kills harmful germs like HIV-1, Influenza, H1N1, Staphylococcus Aureus, Salmonella Choleraesuis and E. Coli in 45 seconds. Also helps prevent cross contamination. Authorized by USDA for use in federally inspected meat and poultry plants with a C-1 rating.

	Nu-Calgon Number	ClenAir Number
1 gallon	61110	26801
32 oz. spray	61113	26832

### Elite® Performance Windshield Washer Fluid -20°

Elite Performance Windshield Washer fluid is independently tested to provide freeze protection to -20°F. Don't take chances with generic washer products; only Elite Performance offers certified protection.

	Nu-Calgon Number	ClenAir Number
1 gallon	61115	CAWW1G



### **ClenHands: Orange Smoothie™, Orange Crush™ and Cherry Crush™**

Premium antimicrobial hand cleaners that quickly dissolve dirt, grease, fuel oil, pipe dope, resin, ink, paint, glue, rubber gasket and tile cements, and many other hard-to-remove soils. ClenHands Orange Smoothie is a smooth non-pumice formula. ClenHands Orange Crush is enhanced with fine-ground American pumice. ClenHands Cherry Crush is a cherry-scented antimicrobial hand cleaner with pumice. For use with or without water.

		Nu-Calgon Number	ClenAir Number
Orange Crush with Pumice	1 gallon	61201	2201
Orange Smoothie Non Pumice	15 oz.	61202	2202
Orange Crush with Pumice	15 oz.	61203	2215
Cherry Crush with Pumice	15 oz.	61204	2315
ClenHands Super Gel	11 oz.	61205	2414



+ EPA-registered product not available in Canada

### Smoke Signal<sup>™</sup> Smoke Candles and Smoke Pens

Smoke Signal generates smoke by chemical reaction, eliminating costly equipment and time to pinpoint leaks. Smoke tests will effectively and inexpensively reveal leaks in heating and air conditioning duct work, furnaces, fire boxes, exhaust fans, and smoke detectors. Smoke Pens are also excellent for observing ventilation, air balancing, smoke detectors, drafts, leakage, and air flow. The Smoke Pens come with one pen, six replacement wicks (refills available), and instructions. Smoke Signal items contain no explosive materials.

	Nu-Calgon Number	ClenAir Number
Smoke Candle - 4000 cubic feet of smoke 30 sec 1A	61302	CAS30
Smoke Candle - 8000 cubic feet of smoke 60 sec 2B	61303	CAS60
Smoke Candle - 40,000 cubic feet of smoke 2-3 min 3C	61304	CAS180
Smoke Pen	61305	CASP1
Refill Package - 6 wicks	61306	CASP1RW

### **Insulation Products**

Perma-Wrap

Perma-Wrap



### **Perma-Wrap**<sup>™</sup> **Foam Insulation Tape**

Perma-Wrap is formulated from the highest quality elastomeric thermal insulation material. Its closed cell construction seals out air and moisture, slowing down heat transfer, and can be used on hot or cold water pipes, chilled water, and refrigerant lines to prevent sweating and condensation. Service temps as low as -40°F with a high continuous temperature of 160°F and a high intermittent temperature of 220°F.

2" x 1/8" x 30' roll - dispenser package 4218-12	2" x 1/8" x 30' roll	4218-W3
		4218-12



### **Cork Tape**

Cork Tape is formulated and manufactured as an insulating material for preventing sweating and condensation on refrigerant lines, cold pipes, and other commercial refrigeration and A/C systems. Serves as an excellent insulator on hot pipes, and can also be used as a gasketing material, a sound-deadening material, and for wrapping valves, tees, and fittings. Service at temps as low as -30°F, as high as 200°F and won't sag up to 350°F.

2″ x 1/8″ x 30′ roll 4217-W3



### Foam-Tite®

Foam-Tite is an economically priced tape formulated from quality thermal insulation material. With closed cell construction, it can be used on cold water pipes and chilled water and refrigerant lines to prevent sweating and condensation. Can also be used on hot water lines for better insulation against heat loss. Service temperatures of -15°F to 160°F.

2″ x 1/8″ x 30′ roll 4219-12



### **Cork-Tite®**

Cork-Tite is an economically priced tape used to insulate cold pipes and stop condensation problems. Ideal for preventing heat loss in hot pipes, and used as an effective sound dampening material. Also sticks to dry metals and seals tightly without drying, while staying flexible within the service temperatures of -5°F to 200°F.

2″ x 1/8″ x 30′ roll 4217-12



### **Foam Tape PE**


Foam-Tape PE is an insulation tape with closed cell construction, providing an economical way to prevent sweating or condensation on air conditioning, refrigeration, chilled water, or other cold lines. Also used on hot water lines for insulation against heat loss, with service temperatures of -70°F to 175°F.

2" x 1/8" x 30' roll 4219-20



### **Thumb-Tite®**

Thumb-Tite is formulated and manufactured for use in many sealing, insulating, and general indoor/outdoor maintenance applications. Excellent adhesion capability and is nonstaining, non-hardening, and unaffected by wide variations in temperature - an excellent thumbing grade. Each box contains two 1-pound bars. Service temperatures of -20°F to 350°F.





### **Nu-Foam®**

Nu-Foam is double expansion polyurethane foam with all-direction dispersing. Used as a sealant and insulating product on openings created for refrigeration, air conditioning and heating tubes or pipes, duct joints, and other areas where unwanted air penetration might occur. Contains no CFCs or HCFCs, and is fire retardant and UL listed.

12 ounce can	4293-04
20 ounce can	4293-75



### **Sealing and Caulking Cords**

Sealing and Caulking Cords are nonstaining sealers formulated to be water-resistant, dust-resistant, and white in color. They securely adhere to most surfaces and provide excellent insulation value. They are available in 3/8" pre-shaped extruded cords, with serrated release paper. Used indoors and outdoors, it stays flexible at -20°F and non-sagging at 350°F.

3/8" x 25' roll 4216-27

(NSE)

### **Propylene Glycol**

	burst protection. Freez-Kontr'l 95/5 — a fully concentrated (~100%), inhibited propylene glycol product. Freez-Kontr'l 35 — formulated with 35% propylene glycol for use as a secondary coolant in supermarket rack applications.		
Freez-Kontr'l	1	gallon bottle	4188-07
	5	gallon pail	4188-05
	55 gallon drum 4188-02		4188-02
Freez-Kontr'l 95/5	Freez-Kontr'l 95/5 5 gallon pail 4188-06		4188-06
	5	5 gallon drum	4188-03

55 gallon drum 4188-35 55 gallon drum 4188-04

**Burst-Kontr'l® AP-100** 



**Freez-Therm®** 

special order.

1 gallon bottle

5 gallon pail

Burst-Kontr'l is a specially formulated propylene glycol heat transfer solution for use in boilers having aluminum heat exchangers. It has corrosion inhibitors to protect aluminum, copper, solder, brass, and steel. Provides burst protection to -100°F and freeze protection to -60°F.

5 gallon pail	4187-15

Freez-Therm is an inhibited heat transfer fluid and anti-freeze based upon ethylene glycol. It can be used in chilled water, hydronic, and other closed systems for both freeze point suppression and corrosion inhibition. An uninhibited version is also available in drums on

4189-07

4189-05 4189-01

### **Ethylene Glycol**

Freez-Kontr'l 35

Freez-Kontr'l FG



### **Glycol Equipment**





### 55 gallon drum

### **Glycol Refractometer**

An accurate and economical tool for ensuring proper levels of glycol treatment in HVAC fluid systems. Removes guess work and prevents wasteful over-treatment. It has metal body with cushioned eyepiece, focus adjustment, and a rubber hand grip. A calibration screwdriver, calibration fluid, a plastic pipette, optical cleaning cloth, and a rugged carrying case are included.

	Nu-Calgon Number	ClenAir Number
1 each	61301	GLY32

### **Glycol/Oil Transfer Pump**

Heavy-duty pump designed to transfer Freez-Kontr'l®, Freez-Therm®, or oil products (up to 1000 sus) from Nu-Calgon supplied 55 gallon drums to their application.

1 each	4817-0
--------	--------

### Closed Systems & Steam Boilers









### Winter Treat<sup>®</sup>

Winter Treat is a multi-treatment product for hot water and steam heating boilers and other closed water systems. It emulsifies and cleans away rust and corrosion deposit sludge, as well as inhibits system corrosion, foaming, surging, and lime scale. Typical use is one quart per 25 gallons of water.

1 quart bottle	4390-32
1 gallon bottle	4390-08

### Ty-lon<sup>®</sup> B20

Ty-Ion B20 is a liquid nitrite-borax corrosion inhibitor and dispersant for closed recirculating systems. It combines corrosion inhibitors, a unique copolymer dispersant, and a color indicator to facilitate leak detection, into a complete treatment for hot and chilled water closed systems containing ferrous and non-ferrous metal components.

5 gallon pail 75	37-05
------------------	-------

### Ty-lon<sup>®</sup> B14A

Ty-lon B14A is an all-in-one boiler treatment product that controls scale, corrosion, and condensate line corrosion in low pressure, low make-up steam heating boilers where 90% or more of the condensate is returned. It is chromate-free and contains a color indicator for visual determination of treatment residual. Its balanced formulation provides an energy-efficient way of heating.

5 gallon pail	7519-05
---------------	---------

### **System Cleaner**

System Cleaner is a liquid, heavy-duty industrial alkaline cleaner specifically formulated to emulsify and clean equipment surfaces and pipe fouled by cutting oils, grease, lubricants, corrosion products, and other debris.

5 gallon pail

4370-0	8
4370-0	8

### Water Test Kits

### **Bacteria Test Kit**

Kit contains 10 agar paddle tests that are used to monitor bacterial contamination in cooling tower and evaporative condenser water. Test can be performed in a lab or on site. Each side of the paddle is coated with TTC Agar, material that supports growth of most common bacteria. Regular testing will detect and show when bacteria counts are rising.

1 each	4802-0
--------	--------

### **Complete Test Kit**

The complete test kit for cooling water and boiler water application testing. In addition to pH, this kit also provides tests for obtaining alkalinity, nitrite, hardness, sulfite, and chloride levels.

1 each	W017-0
--------	--------

### No. 89A Test Kit

No. 89A Test Kit contains tests for determining hardness, pH, chloride and alkalinity, as well as treatment residual tests for Ty-Ion C70, Cal-Treat 233, No. 340 Liquid Scale Inhibitor, and Ty-Ion B20.

1 each 4798-2

### **Bromine/Chlorine Test Kit**

Kit measures free and combined halogen (chlorine, bromine), and it should be used to support treatment with Bromicide Tablets. Residual can be expressed as 0.2 ppm or 0.5 ppm of free halogens. Dropper technique is used.

1 each 4803-0

### **Nitrite Test Kit**

Used for testing treatment residual of Ty-Ion B20 and Ty-Ion B14A. It is a cerric ammonium nitrate (can) titration method, and it can be used in systems containing glycol. Each drop equals 40 ppm of nitrite.


1 each	4797-0
--------	--------

### **Organic Phosphonate Test Kit**

Used to determine the treatment residual of No. 340 Liquid Scale Inhibitor, Ty-Ion C70, and Cal-Treat 233.

1 each 4804-0

### Scale Removal

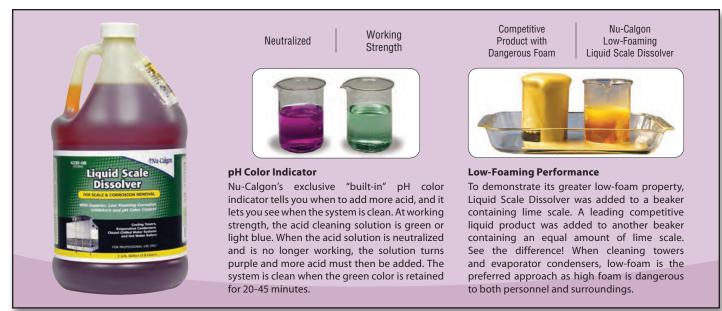

### **Liquid Scale Dissolver**

Liquid Scale Dissolver is a hydrochloric (muriatic) acid formulated to remove calcium scales from cooling towers and other water-cooled equipment. It contains low-foaming corrosion inhibitors and a built-in pH color indicator to let you know when the acid has been neutralized. pH test paper is also included. USDA approved.

1 gallon bottle	4330-08
5 gallon pail	4330-05
55 gallon drum	4330-01



### Eco-Lyme®

Eco-Lyme is a new chemistry for the HVACR market that provides a unique blend of performance with a desired eco-profile. The product is specially formulated to achieve descaling behavior of competing hydrochloric acid-based chemistry descalers. However, the active ingredient is substantially safer on equipment metals. Eco-Lyme is ideal for stainless steel construction to eliminate potential issues of localized corrosion/pitting caused by repeated use of hydrochloric acid. Eco-Lyme is odorless, making it safer to use in the field. NSF registered.

1 gallon bottle	4167-08
5 gallon pail	4167-05 (NSE)
55 gallon drum	4167-01



### Season Start<sup>®</sup> "Imperial Grade" Scale Remover

Season Start is a powdered sulfamic acid formulation that contains the best inhibitors available for protecting all metals, including galvanized metal. It is the best and the safest dry acid cleaner available. It contains a built-in pH color indicator to let you know when the acid solution has been neutralized, as well as wetting and anti-foaming agents. USDA approved.

10 lb. container	4360-88
50 lb. pail	4360-84

Initial Dosage Recommendation			
Tons of Horsepower Liquid Scale Dissolver		Eco-Lyme	Season Start
10	2 gallons	4 gallons	10 lbs.
30	5 gallons	10 gallons	30 lbs.
50	10 gallons	20 gallons	50 lbs.
90	15 gallons	30 gallons	75 lbs.

### Water Heater Scale Removal



### Feeding Equipment





### Scale Prevention







### Vital-Flo® Tankless Water Heater Descaler Kit

The Vital-Flo Tankless Water Heater Descaler Kit is a complete service tool for descaling tankless water heaters. It consists of a submersible descaler pump, a set of 5-foot long hoses with 3/4" female hose threaded assemblies, formulated descaler solution packaged in a lidded 4 gallon chemical resistant container. The solution is also available separately. NSF registered.

Vital-Flo kit	4387-01	NCE
Vital-Flo descaler solution	4387-02	NSE)

### No. 31-TX1 Acid Pump

Compact submersible pump designed for circulating strong acids and cleaning solutions. All parts are constructed of acid-resistant materials.

1 each	4603-0

### HK-31 Hose Kit

An accessory item available for use with the No. 31-TX Acid Pump. Kit includes two 1/2 inch tubing adapters, two 10 foot sections of 1/2 inch clear plastic tubing and three hose clamps.

1 each	4604-0

### Season Treat

Season Treat utilizes 6Rsp Micromet, a slowly dissolving phosphate, contained in a unique flowthrough package. The package design makes it simple to treat small cooling towers and evaporative condensers. Simply unwrap the package and place it in the sump. One canister treats up to 10 tons for scale (5 tons for corrosion) for five to six months.

	1	canister	4364-88
--	---	----------	---------

### Ty-lon<sup>®</sup> C70

Ty-Ion C70 is an all-organic liquid scale, deposit, and corrosion inhibitor for use in open recirculating cooling water systems, evaporative condensers, and air washer systems. This treatment program is particularly effective in preventing scale deposits in systems that utilize make-up water with high scaling potentials.

5 gallon pail	7597-05
15 gallon pail	7597-P3
55 gallon drum	7597-01

### No. 340 Liquid Scale Inhibitor

No. 340 is an extremely concentrated scale inhibitor that is effective in hard, highly alkaline water. It is very stable and does not form any sludge. It is most effective at treatment levels between 10 and 15 parts per million. A constant, accurate feed is accomplished with a Drip Feeder or CMS Feed Pump. USDA approved.

1 gallon bottle	4340-08
5 gallon pail	4340-05
55 gallon drum	4340-01

To Inhibit Scale Formation				
Tons of Refrigeration or Horsepower	Containers of Season Treat	Ty-lon C70 Required per Month	No. 340 Liquid Scale Inhibitor Required per Month	Bleed-off for Most Scale-forming Waters
10	1	1/4 gallon	1/4 gallon	1/8 gpm
30	3	2/3 gallon	1/2 gallon	1/3 gpm
50	5	1 gallon	3/4 gallon	1/2 gpm
100		2 gallons	1 1/2 gallons	1 gpm
120		2 1/2 gallons	2 gallons	1 1/4 gpm
150		3 gallons	2 1/2 gallons	1 1/2 gpm

## Water Treatment

### **Corrosion Prevention**



### Cal-Treat® No. 233

Cal-Treat No. 233 is a liquid formulation that is used for controlling severe corrosion in evaporative condensers and cooling tower systems. It is based upon a synergistic formulation of zinc, molybdate, and organic phosphonate. Provides superior corrosion control and inhibits scale accumulation.

5 gallon pail	4149-05
5 guilon puil	1112 03

To Control Corrosion		
Cal-Treat No. 233 Required per Month	Bleed-off for Most Corrosive Waters	Capacity of System in Tons of Horsepower
1/3 gallon	1/10 gpm	10
1 gallon	1/4 gpm	30
2 gallons	3/8 gpm	50
3 gallons	1/2 gpm	90

### **Algae Prevention**



### No. 85 Algaecide<sup>+</sup>

No. 85 Algaecide is a polymeric, cationic biocide that has been developed for controlling biological growth in equipment. It is an EPA registered product to kill algae, bacteria, and fungi in recirculating water systems, industrial air washing systems, and closed systems.

1 gallon bottl	e	4108-08
----------------	---	---------



### **Bromicide Tablets<sup>†</sup>**

A chlorine-bromine donating organic compound in tablet form. It slowly releases powerful oxidizing hypohalous acids, which prevent algae and slime bacteria fouling in open recirculating cooling water systems and evaporative coolers. It also has the capability of breaking up and removing existing biological mass from system surfaces. USDA approved and EPA registered.

50 lb. pail	4109-M9
-------------	---------

To Kill Algae or Slime Growth			
Tons of Refrigeration or Horsepower Gallons of No. 85 Algaecide per Month		Number of No. 90 Bromicide Tablets for an Average System	
10	1/6 gallon	5	
30	1/3 gallon	15	
50	1/2 gallon	25	
90	2/3 gallon	45	

### **Other Water Treatment Products**



### Humidi-Pro™

pH-Treat<sup>™</sup>

Humidi-Pro is designed for humidifiers using up to 25 gallons per day and will inhibit scale for one season. Install Humidi-Pro on the water line that supplies water directly to the humidifier.

	1 each	4190-02
--	--------	---------



+ EPA-registered product not available in Canada.

pH-Treat is an in-line treatment product specifically for the treatment of the acidic nature of the condensate water produced by today's high efficiency furnaces. Includes fitting kit for easy installation.

1 each	4720-06
--------	---------

### Other Water Treatment Products



### **Evap-Treat®**

Evap-Treat is used in evaporative coolers or "swamp coolers" to prevent scale and corrosion. Place it in the cooler sump and it will last all season long, thereby increasing pad life. Utilizes 6R Micromet<sup>®</sup>, a slow dissolving polyphosphate.

1 each (coolers up to 6,500 cfm)	4173-04
1 each (coolers up to 10,000 cfm)	4173-06



### **Water Sample Bottles**

The proper way to treat a cooling tower, closed loop system, or ice machine is to have the supply or makeup water tested. Nu-Calgon provides this valuable service for free and will analyze the water and recommend effective treatment. These bottles can also be used to send in glycol samples to test freeze points.

1 each (3 bottles) 4	4995-0
----------------------	--------



### No. 215 and No. 1075 Drip Feeders

Used for feeding No. 340 Liquid Scale Inhibitor, Cal-Treat 233, Ty-Ion C70 and No. 85 Algaecide. Calibrated at the factory to ensure accurate feeding. Provides the benefits of continuous treatment for small systems without the high cost usually associated with automatic feeding equipment.

No. 215 Drip F	eeder	4669-W3
No. 1075 Drip	Feeder	4670-W3



### **Jug Holders**

These should be used when drip feeding any of Nu-Calgon's liquid water treatment products. Once secured to the cooling tower or evaporative condenser, they will hold the 1 or 5 gallon containers in the proper position.

1 gallon holder	4606-0
5 gallon holder	4607-0



### No. 20L and No. 100L Feeders

Steel tanks suitable for pressures up to 150 psi and temperatures up to 212°F. Uses 3/4 inch FNPT connections for installing on bypass to any size line. Use No. 20L Feeder for initial charges up to 20 pounds (or 2 gallons). Use No. 100L Feeder for initial charges up to 100 pounds (or 10 gallons). Inlet/outlet strainers not included.

No. 20L Feeder	4628-0
No. 100L Feeder	4650-0

### **Plumbing Products**



### **Drain Solve**

Ideal for condensate pan drains, Drain Solve saves time and money with its ease of use. It eliminates application concerns associated with more reactive, fuming drain openers. Simply pour it down the drain and let it work without fear of noxious fumes or reactions. Does not contain sulfuric acid.

1 quart	4165-24	NSF
1 gallon	4165-08	NOL









### **Calci-Solve**

Remove scale from lines and clear clogged drains easily and effectively with Calci-Solve. The product includes a special inhibitor that coats the inside of the pipes with a protective film, allowing the acid in Calci-Solve to quickly dissolve calcium, magnesium, sodium, lime, rust, and other elements without harming pipes.

1 quart	4134-24
1 gallon	4134-08

### UrinaKleen

Keep urinals free flowing with UrinaKleen. Use it to dissolve urinary salts, mineral scale, and rust deposits which are found in urinals. It also attacks the primary source of odors.

1 quart	4590-24
1 gallon	4590-08

### A/C Drain Sucker®

A/C condensate drain pan overflow is caused by slime and sludge that builds up and clogs the drain line. The A/C Drain Sucker quickly removes the clog and the excess water, resolving the overflow problem. The kit includes a PurCool<sup>®</sup> Green 3 ton tablet to provide months of preventive treatment and free flowing drains, as well as all fittings and hoses for suction or pressure applications.

		Nu-Calgon Number	ClenAir Number
	A/C Drain Sucker kit	61308	CADS1
ilgon	PurCool Green 3 tons tablet	61048	

### Vital-Flo® Tankless Water Heater Descaler Kit

The Vital-Flo Tankless Water Heater Descaler Kit is a complete service tool for descaling tankless water heaters. It consists of a submersible descaler pump, a set of 5-foot long hoses with 3/4" female hose threaded assemblies, and a formulated descaler solution packaged in a lidded four gallon chemical resistant container. The solution is also available separately. NSF registered.

Vital-Flo kit	4387-01	(NSF)
Vital-Flo descaler solution	4387-02	<b>N</b> JL

# Water Filtration - Maintenance

### Water Filtration - Maintenance



### **Nickel-Safe Ice Machine Cleaner**

The original Nickel-Safe Ice Machine Cleaner. It is a food-grade citric-phosphoric acid product for removing scale deposits from ice machines having nickel-plated or tin-plated evaporators, and it is acceptable for use in all ice machines containing nickel. It mixes to form a green solution, which makes rinsing easier. USDA approved.

16 fluid ounce bottle	4287-34
1 gallon bottle	4287-08



### **Liquid Ice Machine Cleaner**

Liquid Ice Machine Cleaner is a food-grade phosphoric acid that is fast acting, yet safe to use. It has been formulated to remove scale deposits from ice machines and coffee urns. It does not give off any harsh fumes or contain chlorine or chlorides that would attack stainless steel. USDA approved. NSF registered.

8 fluid ounce bottle	4207-47	(NSF)
1 gallon bottle	4207-08	MOL



### IMS-III Sanitizing Concentrate<sup>+</sup>

IMS-III is an EPA registered sanitizing concentrate formulated to sanitize hard, non-porous surfaces and to eliminate odors and slime growths. No rinsing is required when diluted to 1.6 ounces per gallon. Formulated for general use in ice machines, ice cream dispensing equipment, and other food processing equipment.



### **6Rsp Micromet®**

6Rsp Micromet is a slow dissolving phosphate specifically formulated for inhibiting scale in ice machines and other equipment using low volumes of water. It is used in Nu-Calgon scale controlling cartridges and requires replacement once every six months. Typical dosage is 8 ounces per 500 pounds of ice (50 gallons of water) a day.

50 lb. pail	4265-50	(NSE)	

### Water Filtration - OEM Replacements



### **CFS Filtration System**

### A family of replacement cartridges and manifolds designed to service existing CUNO® CFS installations.

A cost-effective water filtration system for food service applications: ice machines, fountain beverages, steam ovens, and drinking water. These systems offer manifold and sanitary quick-change cartridges to fit the existing CUNO CFS brand installations and can also support new filtration installations. CFS is the reliable choice for water filtration to prevent unwanted troubles caused by sediment, scale, or taste and odor existing in CUNO installations.

Sediment – 5 micron	4623-10	Single Head	4623-01
Sediment – 5 micron / phosphate	4623-11	Twin Head	4623-02
Carbon Block5 micron	4623-12	Triple Head	4623-03
Carbon Block5 micron / phosphate	4623-13	Twin Series	4623-06



### **The CTL Series**

The CTL Series contains a matching product for the Tri-Liminator Filtration System with specifications that are nearly identical. For example, the CTL's primary cartridge (C0070) will replace both the K00070 and K00174 cartridges, and it has more scale control ability than either of the Tri-Liminator cartridges.

CTL 220	4610-30
Prefilter - EC210	4621-43
Primary cartridge - CG5-20S	9108-27

### **Water Filtration**



### Micro-Plus<sup>®</sup> & Micro-Carbon 4

The complete all-in-one treatment for ice machines, coffee urns and brewers, humidifiers, steamers, etc. The Micro-Plus "in-line" filters contain 6R Micromet<sup>®</sup> to control scale, high-grade activated carbon for eliminating objectionable tastes and odors, and filter discs to remove silt and sediment down to 20 microns. Available in four sizes with 1/4" FPT connections. When properly sized, each filter will last up to six months. The Micro-Carbon 4 is available for removing objectionable tastes and odors.

Micro-Plus 2	4615-W3
Micro-Plus 4	4612-W3
Micro-Plus 8	4613-Y8
Micro-Plus 16	4614-Y8
Micro-Carbon 4	4617-24

Application	Micro-Plus 2	Micro-Plus 4	Micro-Plus 8	Micro-Plus 16	Micro-Carbon 4
Water (per day)	12.5 gallons	25 gallons	50 gallons	100 gallons	50 gallons
lce (per day)	Up to 125 lbs.	Up to 250 lbs.	Up to 500 lbs.	Up to 1000 lbs.	
Coffee (per week)	25 lbs.(1,250 cups)	50 lbs. (2,500 cups)	100 lbs. (5,000 cups)	200 lbs. (10,000 cups)	

### Water Filtration - NP Series











Tose



These housings are designed to hold one of the NP Cartridges used to filter water for ice machines, coffee urns, and other beverage equipment. The NP24DD and NP48DD housings fit specific NP24 or NP48 cartridges for controlling scale, sediment, or objectionable tastes and odors. The NP24DD is equipped with 3/8" FPT connections and handles up to 4.0 gpm. The NP48DD is equipped with 1/2" FPT connections and can handle flow rates up to 5.0 gpm.

NP24DD	4704-24
NP48DD	4714-24

### 6R Micromet<sup>®</sup>/Carbon Cartridge

A custom cartridge, combining 6R Micromet for scale-control and a carbon block for sediment (10 microns), taste and odor control.

[	NP24PC	4706-87
	NP48PC	4716-87

### **Carbon Block Cartridge**

The NP24C Cartridge fits the NP24DD Housing while the NP48C fits the NP48DD. These carbon blocks will remove most objectionable tastes and odors and are rated to remove particulate down to 10 microns.

NP24C	4701-87
NP48C	4711-87

### Sediment Cartridge

The NP24S (5") and the NP48S (10") are made from FDA-approved polypropylene construction and filter down to 5 microns. In addition, the 10" and 20" versions are available in bulk packaging.

NP24S	4702-87
NP48S	4712-87
EC210, 20 <sup>"</sup> (10 microns)	4621-43

### **6R Micromet® Cartridge**

The NP246R Micromet Cartridge contains 1 pound of 6R Micromet, and it fits the NP24DD Housing. The NP486R Cartridge contains 2 pounds of 6R and fits the NP48DD Housing, with 10 micron filtration.

NP246R	4705-87
NP486R	4715-87

### 6R Micromet<sup>®</sup>/Sediment Cartridge

Another custom cartridge within the NP Series, consisting of polypropylene for filtration (5 microns) and phosphate for scale-control.


NP48PS	4717-87
CG5-205, 20″	9108-27

### **NP Series Brackets**

Some installations may require two or three NP Series housings to meet more than one specific waterrelated condition. This custom installation can be accomplished through the use of one of the NP Series multi-housing brackets.

Two housing brackets	NP2BR
Three housing brackets	NP3BR

Problem to Solve			Daily Capacities		
Cartridge Type	Sediment	Taste & Odor	Scale	"24's"	"48's"
"S" Cartridges	4			1800 lbs. (200 gal.)	3600 lbs. (400 gal.)
"C" Cartridges	4	4		1800 lbs. (200 gal.)	3600 lbs. (400 gal.)
"6R" Cartridges	4		4	900 lbs. (100 gal.)	1800 lbs. (200 gal.)
"PC" Cartridges	4	4	4	600 lbs. (65 gal.)	1200 lbs. (135 gal.)
"PS" Cartridges	4		4	N/A	550 lbs. (60 gal.)



### **EVERPUZE**®



### Heads









### QL3B Single System Head

Used with any Everpure filters. Head includes a water shut-off valve with mounting bracket and screws. (3/8 $^{"}$  NPT)

1 each	4621-07

### **QC7I Single Head**

Ideal for all Everpure filters. Head includes a shut off valve, flushing valve, and outlet pressure gauge on a box bracket design. (3/8" NPT)

1 each	4621-01
--------	---------

### **QC7I Twin Parallel Head**

Dual filter head that is parallel plumbed for two Everpure filters, either mix or match. Head includes a shut off valve, flushing valve, and outlet pressure gauge on a box bracket design. (3/4" NPT)

1 each	4621-02
--------	---------

### QC7I Triple Parallel Head

Triple filter head parallel plumbed for three Everpure filters. Head includes a shut off, flushing valve, and outlet pressure gauge on a box bracket design.  $(3/4^{"} \text{ NPT})$ 

		1 each	4621-03
--	--	--------	---------

### QC7I Quad Parallel Head

Quad filter head parallel plumbed for four Everpure filters. Head includes a shut off valve, flushing valve, and outlet pressure gauge on a box bracket design. (3/4" NPT)

1 each

4621-04

\*Everpure® is a trademark of Everpure, Inc., Westmont, IL.

### Systems



### **Kleensteam CT and Kleensteam II**

### Everpure's second generation water treatment system for steam applications.

Kleensteam is a total system delivering high quality filtered water with scale inhibition, as well as deliming capabilities. The dual cartridge design provides enhanced performance for low and high flow capacity steamers and flexibility for expanding to meet future needs. Kleensteam also reduces chlorine-induced corrosion. It's simple to install, operate, and maintain.

Kleensteam CT	1.67 gpm max. flow	9797-50
Kleensteam II	2.5 gpm max. flow	9797-21

### **High Flow CSR Manifold with Prefilter**

Utilizing the nu-MC<sup>2</sup> or the nu-XC<sup>2</sup> cartridges, this system provides premium quality water to high flow fountain dispensers, coffee makers, and ice machines. New and improved Micro-Pure II media inhibits the growth of bacteria. High Flow CSR reduces chlorine taste and odor and other offensive contaminants that can adversely effect the taste of beverages. Precoat submicron technology reduces dirt and particles as small as 1/2 micron and reduces health contaminants such as cysts. Additionally, the SRX Housing inhibits scale when it is equipped with scale-inhibiting IMF-10 ScaleSticks®.

High Flow CSR Manifold with Prefilter				
Twin Triple Quad				
10″	9294-02	9294-03	9294-04	
20″	9294-22	9294-23	9294-24	

### **Coldrink/Insurice Systems**

The Coldrink/Insurice manifolds can be used with any Everpure cartridges. i.e. the MC<sup>2</sup> or XC<sup>2</sup> for carbonated beverages or i2000<sup>2</sup> or i4000<sup>2</sup> for ice machines. Utilizes the systems' existing 10" or 20" prefilter on a single, twin, triple, or quad manifold. Systems come with the initial EC110 or EC210 prefilter cartidge. Just purchase the appropriate Everpure cartridge for your application.

Coldrink/Insurice Manifold with Prefilter					
Single Twin Triple Quad					
10″	9293-01	9293-02	9293-03	9293-04	
20″	9293-21	9293-22	9293-23	9293-24	

### Cartridges



### **4SI and 7SI Cartridges**

Specially designed for ice machines. This cartridge does not include carbon, which allows for compliance with ASHRAE Standard 188. The cartridge reduces sediment and particulate down to 1/2 micron and reduces cyst and Giardia. The filter allows chlorine to pass through, which helps reduce slime and bacteria growth inside the ice machine and ice bin. Helps reduce water borne bacteria that can cause Legionnaires' Disease. Ideal for food service operations where baking of bread and pastries is done on-site.

- Scale inhibition Cyst reduction • NSF standards 42 Particulate reduction
  - 1/2 micron rating

4SI	9606-51	(NSE)
Capacity: 15,000 gallons • 2.0 gpm flow rate		
7SI	9606-01	(NSF)

Capacity: 25,000 gallons • 3.5 gpm flow rate

# Everpure<sup>®</sup> Water Filtration

### Cartridges



### nu-i2000<sup>2</sup> and nu-i4000<sup>2</sup> Cartridges

Reduces water-related ice machine problems caused by dirt, objectionable tastes and odor and scale build-up. Pre-coat submicron filtration reduces particles as small as 1/2 micron along with chlorine and other offensive contaminants. In addition, both cartridges use 6R Micromet\*, a highly acclaimed scale inhibitor that inhibits scale build-up caused by dissolved minerals. NSF registered under NSF/ANSI Standards 42 and 53.

- Pre-coat filtration with Micro-Pure® II antibacterial protection
- Premier 6R Micromet scale control
- Cyst reduction
- Sanitary quick-change cartridge replacement

0 lbs. for most flakers	$\sim$
4621-11	NSE)
4	

Capacity: 12,000 gallons • 1,000 lbs. for most cubers • 2,000 lbs. for most flakers

### nu-MC<sup>2</sup> and nu-XC<sup>2</sup> Cartridges

Reduces chlorine taste, odor and other offensive contaminants that can adversely affect the taste of fountain beverages. Pre-coat submicron filtration reduces particles as small as 1/2 micron, and it helps retain carbonation in drinks. NSF registered under NSF/ANSI Standards 42 and 53.

- · Pre-coat filtration with Micro-Pure® II antibacterial protection
- · Reduces objectionable tastes and odors
- Cyst reduction
- · Sanitary quick-change cartridge replacement

nu-MC <sup>2</sup>	4621-20	(NSF)
Capacity: 9,000 gallons		
nu-XC <sup>2</sup>	4621-21	(NSF)
Capacity: 12,000 gallons		

### **BH<sup>2</sup> and OCS<sup>2</sup> Cartridges**

- Delivers premium quality water for ice and coffee applications
  - Designed for applications where the i2000<sup>2</sup> is too long
- Pre-coat submicron particulate reduction
- Inhibits scale formation
- Taste and odor reduction
- NSF registered under NSF/ANSI standards 42 and 53.

BH <sup>2</sup>	4621-12	(NSF)
Capacity: 3,000 gallons or 6,000 pots of c	offee • 0.5 gpm max. flow	$\sim$
OCS <sup>2</sup>	9618-07	(NSF)

Capacity: 1,500 gallons or 3,000 pots of coffee • 0.5 gpm max. flow

### **OW200L and OW4**Plus Cartridges

- Ideal for office or residential water systems
- Unique filter blend uses activated carbon to reduce chlorine taste, odor, and other offensive contaminants
- Reduces lead to below the Federal Action Level of 10 ppb
- Pre-coat submicron technology reduces dirt and particles as small as 1/2 micron
- Inhibits scale build-up in water-using appliances
- NSF registered under NSF/ANSI standards 42 and 53

OW200L	9619-06	(NSF)
Capacity: 480 gallons		
OW4 <sup>PLUS</sup>	9635-06	(NSE)
Capacity: 2,000 gallons		



0W200

\*Everpure® is a trademark of Everpure, Inc., Westmont, IL.









### **Cartridges**



### 4CB5, 7CB5, 4CB5-S, and nu-7CB5-S Cartridges

Carbon Block filter finely polishes water for high-quality beverages and food applications. NSF registered under NSF Standard 42.

- Problem-solving cartridge for high particulate or low flow water pressure areas
- Taste and odor, chlorine reduction
- Particulate reduction down to 5 microns
- 4CB5-S, and nu-7CB5-S cartridges control scale

		$\frown$
4CB5	4621-32	(NSF)
Capacity: 6,000 gallons		
7CB5	9618-16	(NSF)
Capacity: 10,000 gallons		
4CB5-S	4621-31	(NSF)
Capacity: 6,000 gallons		
nu-7CB5-S	4621-30	(NSF)
Capacity: 10,000 gallons		

### 4FC5, 7FC5, 4FC5-S, and 7FC5-S Cartridges

New Fiberdyne<sup>™</sup> II media with Agion<sup>®</sup> antimicrobial protection to inhibit potential bacterial growth. Balanced cartridge for optimum performance in varying water qualities. Helps retain the drink's carbonation.

<ul> <li>Increased capacity 25,000 gallons</li> <li>Taste and odor reduction</li> <li>Particulate reduction</li> <li>NSF standards 42 and 53</li> </ul>	<ul> <li>2.5 gpm flow rate</li> <li>5 micron rating</li> <li>Scale inhibition (4FC5-S and 7FC5-S)</li> </ul>
4FC5	9693-21 (NSF)
Capacity: 15,000 gallons	
7FC5	9693-61 (NSF)
Capacity: 25,000 gallons	
4FC5-S	9693-31 (NSF)
Capacity: 15,000 gallons	
7FC5-S	9693-71 (NSF)
Capacity: 25,000 gallons	

. . . .

### 4FC, 7FC, 4FC-S, and 7FC-S Cartridges

New Fiberdyne<sup>™</sup> II media with Agion<sup>®</sup> antimicrobial protection to inhibit potential bacterial growth. Balanced cartridge for optimum performance in varying water qualities. Improves the taste of fountain drinks and helps retain the drink's carbonation.

<ul><li>Taste and odor reduction</li><li>Particulate reduction</li><li>2.5 gpm flow rate</li></ul>	<ul> <li>1/2 micron rating</li> <li>NSF standards 42 and</li> <li>Scale inhibition (4FC-S</li> </ul>	
4FC	9692-21	(NSE)
Capacity: 15,000 gallons		
7FC	9692-61	(NSF)
Capacity: 25,000 gallons		$\bigcirc$
4FC-S	9692-31	(NSF)
Capacity: 15,000 gallons		
7FC-S	9692-71	(NSF)
Capacity: 25,000 gallops		$\bigcirc$

Capacity: 25,000 gallons



### Warewashing Filters



### Kleenware HTS-11 Scale Control System

Scale control for hot temperature applications such as warewashing and booster heaters. Inhibits limescale buildup and reduces corrosion. Features metering flow through head, high temperature housing and transparent HT-10 cartridge. Maximum feeder inlet temperature: 170.0°F/76.7°C

Kleenware HTS-11	9799-11
HT-10 Replacement cartridge	9799-22

### **Replacement Cartridges for CUNO®**



### CU and CU-S

The CU and CU-S cartridges are replacements that are compatible with the CUNO Series CFS 8000 filter cartridges. Both incorporate a carbon block filter that reduces objectionable tastes and odors, as well as chlorine and other contaminates, providing high-quality beverages and ice. They also reduce extra fine dirt as small as 5 microns. Additionally, the CU-S provides for the reduction of scale formation.

C	:U	4622-20

Capacity: 10,000 gallons (37,850 liters) • 1.5 gpm flow Replaces CFS-8112, CFS-8720 & CFS-8812

CU-S	4622-10
apacity: 10 000 gallons (3	7850 liters) • 1 5 apm flo

Capacity: 10,000 gallons (37,850 liters) • 1.5 gpm flow Replaces CFS-8112S,CFS-8720S & CFS-8812S

\*Everpure® is a trademark of Everpure, Inc., Westmont, IL. \*CUNO® is a trademark of 3M. This product is not manufactured, sponsored, or affiliated with 3M.

### **Other Filtration Products**



### 10" and 20" Coarse Prefilters

A 10<sup>°</sup> and 20<sup>°</sup> black housing, each including a 10<sup>°</sup> and 20<sup>°</sup> replaceable prefilter cartridge. Filters out larger dirt and rust particles, thereby extending the life of submicron and carbon block filters.

E-10	4621-42
E-20	4621-44

Optional: Prefilter bracket kit for all multiple filter head systems manufactured after 2003: 4621-45



### **SRX Scale Inhibitor Feeder**

A complete system for the control of scale in ice, coffee, steam, and combination applications. It dispenses a controlled amount of HydroBlend<sup>™</sup> compound, which provides for a more consistent feed and longer life. The system includes a black housing and one cartridge

1 each 4621-05

Optional: Post-filter bracket kit for all multiple filter head systems manufactured after 2003: 4621-06



### 4JT Flushing/Sanitizing Cartridge

The preferred way to introduce ScaleKleen<sup>™</sup> Scale Remover or other sanitizing agents, such as bleach, into all water-using equipment and vending machines. Fits into existing Everpure heads. Eliminates the need for difficult component disassembly. Easy and convenient to help you clean and maintain equipment.

1 each 4621-00



### EC110 and EC210

A 10" and 20" 10-micron nominal filtration cartridge for filtering out larger dirt and rust particles, extending the life of primary filters. For use in the E-10 and E-20 housings as well as other 10" and 20" housings.

EC110 (10″)	4621-41
EC210 (20″)	4621-43

### IMF-7 and IMF-10

Ice Machine Feeder scale inhibition cartridge. The translucent cartridge allows for easy visual monitoring of the product's usage. The larger IMF-10 will last longer or treat higher volumes of water.

IMF-7	Replacement for AR-X 7" Housing	4621-13
IMF-10	Replacement for SS-10 Scale Sticks	4621-14

### ScaleKleen<sup>™</sup> Scale Remover

Restores equipment to peak operating efficiency by removing scale build-up. Quickly removes limescale from coffee brewers. Ideal for deliming steam and ware washing equipment. Great for office coffee system (OCS) applications. Non-toxic, safe to skin, and won't burn clothing. Sewer system disposable; can be poured down the drain. Use with 4JT Flushing/ Sanitizing Cartridge.

7 oz. packets (24 per case)	4621-17
2.2 lb. canister (4 per case)	9798-35

### Free Seminars and Training Classes

### NATE training now online. Visit us at www.nucalgon.com.

**Coil Cleaning:** The Clean Coil Program is a comprehensive seminar dedicated to the safe and proper procedures to clean evaporator and condenser coils. The program will help determine which cleaning method should be utilized for a particular job based on the type and condition of the unit.

NATE Recognition Classes: 1 hour Continuing Education Accreditation

**Indoor Air Quality Management:** The seminar covers the past, present and future of indoor air quality (IAQ). Topics covered in the session: how poor IAQ impacts a business, common causes of poor IAQ, and how to prevent poor IAQ from occurring. NATE Recognition Classes: 1 hour Continuing Education Accreditation

**Refrigeration Oils:** An in-depth look at industry refrigeration oils (Mineral, Alkylbenzene, and POE) and when and where to use them. NATE Recognition Classes: 1.5 hours Continuing Education Accreditation

**Total System Protection:** A thorough look at why burnouts occur, how to prevent them and the proper way to flush a system once a burnout occurs. The training will include acid testing and acid neutralization.

NATE Recognition Classes: 1 hour Continuing Education Accreditation

Water Treatment: This seminar will cover the fundamentals of water treatment for cooling towers, evaporative condensers, boilers, and chillers. NATE Recognition Classes: 1.5 hours Continuing Education Accreditation

**Ice Machine Treatment and Filtration:** A complete guide to "Extending the Life of an Ice Machine." The seminar will answer the questions: why use a filter, what filter should be used, and how to keep the system clean, clear, and running properly. It also addresses all of the water-related problems associated with ice machines. (1.5 hours)

Winter Water Treatment: This program focuses on what a system needs prior to the winter season, including a review of ethylene and propylene glycol, the proper treatments for hot/cold closed systems, and low make-up steam systems. (1 hour)

**Energy Savings with A/C Re-New:** Learn about a revolutionary product for revitalizing and energizing A/C systems. The seminar will explain how A/C Re-New will help reduce energy costs, improve cooling performance and reduce the system noise. (1 hour)

**Food Service Products for Ice & Beverage Filtration:** A comprehensive look at the problems associated with ice and beverage filtration as well as treatment options to solve these problems. This seminar covers products for ice makers, coffee brewers, fountain beverage machines, steam ovens, drinking water, and more. (1 hour)

**Nu-Calgon Product Line Review:** The seminar provides an overview of all the major products that Nu-Calgon offers. The presentation explores when and where to use certain products, as well as explains how using certain products can save time and money. (2 hours)



NATE-Recognized

NATE-Recognized


**Training Provider** 









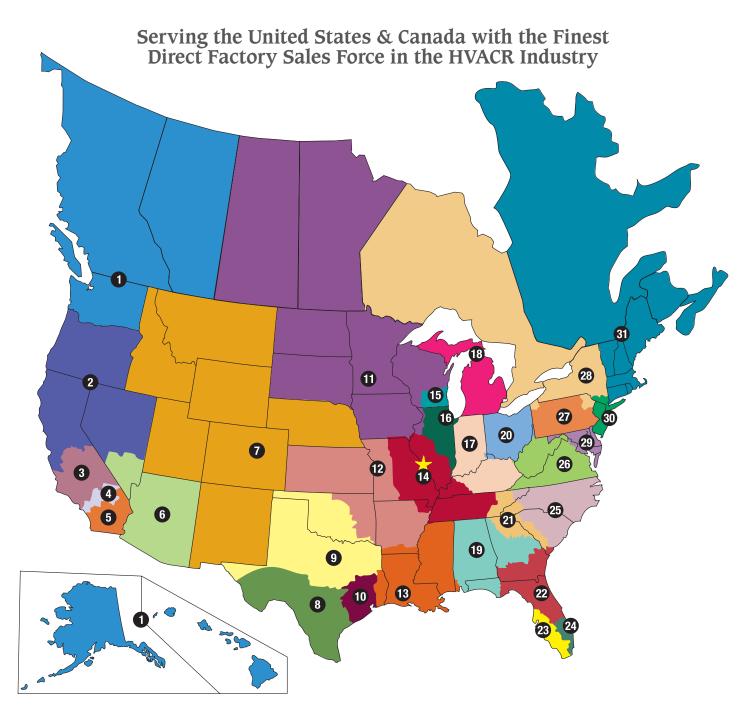

- 1. Seattle, WA
- 2. Northern CA
- 3. Los Angeles, CA
- 4. Orange County, CA
- 5. San Diego, CA
- 6. Phoenix, AZ
- 7. Denver, CO
- 8. San Antonio, TX
- 9. Dallas Fort Worth
- 10. Houston, TX
- 11. St. Paul Minneapolis

- 12. Kansas City, MO
- 13. Baton Rouge, LA
- 14. St. Louis, MO
- 15. Milwaukee, WI
- 16. Chicago, IL
- 17. Indianapolis, IN
- 18. Detroit, MI
- 19. Birmingham, AL
- 20. Columbus, OH
- 21. Atlanta, GA
- 22. Ocala, FL

- 23. Tampa, FL
- 24. Miami, FL
- 25. Raleigh, NC
- 26. Richmond, VA
- 27. Philadelphia, PA
- 28. Syracuse, NY
- 29. Baltimore, MD
- 30. NYC/New Jersey
- 31. Boston, MA
- 🗙 St. Louis, MO (Hdq.)

















Nu-Calgon 2008 Altom Court | St. Louis, M0 63146 phone: 800-554-5499 | fax: 800-221-6302 www.nucalgon.com

(717) 3-300 | Calgon is a licensed trade name.

第二日 日 日 トート