Job Name:	
Tag#	



Submittal Data Sheet

FDXS09LVJU

.75-Ton Ducted Concealed Indoor Unit





Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. If product is installed in a commercial application, limited warranty period is 5 years.

Electrical *208/230\v		
	Cooling	Heating
Running Current (Rated) (A)	.58/.52*	.58/.52*
Power Consumption (Rated) (W)	72/72*	72/72*


Indoor Specifications Cooling Heating Н М Н М Airflow Rate (cfm) 305 280 305 280 L SL L SL 260 260 235 235 Sound (dBA) 35 / 33 / 31 35 / 33 / 31 H/M/LDimensions (H × W × D) (in) 7-7/8 × 27-9/16 × 24-7/16 Weight (Lbs) 47 9,000 Nominal Capacity (Btu/hr)

Piping			
Liquid (in)	1/4		
Gas (in)	3/8		
Drain (in)	25/32		

*See Outdoor Unit for Rated Capacities

FDXS09LVJU Dimensional Data



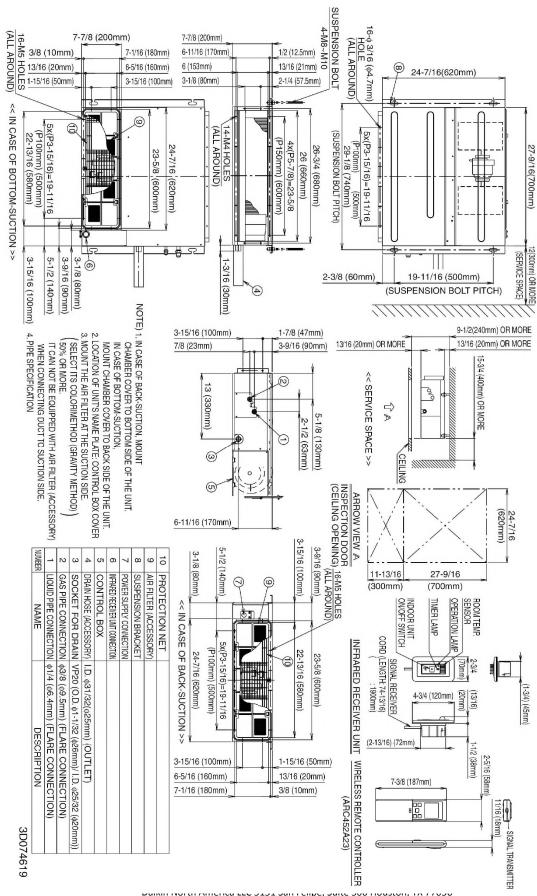

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018



Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller kit
	BRCW901A08	Wired Remote Controller Cable – 25ft (included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10ft
	DACA-ARCW901P10	IR Receiver Cable, Plenum Rated, 10ft
	DACA-ARCW901P25	IR Receiver Cable, Plenum Rated, 25ft
	DACA-CP2-1	Maxi Orange Condensate Pump
	DACA-CP3-1	Mini Condensate Pump 5 gph
	KRP928BB2S	Interface Adaptor for DIII-NET

External Static Pressure / Airflow Chart



